1. ALL RESISTANCE VALUES ARE IN OHMS, 0.1 WATT +/- 5%.
2. ALL CAPACITANCE VALUES ARE IN MICROFARADS.
3. ALL CRYSTALS & OSCILLATOR VALUES ARE IN HERTZ.

051-7173 MLB

3/21/2007 POST RAMP

REV	ZONE	ECN	DESCRIPTION OF CHANGE	CK APPD DATE	ENG APPD DATE
G		494020	PRODUCTION RELEASED	03/21/07	?

Page	(.csa)	Contents	DRI	Sync	Date
1	1	Table of Contents	RX	N/A	N/A
2	2	SYSTEM BLOCK DIAGRAM	RX	MASTER	5/23/05
3	3	Power Block Diagram	MK	POWER	06/30/2005
4	4	CONFIGURATION OPTIONS	RX	SMC	07/18/2005
5	5	FUNC TEST 1 OF 2	RX	TP	07/25/2005
6	6	SIGNAL ALIAS /RESET	RX	ENET	08/19/2005
7	7	CPU 1 OF 2-FSB	RX	MASTER	05/03/2005
8	8	CPU 2 OF 2-PWR/GND	MK	MASTER	05/03/2005
9	9	CPU DECAPS & VID<>	MK	SMC	08/19/2005
10	10	CPU MISC1-TEMP SENSOR	ES	ENET	08/19/2005
11	11	CPU ITP700FLEX DEBUG	RX	MASTER	5/23/05
12	12	NB CPU Interface	MK	NB	07/25/2005
13	13	NB PEG / Video Interfaces	DK	NB	07/25/2005
14	14	NB Misc Interfaces	RX	NB	08/15/2005
15	15	NB DDR2 Interfaces	LT	NB	07/25/2005
16	16	NB Power 1	DK	NB	07/25/2005
17	17	NB Power 2	DK	NB	07/25/2005
18	18	NB Grounds	DK	NB	07/25/2005
19	19	NB (GM) Decoupling	DK	NB	06/22/2005
20	20	NB Config Straps	DK	NB	06/28/2005
21	21		RX	SB	08/05/2005
22	22		RX	ENET	11/16/2005
23	23		RX	ENET	11/28/2005
24	24		RX	SB	08/05/2005
25	25		RX	SB	06/28/2005
26	26	SB Misc	RX	NB	07/26/2005
27	27	M42 SMBUS CONNECTIONS	ES	ENET	08/30/2005
28	28	DDR2 SO-DIMM Connector A	LT	MEMORY	06/20/2005
29	29	DDR2 SO-DIMM Connector B	LT	MEMORY	06/20/2005
30	30	Memory Active Termination	LT	MEMORY	06/20/2005
31	31	Memory Vtt Supply	LT	(MASTER)	(MASTER)
32	33	CLOCKS	DK	CLOCK	06/03/2005
33	34	CLOCK TERMINATION	DK	CLOCK	06/06/2005
34	38	PATA CONNECTOR	ES	ENET	11/01/2005
35	39	SATA CONNECTOR	ES	ENET	11/14/2005
36	41	ETHERNET CONTROLLER	ES	ENET	12/06/2005
37	42	ETHERNET CONNECTOR	ES	ENET	11/14/2005
38	44	FIREWIRE CONTROLLER	ES	ENET	08/30/2005
39	45	FIREWIRE PORT	ES	ENET	11/16/2005
40	49	CONNECTOR MISC	ES	ENET	11/16/2005
41	51	IR CONTROLLER	ES	ENET	11/09/2005
42	52		ES	ENET	11/01/2005
43	53		ES	ENET	08/19/2005
44	54	BLUETOOTH INTERFACE	MK	ENET	08/29/2005
45	58	SMC	MK	SMC	08/18/2005
46	59	SMC SUPPORT	LD	SMC	08/23/2005
47	60	LPC+ Debug Connector	MK	NB	06/30/2005
48	61	CPU Current & Voltage Sense	ES	ENET	08/30/2005
49	62	TEMPERATURE SENSE	RX	ENET	11/09/2005
50	63	SPI BOOTROM	ES	MASTER	5/23/05
51	65	Fan	MK	ENET	11/10/2005
52	66	SMS	RX	SMC	08/23/2005
53	67	TPM	DK	SMC	07/18/2005
54	68	AUDIO: CODEC	DK	M42AUDIO	08/05/2006
55	72	AUDI0: SPEAKER AMP	DK	M42AUDIO	08/05/2006
56	73	AUDIO: JACK	DK	M42AUDIO	08/05/2006
57	74	AUDIO: JACK TRANSLATORS	MK	M42AUDIO	08/05/2006
58	75	IMVP6 CPU VCore Regulator	MK	POWER	07/13/2005
59	76	5V / 3.3V Power Supply	MK	POWER	07/13/2005
60	77	2.5V/1.2V Regulator	MK	ENET	12/06/2005
61	78	1.8V Supply	MK	POWER	07/13/2005
62	79	1.5V / 1.05V Power Supply	MK	POWER	07/13/2005
63	80	S3/S0 FETS, G3H SUPPLY	MK	ENET	08/30/2005
64	81	Power Conn / Alias	MK	ENET	11/16/2005
65	82	DC-In & Battery Connectors	MK	POWER	07/13/2005
66	83	PBUS Supply/Battery Charger	ES	SMC	08/19/2005
67	94	INVERTER,LVDS,TMDS	DK	GRAPHIC	06/06/2005
68	95	EXTERNAL TMDS	DK	GRAPHIC	06/06/2005
69	98	MINI-DVI CONNECTOR		EUGENE	05/21/05
70	99	Cross Reference Page			
71	100	Cross Reference Page			
72	101	Cross Reference Page			
73	102	Cross Reference Page			
74	103	Cross Reference Page			
75	104	Cross Reference Page			
76	105	Cross Reference Page			
77	106	Cross Reference Page			
78	107	Cross Reference Page			

EE DRIS:

RX-RAYMOND XU
DK-DINESH KUMAR
RC-RAY CHANG
MK-MARC KLINGELHOFER
LT-LAWRENCE TAN
ES-ERIC SMITH
LD-LINDA DUNN

Schematic / PCB #'s

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
051-7173	1	SCHEM,MACBOOK,MLB	SCH	
820-1889	1	PCBF,MACBOOK,MLB	PCB	

DRAWING
TITLE=U230
ABBREV=DRAWING
LAST_MODIFIED=Wed Mar 21 11:33:29 2007

DIMENSIONS ARE IN MILLIMETERS
XX ±
X.XX ±
X.XXX ±
ANGLES °
DO NOT SCALE DRAWING
THIRD ANGLE PROJECTION

METRIC

DRAFTER		DESIGN CK	
ENG APPD		MFG APPD	
QA APPD		DESIGNER	
RELEASE		SCALE	NONE

MATERIAL/FINISH NOTED AS APPLICABLE
SIZE D

Apple Computer Inc.

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

TITLE
SCHEM,MLB,MACBOOK

DRAWING NUMBER 051-7173
REV. G
SHT 1 OF 108

WWW.AliSaler.Com

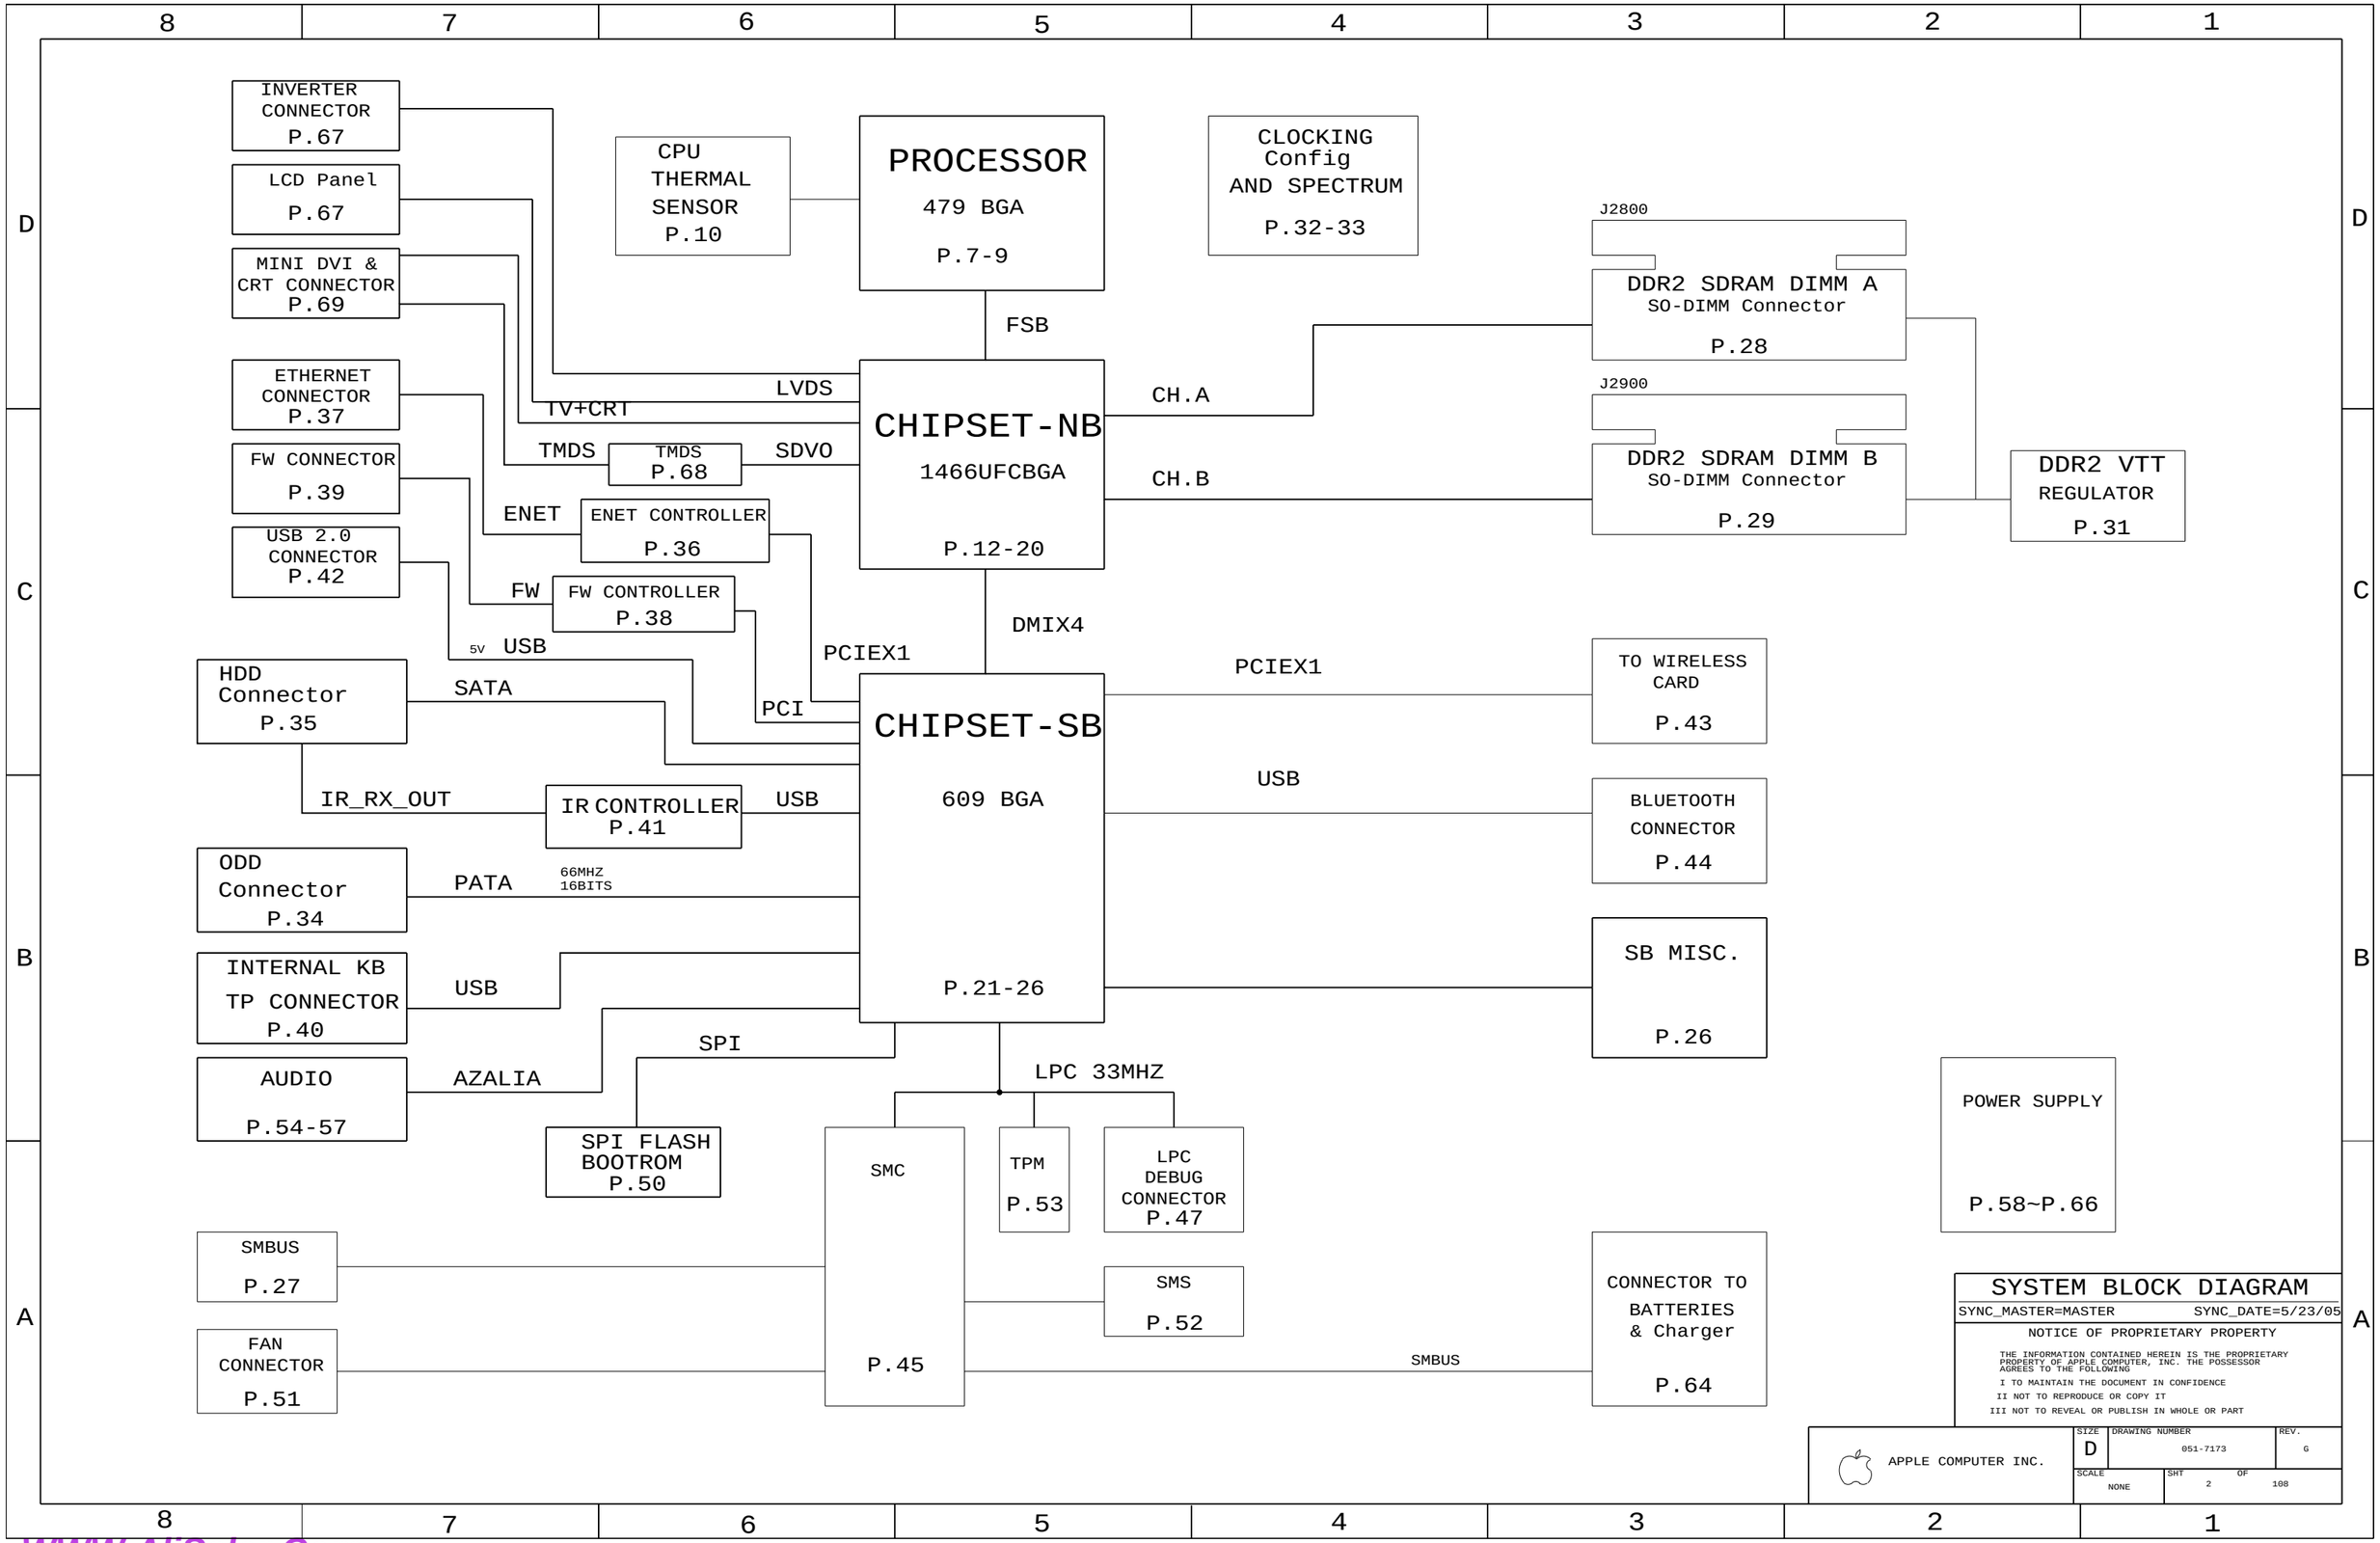

SYSTEM BLOCK DIAGRAM

SYNC_MASTER=MASTER SYNC_DATE=5/23/05

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE NONE SHT 2 OF 108

WWW.AliSaler.Com

M42A POWER SYSTEM ARCHITECTURE

AC ADAPTER IN
DCIN
6A FUSE
U8370
SMC_DCIN_ISENSE
PBUS CONVERTER/ BATTERY CHARGER
ISL6255
U8300
(PAGE 65)
CHGR_EN (S5)
PPVBAT_S5_CHGR_REG
7A FUSE
U8310
PPBUSA_G3H
PBUSB_VSENSE
Q6150
ENABLE
3.425V G3HOT
LT3470
U8090
(PAGE 62)
PP3V42_G3H_REG
SMC PWRGD
MC33465N_30ATR
U5900
(PAGE 45)
SMC_RST_L
U8375
SMC_BATT_ISENSE
BATTERY
BATT_POS_F
3S2P / 3S3P
1V5S0_RUNSS (S0)
1V05S0_RUNSS (S0)
1.5V
1.05V
LTC3728
U7900
(PAGE 61)
PP1V5_S0
(6A MAX CURRENT)
PP1V05_S0
(8A MAX CURRENT)
1V51V05S0_PGOOD
U6100
SMC_CPU_VSENSE
SMC_CPU_ISENSE
CPUVCORE
ISL6262
U7500
(PAGE 57)
PPVCORE_CPU_S0
(36A MAX CURRENT)
IMVP_VR_ON (S0)
VR_PWRGD_CK410_L
VR_PWRGOOD_DELAY
CLOCK
CY28445-5
U3301
(PAGE 33)
CK410_PD_VTT_PRGD_L
U2603
VR_PWRGD_CK410
ICH
U2601
PM_SB_PWROK
PLT_RST_L
CPU_PWRGD
Q8000
Q8005
P5VS3_EN_L_RC (S3)
P5VS0_EN_RC (S0)
PP5V_S3
PP5V_S0
PP5V_S5
PP5V_S5_REG (5A MAX CURRENT)
PP3V3_S5_REG (4A MAX CURRENT)
PPBUSB_G3H
SMC
U5800
(PAGE 44)
SMC_PM_G2_ENABLE (S5)
Q8060
Q8059
5VS5_RUNSS (S5)
3V3S5_RUNSS (S5)
LOGIC
CHGR_EN
5V
3.3V
LTC3728
U7600
(PAGE 58)
5V3V3S5_PGOOD
RSMRST_PWRGD
TV 3.3V
MM157
U1901
(PAGE 19)
PP3V3_S0_NB_TVDAC
AUDIO 4.5V
TPS79501
VR6800
(PAGE 68)
PP4V5_AUDIO_ANALOG
PP3V3_S0_AUDIO (S0)
CPU
PWRGOOD
RESET*
MCH
PWROK
HCPURST*
FSB_CPURST_L
Q8010
P3V3S3_EN_L_RC (S3)
PP3V3_S3
2.5V
MAX8887
U7700
(PAGE 59)
PP2V5_S3
(0.3A MAX CURRENT)
Q8015
P3V3S0_EN_RC (S0)
PP3V3_S0
PP2V5_S0
PP3V3_S5
PP2V5_S0_NB_DISP_PLL
MCH DPLL 1.5V
TPS73115
U1900
(PAGE 19)
PP1V5_S0_DPLL
LTC2908
U8070
(PAGE 62)
S0PWRGD_OK
U8080
ALL_SYS_PWRGD
SMC
U5800
(PAGE 44)
RSMRST_OUT(P15)
PWRGD(P12)→99ms DLY
IMVP_VR_ON(P16)
RSMRST_IN(P13)
PLT_RST*
SMC_ONOFF_L
PWR_BUTTON(P90)
P17(BTN_OUT)
PM_RSMRST_L
IMVP_VR_ON
PM_PWRBTN_L
SMC_RST_L
BATTERY ONLY: 05
ADAPTER IN : 08-1
SLP_S5_L(P95)
SLP_S4_L(P94)
SLP_S3_L(P93)
ICH
SLP_S5_L
SLP_S4_L
SLP_S3_L
PP1V8_S3_REG
PP1V8_S0
(8A MAX CURRENT)
P1V8S0_EN_L_RC (S0)
PM_SLP_S4_L (S3)
1.8V
ISL6269
U7800
(PAGE 60)
PP5V_S0_MEMVTT
0.9V
BD3535FVM
U3100
(PAGE 31)
PP0V9_S0
1.2V
MAX8516
U7720
(PAGE 59)
PP1V2_S3_ENET
PP1V2_S0
P1V2_S0_EN
PPBUS_S5_FWPWRSW
P1V2S0_EN
1V5S0_RUNSS (S0)
1V05S0_RUNSS (S0)
P5VS0_EN_RC (S0)
P3V3S0_EN_RC (S0)
P1V8S0_EN_L_RC (S0)
P1V2S0_EN (S0)
P3V3S3_EN_L_RC (S3)
P5VS3_EN_L_RC (S3)

SIGNAL DELAY TIME

IMVP_VR_ON	99ms
S0PWRGD_OK	200ms
VR_PWRGOOD_DELAY	7ms

POWER ON SEQUENCE LIST

PWR/RST STATUS	STEP
G3H POWER ON	01-04
S5 POWER ON	01,05-09
S3 POWER ON	10-13
S0 SYSTEM POWER ON	14-18
S0 CPU POWER ON	17,19-24
PLATFORM,CPU RESET	25-27

STEP 06 (S5 POWER STATUS)TRUTH TABLE

NO AC/BATTERY	L(S5 OFF)
BATTERY ONLY	L(S5 OFF)
ACIN WITH/WITHOUT BATTERY	H(S5 ON)
BATTERY ONLY,PRESS PWR BUTTON	H(S5 ON)

Power Block Diagram

SYNC_MASTER=POWER SYNC_DATE=06/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 3 OF 108	

WWW.AliSaler.Com

Page Notes

Power aliases required by this page:
(NONE)

Signal aliases required by this page:
(NONE)

BOM options provided by this page:
(NONE)

BOM OPTION

BOMOPTION	M42A GOOD ST MICRO 630-7795 EVT	M42A BETTER ST MICRO 630-7796 EVT	M42A BEST KIONIX 630-7799 EVT	M42A GOOD KIONIX 630-7798 EVT	M42A BETTER KIONIX 630-7736 EVT	M42A BEST ST MICRO 630-7797 EVT
1V51V05S0_CONT						
1V51V05S0_SKIP	V	V	V	V	V	V
5V3V3S3_CONT						
5V3V3S3_SKIP	V	V	V	V	V	V
ACCEL_KIONIX			V	V	V	
ACCEL_ST	V	V				V
INVERTER_BUF	V	V	V	V	V	V
INVERTER_UNBUF						
ITP						
LEMENU	V	V	V	V	V	V
MEMVTT_EN_PU	V	V	V	V	V	V
NBCFG_DMI_REVERSE						
NBCFG_DMI_X2						
NBCFG_DYN_ODT_DISABLE						
NBCFG_PEG_REVERSE						
NBCFG_SDVO_AND_PCIE						
NBCFG_VCC_1V5						
NO_REBOOT_MODE						
USB_C_OC_PU	V	V	V	V	V	V
USB_D_OC_PU	V	V	V	V	V	V
USB_E_OC_PU	V	V	V	V	V	V
GOOD	V			V		
BETTER		V			V	
BEST			V			V
M42A_PGM	V	V	V	V	V	V
ONEWIRE_PULLUP	V	V	V	V	V	V
ONEWIRE_PULLUP_OLD						
ONEWIRE_PU_PROT	V	V	V	V	V	V
ONEWIRE_PU_ACOK						
ONEWIRE_PWRCTL	V	V	V	V	V	V
ONEWIRE_ALWAYSON						
3V3_IND_2MM8	V	V	V	V	V	V
3V3_IND_3MM						
NORMAL	V	V		V	V	
FANCY			V			V
STANDOFF	V	V	V	V	V	V
FET_FDN6296	V	V	V	V	V	V
FET_STL8NH3LL						
GOOD-ST	V					
BETTER-ST		V				
BEST-KIONIX			V			
GOOD-KIONIX				V		
BETTER-KIONIX					V	
BEST-ST						V
TPM						
PVT-DIMM						
POST-RAMP-DIMM35	V	V	V	V	V	V
M42						
M42A	V	V	V	V	V	V

BOARD STACK-UP AND CONSTRUCTION

Top		SIGNAL
2		GROUND
3		SIGNAL(High Speed)
4		SIGNAL(High Speed)
5		GROUND
6		POWER
7		POWER
8		GROUND
9		SIGNAL(High Speed)
10		SIGNAL(High Speed)
11		GROUND
BOTTOM		SIGNAL

MLB STACKUP

LAYER	THICKNESS (MM)	TRACE WIDTH (MM)
CONFORMAL_COAT	0.018	
L1 SIGNAL(TOP)	0.047	0.1
L1-L2	0.07	
L2 GROUND	0.014	---
L2-L3	0.076	
L3 SIGNAL	0.014	0.079
L3-L4	0.156	
L4 SIGNAL	0.014	0.079
L4-L5	0.076	
L5 GND	0.014	---
L5-L6	0.07	
L6 POWER	0.031	---
L6-L7	0.076	
L7 POWER	0.031	---
L7-L8	0.07	
L8 GROUND	0.014	---
L8-L9	0.076	
L9 SIGNAL	0.014	0.1
L9-L10	0.156	
L10 SIGNAL	0.014	0.1
L10-L11	0.076	
L11 GROUND	0.014	0.1
L11-L12	0.07	
L12 SIGNAL(BOTTOM)	0.047	0.1
CONFORMAL_COAT	0.018	
TOTAL	1.276	---

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
337S3450	1	IC,MEROM,CPU L2 DC 1.83GHZ,479 PGA	U0700	GOOD
337S3389	1	IC,MEROM,CPU B2 DC 2.0GHZ,479 PGA	U0700	BETTER
337S3389	1	IC,MEROM,CPU B2 DC 2.0GHZ,479 PGA	U0700	BEST

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
338S0268	1	IC,FW32306,1394A LINK,BGA,129P	U4400	LEMENU
338S0270	1	IC,88E8053,GIGABIT ENET XCVR,64P QFN, NO	U4101	LEMENU
359S0109	1	IC,SLG8LP436,CLOCK GEN,68PIN QFN	U3301	LEMENU

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
341S2104	1	IC, 16MBIT 8-PIN SPI SERIAL FLASH,SOIC8	U6301	M42A_PGM
341S1797	1	IC,EEPROM,SERIAL IIC,8KBIT,SO8	U4102	M42A_PGM
341S1946	1	IC,SMC,176P BGA,HS8/2116	U5800	M42A_PGM
341S1890	1	IC,PSOC+W/USB,56P,MLF,CY8C24794	U5100	M42A_PGM

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
826-4393	1	LBL,P/N LABEL,PCB,28MMX6MM	EEE:WES	CRITICAL	GOOD-ST
826-4393	1	LBL,P/N LABEL,PCB,28MMX6MM	EEE:WET	CRITICAL	BETTER-ST
826-4393	1	LBL,P/N LABEL,PCB,28MMX6MM	EEE:WEW	CRITICAL	BEST-KIONIX
826-4393	1	LBL,P/N LABEL,PCB,28MMX6MM	EEE:WEV	CRITICAL	GOOD-KIONIX
826-4393	1	LBL,P/N LABEL,PCB,28MMX6MM	EEE:W6V	CRITICAL	BETTER-KIONIX
826-4393	1	LBL,P/N LABEL,PCB,28MMX6MM	EEE:WEU	CRITICAL	BEST-ST

CONFIGURATION OPTIONS

SYNC_MASTER=SMC SYNC_DATE=07/18/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	4	108

WWW.AliSaler.Com

Functional Test Points

Power Supply NO_TESTs

NO_TEST

I93		IMVP6_RBIAS	58
I94		IMVP6_COMP	58
I95		5VS5_RUNSS	59 63
I96		1V5S0_RUNSS	62 63
I101		1V8S3_COMP	61
I102		1V8S3_FSET	61
I103	TRUE	3V3S5_COMP	
I104	TRUE	3V3S5_FSET	
I106	TRUE	1V05S0_COMP	
I105	TRUE	1V05S0_FSET	
I107	TRUE	P3V42G3H_FB	63

CLOCK NO_TESTS

NO_TEST

I111	TRUE	CK410_CPU0_N	32 33
I112	TRUE	CK410_CPU0_P	32 33
I113	TRUE	CK410_CPU1_N	32 33
I115	TRUE	CK410_CPU1_P	32 33
I114	TRUE	CK410_CPU2_ITP_SRC10_N	32 33
I116	TRUE	CK410_CPU2_ITP_SRC10_P	32 33
I117	TRUE	CK410_DOT96_27M_N	32 33
I118	TRUE	CK410_DOT96_27M_P	32 33
I119	TRUE	CK410_LVDS_N	32 33
I120	TRUE	CK410_LVDS_P	32 33
I122	TRUE	CK410_PCI4_CLK_SPN	
I122	TRUE	CK410_PCIF1_CLK	32 33
I123	TRUE	CK410_SRC1_N_SPN	6
I124	TRUE	CK410_SRC1_P_SPN	6
I125	TRUE	CK410_SRC2_N	32 33
I183	TRUE	CK410_SRC2_P	32 33
I184	TRUE	CK410_SRC3_N_SPN	6
I185	TRUE	CK410_SRC3_P_SPN	6
I186	TRUE	CK410_SRC4_N	32 33
I187	TRUE	CK410_SRC4_P	32 33
I188	TRUE	CK410_SRC5_N	32 33
I189	TRUE	CK410_SRC5_P	32 33
I190	TRUE	CK410_SRC6_N	32 33
I191	TRUE	CK410_SRC6_P	32 33
I192	TRUE	CK410_SRC7_N_SPN	6
I193	TRUE	CK410_SRC7_P_SPN	6
I194	TRUE	CK410_SRC8_N	32 33
I195	TRUE	CK410_SRC8_P	32 33
I196	TRUE	CK410_SRC_CLKREQ1_L_SPN	6
I197	TRUE	CK410_SRC_CLKREQ3_L_SPN	6
I198	TRUE	CK410_SRC_CLKREQ8_L	32 33

FIREWARE NO_TESTS

NO_TEST

I199	TRUE	FW_B_TPA_N_SPN	6
I200	TRUE	FW_B_TPA_P_SPN	6
I201	TRUE	FW_B_TPBIAS_SPN	6
I202	TRUE	FW_B_TPB_N_SPN	6
I203	TRUE	FW_B_TPB_P_SPN	6
I204	TRUE	FW_C_TPA_N_SPN	6
I205	TRUE	FW_C_TPA_P_SPN	6
I206	TRUE	FW_C_TPBIAS_SPN	6
I207	TRUE	FW_C_TPB_N_SPN	6
I208	TRUE	FW_C_TPB_P_SPN	6

LVDS NO_TESTS

NO_TEST

I209	TRUE	LVDS_B_CLK_N_SPN	6
I210	TRUE	LVDS_B_CLK_P_SPN	6
I211	TRUE	LVDS_B_DATA_N0_SPN	6
I212	TRUE	LVDS_B_DATA_N1_SPN	6
I213	TRUE	LVDS_B_DATA_N2_SPN	6
I214	TRUE	LVDS_B_DATA_P1_SPN	6
I215	TRUE	LVDS_B_DATA_P2_SPN	6

ETHERNET NO_TESTS

NO_TEST

I216	TRUE	ENET_MDI_TRAN_P<2>	37
I217	TRUE	ENET_MDI_TRAN_N<2>	37
I218	TRUE	ENET_MDI_TRAN_P<3>	37

NO_TEST

I219	TRUE	SMC_FAN_3_TACH	45 46
I220	TRUE	ALS_LEFT	45 46

Fan Connectors

FUNC_TEST

I12	TRUE	=PP5V_S0_FAN_RT	51 64
I15	TRUE	FAN_RT_PWM	51
I16	TRUE	FAN_RT_TACH	51
I17	TRUE	=PP3V3_S0_FAN_RT	51 64
I150	TRUE	SMC_FAN_1_CTL	45 51
I149	TRUE	SMC_FAN_1_TACH	45 51

LPC+ Debug Connector

FUNC_TEST

I20	TRUE	=PP3V42_G3H_LPCPLUS	47 64
I19	TRUE	=PP5V_S0_LPCPLUS	47 64
I18	TRUE	LPC_AD<0>	21 45 47 53
I17	TRUE	LPC_AD<1>	21 45 47 53
I71	TRUE	LPC_FRAME_L	21 45 47 53
I72	TRUE	PM_CLKRUN_L	23 38 45 47 53
I73	TRUE	BOOT_LPC_SPI_L	22 45 47
I74	TRUE	SMC_TMS	45 46 47
I75	TRUE	DEBUG_RST_L	26 47
I76	TRUE	SMC_TRST_L	45 47
I77	TRUE	SMC_TDO	45 46 47
I78	TRUE	SMC_MD1	45 47
I79	TRUE	SMC_TX_L	45 46 47
I80	TRUE	FWH_INIT_L	6 21 47
I81	TRUE	PCI_CLK_PORT80_LPC	33 47
I82	TRUE	LPC_AD<2>	21 45 47 53
I83	TRUE	LPC_AD<3>	21 45 47 53
I84	TRUE	INT_SERIRQ	23 45 47 53
I85	TRUE	PM_SUS_STAT_L	23 45 46 47 53
I86	TRUE	SMC_TDI	45 46 47
I87	TRUE	SMC_TCK	45 46 47
I88	TRUE	SMC_RST_L	45 46 47
I89	TRUE	SMC_NMI	45 47
I91	TRUE	SMC_RX_L	45 46 47
I90	TRUE	SV_SET_UP	23 47

Other Func Test Points

FUNC_TEST

I92	TRUE	=PP1V05_S0_REG	62 64

SMBus FUNC_TEST

I182

	TRUE	SMBUS_SMC_MLB_SCL	27
I152	TRUE	SMBUS_SMC_MLB_SDA	27

FIREWIRE FUNC_TEST

I192	TRUE	PPFW_SWITCH	39

SLEEP LED FUNC_TEST

I155	TRUE	SYS_LED_ANODE	35 46

SMC FUNC_TEST

I145	TRUE	SMC_LID	40 45 46 65
I146	TRUE	SMC_MANUAL_RST_L	46
I156	TRUE	SMC_CPU_VSENSE	45 48

Power Supply FUNC_TEST

I160	TRUE	ALL_SYS_PWRGD	26 45 63
I161	TRUE	PPVCORE_CPU_S0	64
I162	TRUE	PP1V05_S0	64
I140	TRUE	PP1V5_S0	64
I163	TRUE	PP1V8_S0	64
I165	TRUE	PP2V5_S0	64
I166	TRUE	PP3V3_S0	64
I167	TRUE	PP5V_S0	64
I168	TRUE	PP1V2_S3	64
I169	TRUE	PP1V8_S3	64
I170	TRUE	PP2V5_S3	64
I172	TRUE	PP3V3_S3	64
I171	TRUE	PP5V_S3	64
I177	TRUE	PP3V3_S5	64
I178	TRUE	PP5V_S5	64
I176	TRUE	PP3V42_G3H	64
I174	TRUE	PPBUSA_G3H	
I175	TRUE	PPBUSB_G3H	64
I179	TRUE	PP18V5_G3H	64
I181	TRUE	PP0V9_S0	64

Battery Digital Connector

FUNC_TEST

I1	TRUE	SMC_BS_ALRT_L	45 46 65
I3	TRUE	SMBUS_BATT_SCL_F	65
I4	TRUE	SMBUS_BATT_SDA_F	65
I2	TRUE	BATT_IN	
I177	TRUE	BATT_POS	65
I160	TRUE	BATT_NEG	65

Audio FUNC_TEST

I9	TRUE	PP5V_S0_AUDIO_PWR	
I11	TRUE	PP5V_S0_AUDIO	
I10	TRUE	GND_AUDIO_PWR	64
I21	TRUE	GND_AUDIO_CODEC	64
I22	TRUE	ACZ_SDATAIN<0>	21 54
I24	TRUE	ACZ_SDATAOUT	21 54
I23	TRUE	ACZ_BITCLK	21 54
I25	TRUE	ACZ_RST_L	21 54 57
I45	TRUE	ACZ_SYNC	21 54

Battery FUNC_TEST

I29	TRUE	SMC_BATT_ISET	45 66
I32	TRUE	SMC_BATT_CHG_EN	45 46 66
I31	TRUE	SMC_BC_ACOK	45 46 65 66
I33	TRUE	SMC_PS_ON	39 45 46 65
I36	TRUE	SMC_BATT_TRICKLE_EN_L	45 46 66
I38	TRUE	SYS_ONEWIRE	45 46 65

USB FUNC_TEST

I44	TRUE	TP_USBP_E	6
I47	TRUE	TP_USBN_E	6
I46	TRUE	TP_USBP_F	
I48	TRUE	TP_USBN_F	

DC-JACK FUNC_TEST

I57	TRUE	ACIN_ENABLE_GATE	65

Battery charger FUNC_TEST

I58	TRUE	PPVBAT_G3H_CHGR_OUT	66

INVERTER CONNECTOR FUNC_TEST

I60	TRUE	PPBUS_ALL_INV_CONN	67
I59	TRUE	INV_GND	67
I61	TRUE	PP5V_INV_F	67
I63	TRUE	INV_BKLIGHT_PWM_L	67

FUNC TEST 1 OF 2

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	5	108

WWW.AliSaler.Com

(EMI PAD FOR INVERTER GONNECTOR)

67 INVT_CHGND — 1 ZS0620 EMI-SPRING CLIP-SM-M42

NC — 1 ZS0621 SM (SPKR-MIC-CLIP-M42)

CHASSIS GND

BATTERY,AUDIO,DIP DIMM CONNECTOR CHASSIS GND

GND_CHASSIS_IO 6 — OMIT Z0606 5R2P3-7SQB 1

65 =GND_BATT_CHGND
56 =GND_CHASSIS_AUDIO_JACK
=GND_CHASSIS_AUDIO_SPKRCONN
57 =GND_CHASSIS_AUDIO_MIC
=GND_CHASSIS_AUDIO_SHIELD1
=GND_CHASSIS_AUDIO_SHIELD2
=GND_CHASSIS_AUDIO_SHIELD3
28 =GND_CHASSIS_DIPDIMM_LEFT

SATA,LVDS CONNECTOR CHASSIS GND

GND_CHASSIS_SATA 35 — OMIT Z0607 6P5R2P6-5P5B 1
VOLTAGE=0V MAKE_BASE=TRUE

67 =GND_CHASSIS_LVDS

C0607 0.1UF 10% 16V X5R 402
C0608 0.01uF 10% 16V CERM 402

DCIN CONNECTOR CHASSIS GND

GND_CHASSIS_DCIN — OMIT Z0602 5R2P3-7SQB 1
VOLTAGE=0V MAKE_BASE=TRUE

65 =GND_DCIN_CHGND
37 =GND_CHASSIS_RJ45
69 =GND_CHASSIS_TMDS_UPPER

C0630 0.1UF 10% 16V X5R 402

I/O CONNECTOR CHASSIS GND

GND_CHASSIS_IO 6 — OMIT Z0608 5P0R2P3-7BLB 1
VOLTAGE=0V MAKE_BASE=TRUE

39 =GND_CHASSIS_FW_DOWN
42 =GND_CHASSIS_USB

C0610 0.1UF 10% 16V X5R 402
C0611 0.01uF 10% 16V CERM 402

DIP DIMM CONNECTOR CHASSIS GND

GND_CHASSIS_CENTER — OMIT Z0610 5R2P3-7SQB 1
VOLTAGE=0V MAKE_BASE=TRUE

29 28 =GND_CHASSIS_DIPDIMM_CENTER

C0616 0.1UF 10% 16V X5R 402
C0617 0.01uF 10% 16V CERM 402

DIP DIMM CONNECTOR CHASSIS GND

GND_CHASSIS_RIGHT — OMIT Z0609 5R2P3-7SQB 1
VOLTAGE=0V MAKE_BASE=TRUE

29 =GND_CHASSIS_DIPDIMM_RIGHT

C0614 0.1UF 10% 16V X5R 402
C0615 0.01uF 10% 16V CERM 402

OMIT Z0601 5R2P3-7SQB
GND_CHASSIS_CPU 1

C0612 0.1UF 10% 16V X5R 402
C0613 0.01uF 10% 16V CERM 402

OMIT Z0611 5R2P3-7B
GND_CHASSIS_FANSCREW 1

C0618 0.1UF 10% 16V X5R 402
C0619 0.01uF 10% 16V CERM 402

DIGITAL GND SCREW HOLE OMIT

OMIT Z0603 STDOFF-4.5OD3.95H-1.1-3.7-TH1
NB_RIGHT_DOWN_SCREW 1
R0612 0 5% 1/16W MF-LF 402

OMIT Z0604 STDOFF-4.5OD3.95H-1.1-3.7-TH1
CPU_THERMAL_SCREW_UP 1
R0610 0 5% 1/16W MF-LF 402

OMIT Z0605 STDOFF-4.5OD3.95H-1.1-3.7-TH1
CPU_THERMAL_SCREW_DOWN 1
R0611 0 5% 1/16W MF-LF 402

OMIT Z0621 STDOFF-4.5OD3.95H-1.1-3.7-TH1
CPU_THERMAL_SCREW_RIGHT 1
R0621 0 5% 1/16W MF-LF 402

LVDS ALIASES

NO-CONNECT UNUSED LVDS INTERFACE PORTS

13	LVDS_B_CLK_N	LVDS_B_CLK_N_SPN	5
13	LVDS_B_CLK_P	LVDS_B_CLK_P_SPN	5
13	LVDS_B_DATA_N<0>	LVDS_B_DATA_N0_SPN	5
13	LVDS_B_DATA_N<1>	LVDS_B_DATA_N1_SPN	5
13	LVDS_B_DATA_N<2>	LVDS_B_DATA_N2_SPN	5
13	LVDS_B_DATA_P<0>	LVDS_B_DATA_P0_SPN	5
13	LVDS_B_DATA_P<1>	LVDS_B_DATA_P1_SPN	5
13	LVDS_B_DATA_P<2>	LVDS_B_DATA_P2_SPN	5

MAKE_BASE=TRUE

PCI_EXPRESS GRAPHICS ALIASES

NO-CONNECT UNUSED SDVO INTERFACE PORTS

13	PEG_D2R_N<0>	PEG_D2R_N0_SPN
13	PEG_D2R_N<2>	PEG_D2R_N2_SPN
13	PEG_D2R_N<3>	PEG_D2R_N3_SPN
13	PEG_D2R_N<4>	PEG_D2R_N4_SPN
13	PEG_D2R_N<5>	PEG_D2R_N5_SPN
13	PEG_D2R_N<6>	PEG_D2R_N6_SPN
13	PEG_D2R_N<7>	PEG_D2R_N7_SPN
13	PEG_D2R_N<8>	PEG_D2R_N8_SPN
13	PEG_D2R_N<9>	PEG_D2R_N9_SPN
13	PEG_D2R_N<10>	PEG_D2R_N10_SPN
13	PEG_D2R_N<11>	PEG_D2R_N11_SPN
13	PEG_D2R_N<12>	PEG_D2R_N12_SPN
13	PEG_D2R_N<13>	PEG_D2R_N13_SPN
13	PEG_D2R_N<14>	PEG_D2R_N14_SPN
13	PEG_D2R_N<15>	PEG_D2R_N15_SPN
13	PEG_D2R_P<0>	PEG_D2R_P0_SPN
13	PEG_D2R_P<2>	PEG_D2R_P2_SPN
13	PEG_D2R_P<3>	PEG_D2R_P3_SPN
13	PEG_D2R_P<4>	PEG_D2R_P4_SPN
13	PEG_D2R_P<5>	PEG_D2R_P5_SPN
13	PEG_D2R_P<6>	PEG_D2R_P6_SPN
13	PEG_D2R_P<7>	PEG_D2R_P7_SPN
13	PEG_D2R_P<8>	PEG_D2R_P8_SPN
13	PEG_D2R_P<9>	PEG_D2R_P9_SPN
13	PEG_D2R_P<10>	PEG_D2R_P10_SPN
13	PEG_D2R_P<11>	PEG_D2R_P11_SPN
13	PEG_D2R_P<12>	PEG_D2R_P12_SPN
13	PEG_D2R_P<13>	PEG_D2R_P13_SPN
13	PEG_D2R_P<14>	PEG_D2R_P14_SPN
13	PEG_D2R_P<15>	PEG_D2R_P15_SPN
13	PEG_R2D_C_N<4>	PEG_R2D_C_N4_SPN
13	PEG_R2D_C_N<5>	PEG_R2D_C_N5_SPN
13	PEG_R2D_C_N<6>	PEG_R2D_C_N6_SPN
13	PEG_R2D_C_N<7>	PEG_R2D_C_N7_SPN
13	PEG_R2D_C_N<8>	PEG_R2D_C_N8_SPN
13	PEG_R2D_C_N<9>	PEG_R2D_C_N9_SPN
13	PEG_R2D_C_N<10>	PEG_R2D_C_N10_SPN
13	PEG_R2D_C_N<11>	PEG_R2D_C_N11_SPN
13	PEG_R2D_C_N<12>	PEG_R2D_C_N12_SPN
13	PEG_R2D_C_N<13>	PEG_R2D_C_N13_SPN
13	PEG_R2D_C_N<14>	PEG_R2D_C_N14_SPN
13	PEG_R2D_C_N<15>	PEG_R2D_C_N15_SPN
13	PEG_R2D_C_P<4>	PEG_R2D_C_P4_SPN
13	PEG_R2D_C_P<5>	PEG_R2D_C_P5_SPN
13	PEG_R2D_C_P<6>	PEG_R2D_C_P6_SPN
13	PEG_R2D_C_P<7>	PEG_R2D_C_P7_SPN
13	PEG_R2D_C_P<8>	PEG_R2D_C_P8_SPN
13	PEG_R2D_C_P<9>	PEG_R2D_C_P9_SPN
13	PEG_R2D_C_P<10>	PEG_R2D_C_P10_SPN
13	PEG_R2D_C_P<11>	PEG_R2D_C_P11_SPN
13	PEG_R2D_C_P<12>	PEG_R2D_C_P12_SPN
13	PEG_R2D_C_P<13>	PEG_R2D_C_P13_SPN
13	PEG_R2D_C_P<14>	PEG_R2D_C_P14_SPN
13	PEG_R2D_C_P<15>	PEG_R2D_C_P15_SPN

MAKE_BASE=TRUE

GND_CHASSIS_IO1
VOLTAGE=0V MAKE_BASE=TRUE

69 =GND_CHASSIS_TMDS_DOWN
I393
39 =GND_CHASSIS_FW_UPPER

OMIT Z0612 STDOFF-4.2OD2.15H-1.2-TH
NC 1

OMIT Z0613 STDOFF-4.2OD2.15H-1.2-TH
NC 1

NB CFG ALIASES

NO-CONNECT UNUSED CFG INTERFACE PORTS

14	NB_CFG<3>	TP_NB_CFG3
14	NB_CFG<4>	TP_NB_CFG4
14	NB_CFG<6>	TP_NB_CFG6
14	NB_CFG<8>	TP_NB_CFG8
14	NB_CFG<10>	TP_NB_CFG10
14	NB_CFG<11>	TP_NB_CFG11
14	NB_CFG<12>	TP_NB_CFG12
14	NB_CFG<13>	TP_NB_CFG13
14	NB_CFG<14>	TP_NB_CFG14
14	NB_CFG<15>	TP_NB_CFG15
14	NB_CFG<17>	TP_NB_CFG17

MAKE_BASE=TRUE

SATA ALIASES

NO-CONNECT UNUSED SATA INTERFACE PORTS

21	SATA_A_D2R_N	SATA_A_D2R_N_SPN
21	SATA_A_D2R_P	SATA_A_D2R_P_SPN
21	SATA_A_R2D_C_N	SATA_A_R2D_C_N_SPN
21	SATA_A_R2D_C_P	SATA_A_R2D_C_P_SPN

MAKE_BASE=TRUE

PCI_EXP ALIASES

NO-CONNECT UNUSED PCI_EXP INTERFACE PORTS

22	PCIE_C_D2R_N	PCIE_C_D2R_N_SPN
22	PCIE_C_D2R_P	PCIE_C_D2R_P_SPN
22	PCIE_C_R2D_C_N	PCIE_C_R2D_C_N_SPN
22	PCIE_C_R2D_C_P	PCIE_C_R2D_C_P_SPN
22	PCIE_D_D2R_N	PCIE_D_D2R_N_SPN
22	PCIE_D_D2R_P	PCIE_D_D2R_P_SPN
22	PCIE_D_R2D_C_N	PCIE_D_R2D_C_N_SPN
22	PCIE_D_R2D_C_P	PCIE_D_R2D_C_P_SPN
22	PCIE_E_D2R_N	PCIE_E_D2R_N_SPN
22	PCIE_E_D2R_P	PCIE_E_D2R_P_SPN
22	PCIE_E_R2D_C_N	PCIE_E_R2D_C_N_SPN
22	PCIE_E_R2D_C_P	PCIE_E_R2D_C_P_SPN
22	PCIE_F_D2R_N	PCIE_F_D2R_N_SPN
22	PCIE_F_D2R_P	PCIE_F_D2R_P_SPN
22	PCIE_F_R2D_C_N	PCIE_F_R2D_C_N_SPN
22	PCIE_F_R2D_C_P	PCIE_F_R2D_C_P_SPN

MAKE_BASE=TRUE

CLOCK ALIASES

NO-CONNECT UNUSED CLOCK INTERFACE PORTS

32	CK410_SRC1_N	CK410_SRC1_N_SPN 5
32	CK410_SRC1_P	CK410_SRC1_P_SPN 5
32	CK410_SRC3_N	CK410_SRC3_N_SPN 5
32	CK410_SRC3_P	CK410_SRC3_P_SPN 5
32	CK410_SRC7_N	CK410_SRC7_N_SPN 5
32	CK410_SRC7_P	CK410_SRC7_P_SPN 5
32	CK410_SRC_CLKREQ1_L	CK410_SRC_CLKREQ1_L_SPN 5
32	CK410_SRC_CLKREQ3_L	CK410_SRC_CLKREQ3_L_SPN 5

MAKE_BASE=TRUE

SB ALIASES

NO-CONNECT UNUSED CLOCK INTERFACE PORTS

23	SUS_CLK_SB	SUS_CLK_SB_SPN

MAKE_BASE=TRUE

SO-DIMM ALIASES

NO-CONNECT UNUSED ADDRESS INTERFACE PORTS

28	MEM_A_A<15>	MEM_A_A15_SPN
28	MEM_A_A<14>	MEM_A_A14_SPN
29	MEM_B_A<15>	MEM_B_A15_SPN
29	MEM_B_A<14>	MEM_B_A14_SPN

MAKE_BASE=TRUE

Ethernet ALIASES

36	ENET_CTRL12	ENET_CTRL12_SPN
36	ENET_CTRL25	ENET_CTRL25_SPN

MAKE_BASE=TRUE

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
860-0722	4	THERMAL STANDOFF	Z0603,Z0604,Z0605,Z0621	STANDOFF
860-0723	1	STANDOFF WIRELESS	Z0612	STANDOFF
860-0749	1	STANDOFF W/THRU HOLES,WIRELESS	Z0613	STANDOFF

FIREWIRE ALIASES

NO-CONNECT UNUSED FIREWIRE INTERFACE PORTS

38	FW_B_TPBIAS	FW_B_TPBIAS_SPN	5
38	FW_B_TPA_P	FW_B_TPA_P_SPN	5
38	FW_B_TPA_N	FW_B_TPA_N_SPN	5
38	FW_B_TPB_P	FW_B_TPB_P_SPN	5
38	FW_B_TPB_N	FW_B_TPB_N_SPN	5
38	FW_C_TPBIAS	FW_C_TPBIAS_SPN	5
38	FW_C_TPA_P	FW_C_TPA_P_SPN	5
38	FW_C_TPA_N	FW_C_TPA_N_SPN	5
38	FW_C_TPB_P	FW_C_TPB_P_SPN	5
38	FW_C_TPB_N	FW_C_TPB_N_SPN	5

MAKE_BASE=TRUE

39 =FWPWR_PWRON — NC_FWPWR_PWRON
NO_TEST=TRUE MAKE_BASE=TRUE

USB PORT A = External USB2.0 Port

42 =USB2_EXTA_P — USB2_EXTA_P — USB_A_P 22
42 =USB2_EXTA_N — USB2_EXTA_N — USB_A_N 22
42 =EXTAUSB_OC_L — EXTAUSB_OC_L — USB_A_OC_L 22
MAKE_BASE=TRUE

USB PORT B = Trackpad(Geyser)

40 =USB2_GEYSER_P — USB2_GEYSER_P — USB_B_P 22
40 =USB2_GEYSER_N — USB2_GEYSER_N — USB_B_N 22
MAKE_BASE=TRUE

USB PORT C = External USB2.0 Port B

42 =USB2_EXTB_P — USB2_EXTB_P — USB_C_P 22
42 =USB2_EXTB_N — USB2_EXTB_N — USB_C_N 22
42 =EXTBUSB_OC_L — EXTBUSB_OC_L — USB_C_OC_L 22
MAKE_BASE=TRUE

USB PORT D = CAMERA

67 =USB2_CAMERA_P — USB2_CAMERA_P — USB_D_P 22
67 =USB2_CAMERA_N — USB2_CAMERA_N — USB_D_N 22
MAKE_BASE=TRUE

USB PORT "E" = Unused

5 TP_USBP_E — USB_E_P 22
MAKE_BASE=TRUE
5 TP_USBN_E — USB_E_N 22
MAKE_BASE=TRUE

USB PORT "F" = IR CONTROLLER

41 =USB2_IR_P — USB_IR_P — USB_F_P 22
41 =USB2_IR_N — USB_IR_N — USB_F_N 22
MAKE_BASE=TRUE

USB PORT "G" = BLUETOOTH

44 =USB2_BT_P — USB_BT_P — USB_G_P 22
44 =USB2_BT_N — USB_BT_N — USB_G_N 22
MAKE_BASE=TRUE

USB PORT "H" = PCI-E Mini Card

43 =USB2_AIRPORT_P — USB2_AIRPORT_P — USB_H_P 22
43 =USB2_AIRPORT_N — USB2_AIRPORT_N — USB_H_N 22
MAKE_BASE=TRUE

ANALOG SWITCH GPIO

69 =SB_GPIO22 — SB_GPIO22 — TP_SB_GPIO22 22
MAKE_BASE=TRUE

45 14 PM_EXTTS_L<0> — DIMM_OVERTEMP_L 28 29
MAKE_BASE=TRUE

47 21 5 FWH_INIT_L — SMC_CPU_INIT_3_3_L 45
MAKE_BASE=TRUE

SIGNAL ALIAS /RESET

SYNC_MASTER=ENET SYNC_DATE=08/19/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE — SHT 6 OF 108

WWW.AliSaler.Com

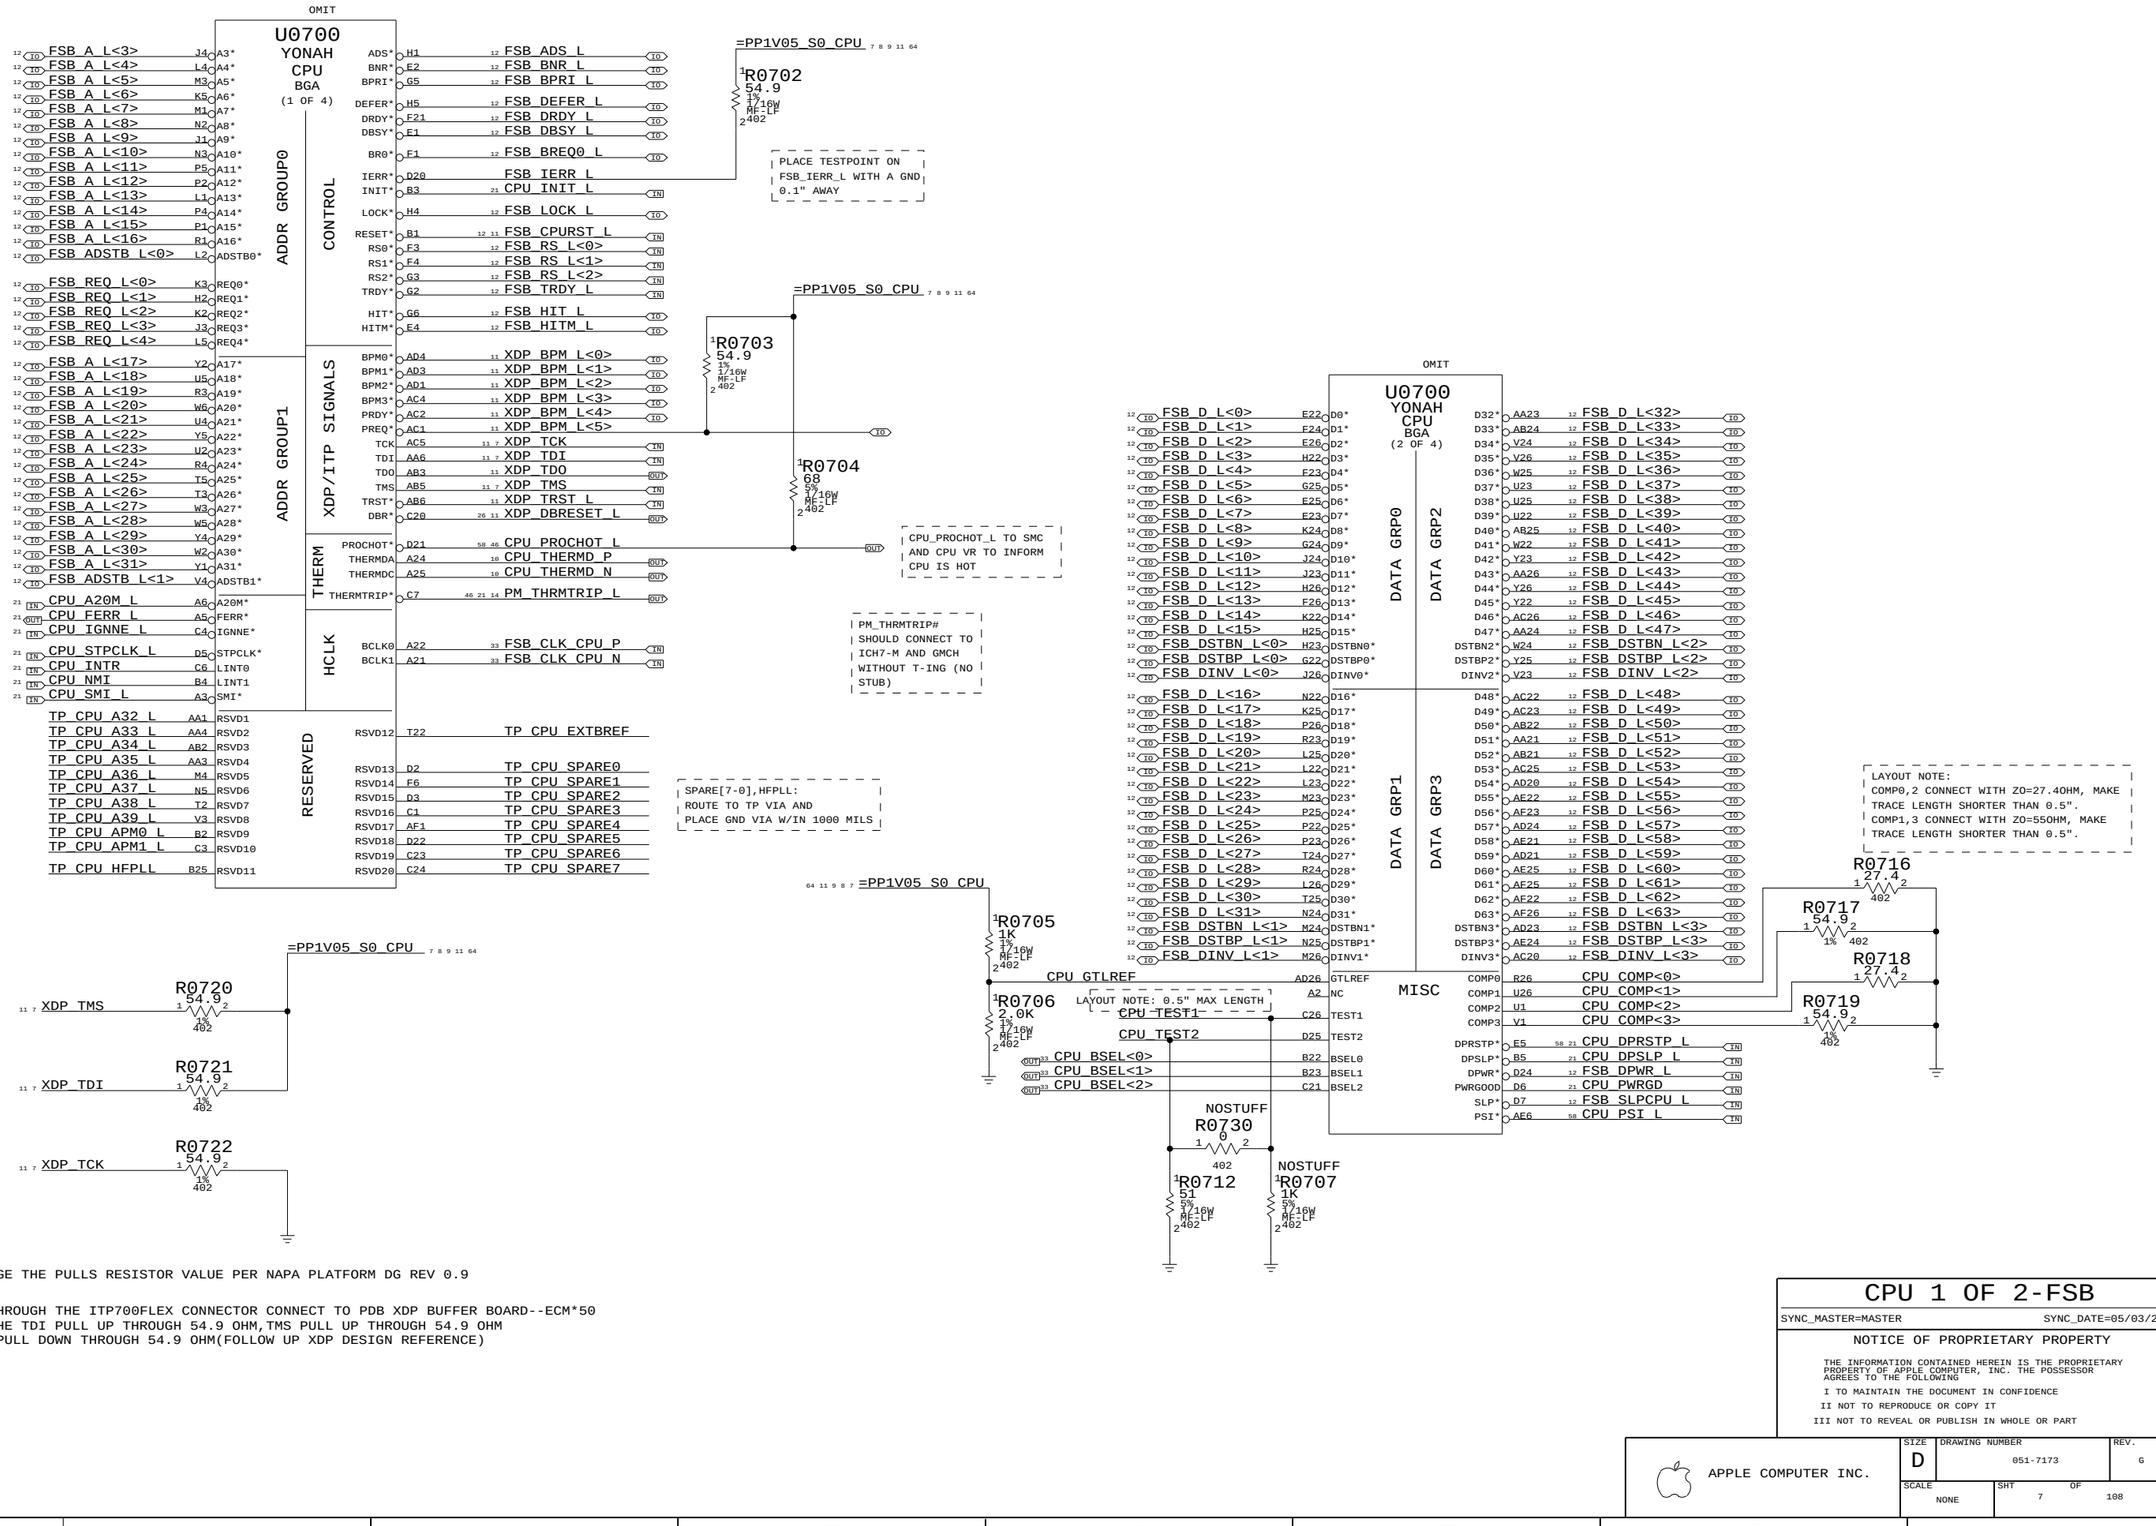

WWW.AliSaler.Com

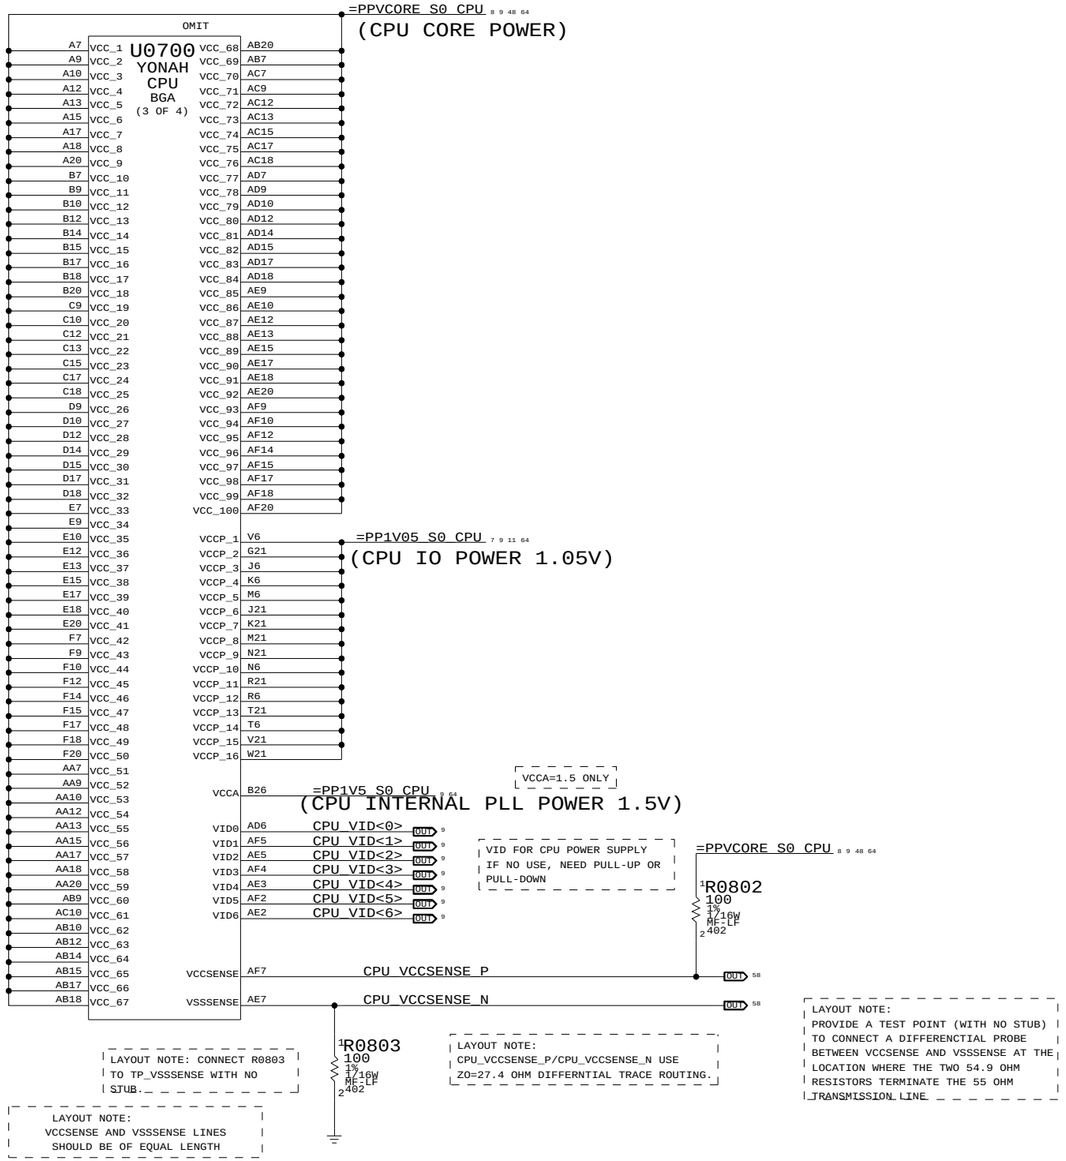

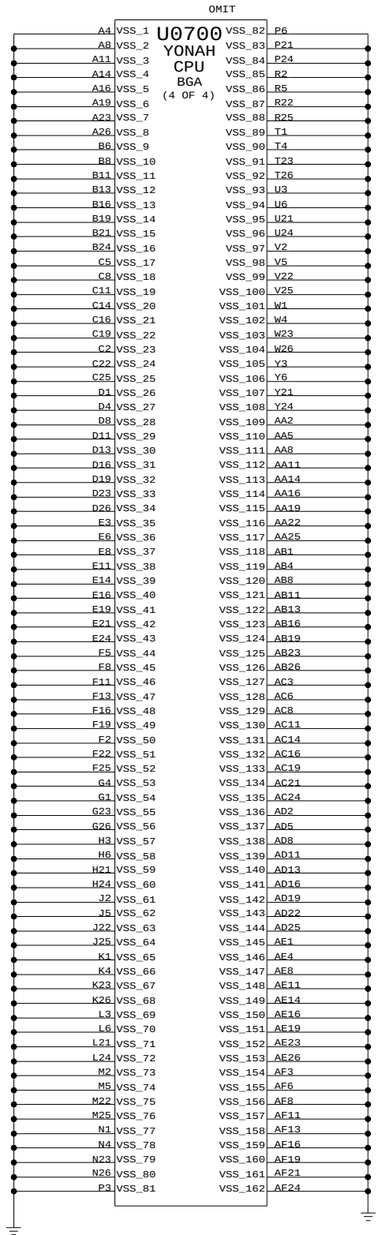

CPU 2 OF 2-PWR/GND

SYNC_MASTER=MASTER SYNC_DATE=05/03/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	8	108

WWW.AliSaler.Com

VCCA DECOUPLING
(CPU INTERNAL PLL POWER 1.5V)



PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
138S0603	138S0602	?	ALL	USE SAMSUNG AND MURATA ONLY
138S0606	138S0602	?	ALL	USE TAIYO

CPU CORE VID<> SETTINGS

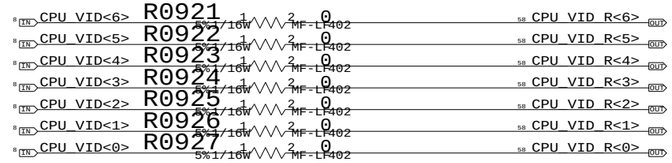
CPU_VID<6> R0921 0 5%1/16W MF-LF402 CPU_VID_R<6>
CPU_VID<5> R0922 0 5%1/16W MF-LF402 CPU_VID_R<5>
CPU_VID<4> R0923 0 5%1/16W MF-LF402 CPU_VID_R<4>
CPU_VID<3> R0924 0 5%1/16W MF-LF402 CPU_VID_R<3>
CPU_VID<2> R0925 0 5%1/16W MF-LF402 CPU_VID_R<2>
CPU_VID<1> R0926 0 5%1/16W MF-LF402 CPU_VID_R<1>
CPU_VID<0> R0927 0 5%1/16W MF-LF402 CPU_VID_R<0>

R0921~R0927 FOR CPU VOLTAGE MANUAL SETTING

VCCP CORE DECOUPLING
(CPU IO POWER 1.05V)

THIS 470UF FOR CPU,GMCH FSB BUS 1.05V

PLACE NEAR THE NORTH BRIDGE
ON BOTTOM SIDE



VCC CORE DECOUPLING
(CPU CORE POWER)

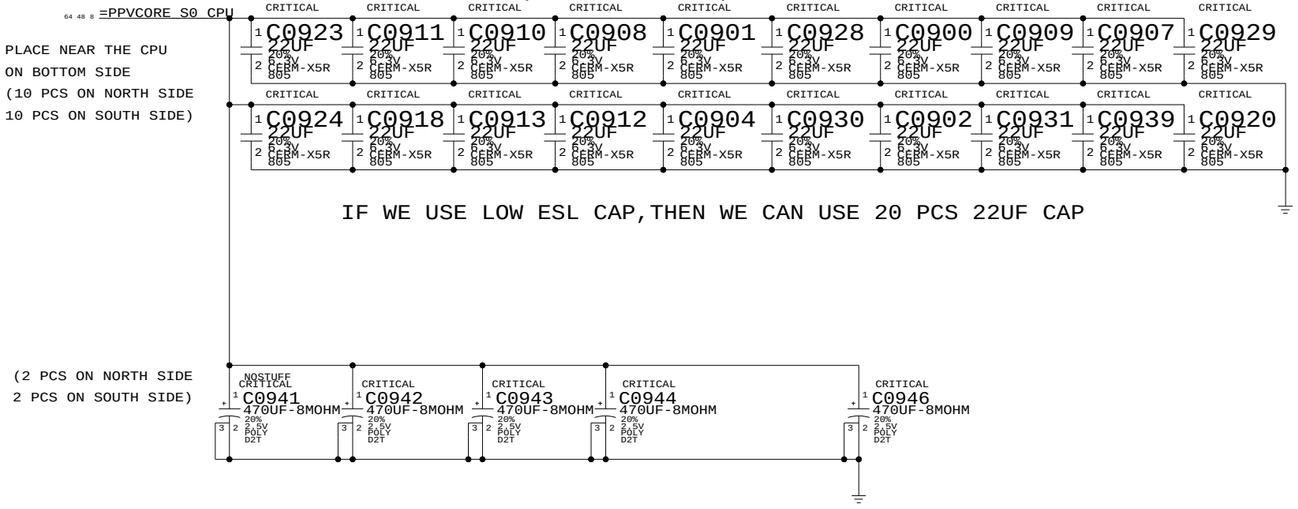

IF WE USE LOW ESL CAP,THEN WE CAN USE 20 PCS 22UF CAP

		MIN	TYP	MAX
DUAL CORE SV CPU	VCCHFM	1.1625		1.30
	VCCLFM	TBD		TBD
SINGLE CORE SV CPU	VCCHFM	1.1625		1.30
	VCCLFM		TBD	
DUAL CORE LV CPU	VCCHFM	1.0		1.1625
	VCCLFM		TBD	
ULV CPU	VCCHFM	TBD		TBD
	VCCLFM		TBD	

UNIT: V

ALL PROCESSOR DEFAULT VCORE FOR INITIAL POWER UP IS 1.2V
TWO PROCESSORS AT THE SAME FREQUENCY MAY HAVE DIFFERENT SETTING WITH THE VID RANGE(VCORE VOLTAGE)!
REFER TO YONAH PROCESSOR EMTS REV 1.0
VCCHFM: VCORE AT HIGHEST FREQUENCY MODE
VCCLFM: VCORE AT LOWEST FREQUENCY MODE

CPU DECAPS & VID<>

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 9 OF 108	

WWW.AliSaler.Com

CPU ZONE THERMAL SENSOR

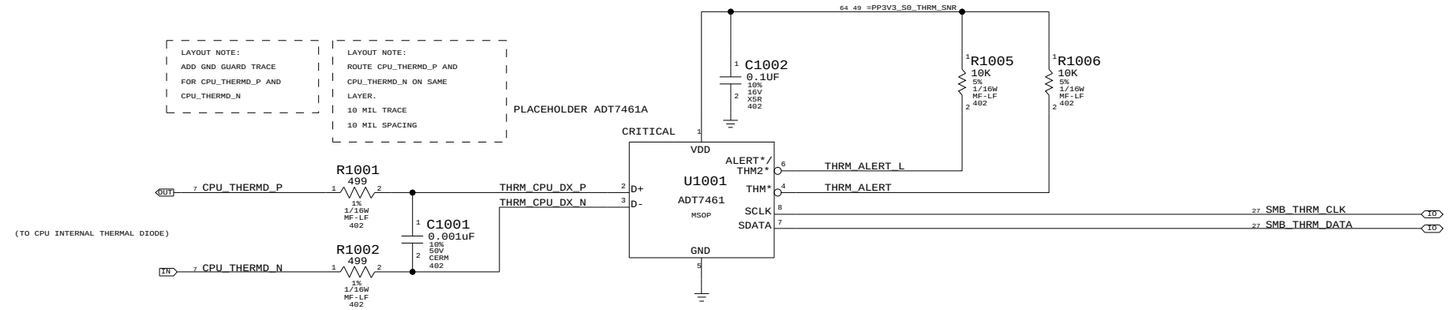

PLACE U1001 NEAR THE U1200

CPU MISC1-TEMP SENSOR

SYNC_MASTER=ENET SYNC_DATE=08/19/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	10	108

WWW.AliSaler.Com

CPU ITP700FLEX DEBUG SUPPORT

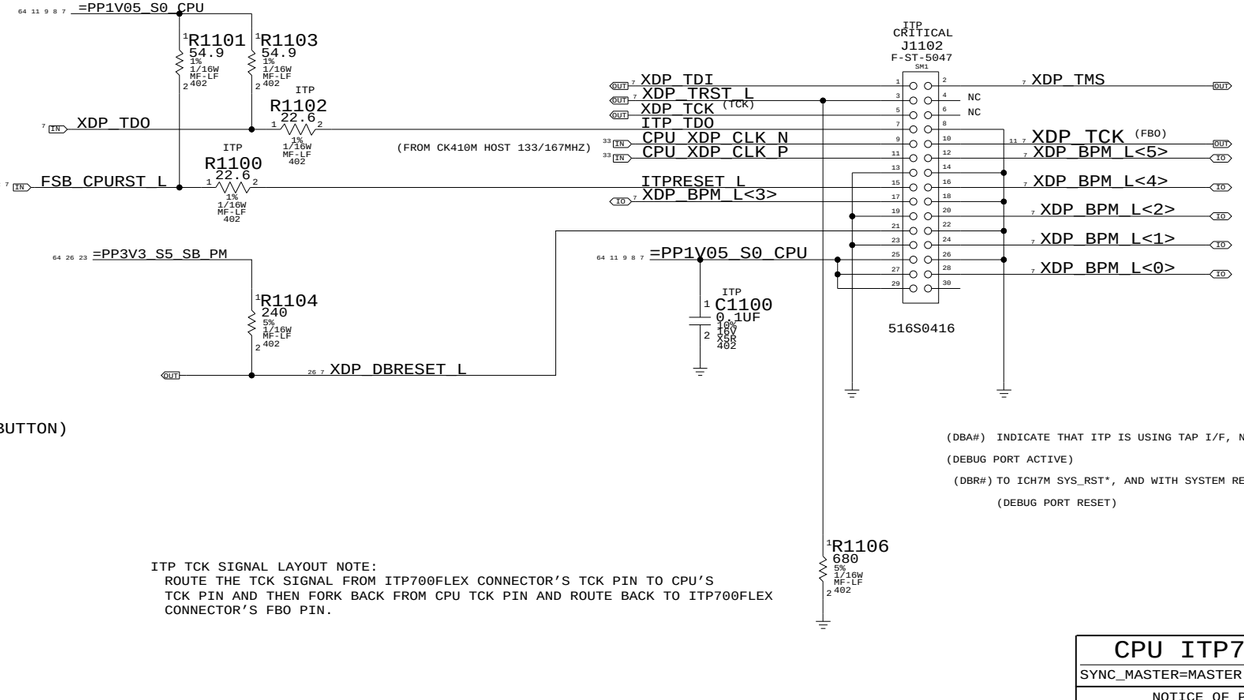

(DBA#) INDICATE THAT ITP IS USING TAP I/F, NC IN 945GM CHIPSET SYSTEM.

(DEBUG PORT ACTIVE)

(DBR#) TO ICH7M SYS_RST*, AND WITH SYSTEM RESET LOGIC

(DEBUG PORT RESET)

ITP TCK SIGNAL LAYOUT NOTE:
ROUTE THE TCK SIGNAL FROM ITP700FLEX CONNECTOR'S TCK PIN TO CPU'S TCK PIN AND THEN FORK BACK FROM CPU TCK PIN AND ROUTE BACK TO ITP700FLEX CONNECTOR'S FBO PIN.

CPU ITP700FLEX DEBUG

SYNC_MASTER=MASTER SYNC_DATE=5/23/05

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 11 OF 108	

WWW.AliSaler.Com

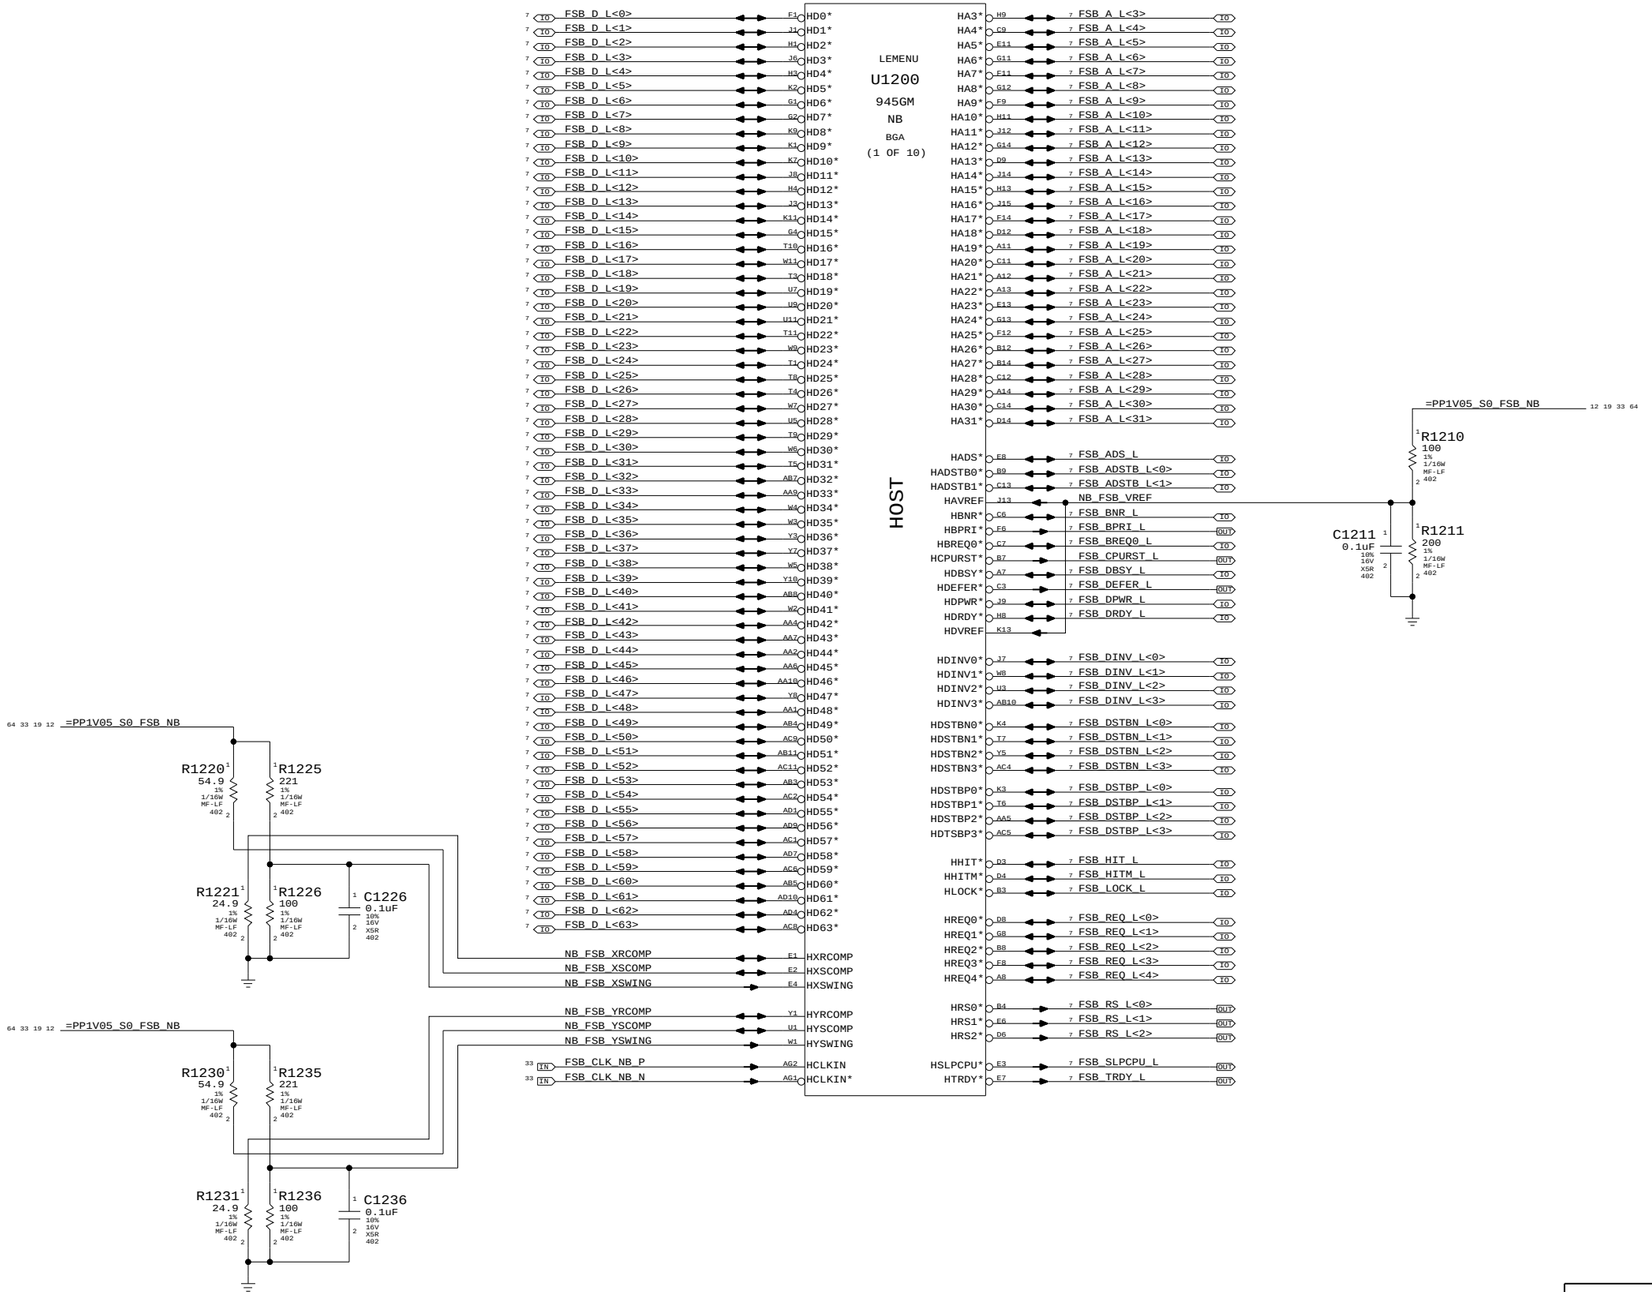

NB CPU Interface

SYNC_MASTER=NB SYNC_DATE=07/25/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 12 OF 108	

WWW.AliSaler.Com

LVDS Disable

Can leave all signals NC if LVDS is not implemented
Tie VCC_TXLVDS and VCCA_LVDS to GND. If SDVO is used
VCCD_LVDS must remain powered with proper decoupling.
Otherwise, tie VCCD_LVDS to GND also.

TV-Out Signal Usage:

Composite: DACA only
S-Video: DACB & DACC only
Component: DACA, DACB & DACC

Unused DAC outputs must remain powered, but can omit filtering components. Unused DAC outputs should connect to GND through 75-ohm resistors.

TV-Out Disable

Tie DACx_OUT, IRTNx, and IREF to 1.5V power rail.
Tie VCCD_TVDAC, VCCD_QTVDAC, VCCA_TVDACx, and
VCCA_TVBG to 1.5V power rail. Tie VSSA_TVBG to GND.

CRT Disable

Tie R/R#/G/G#/B/B# and IREF to VCC Core rail, tie
HSYNC and VSYNC to GND. Tie VCCA_CRTDAC to VCC Core
rail, and tie VSSA_CRTDAC and VCC_SYNC to GND.

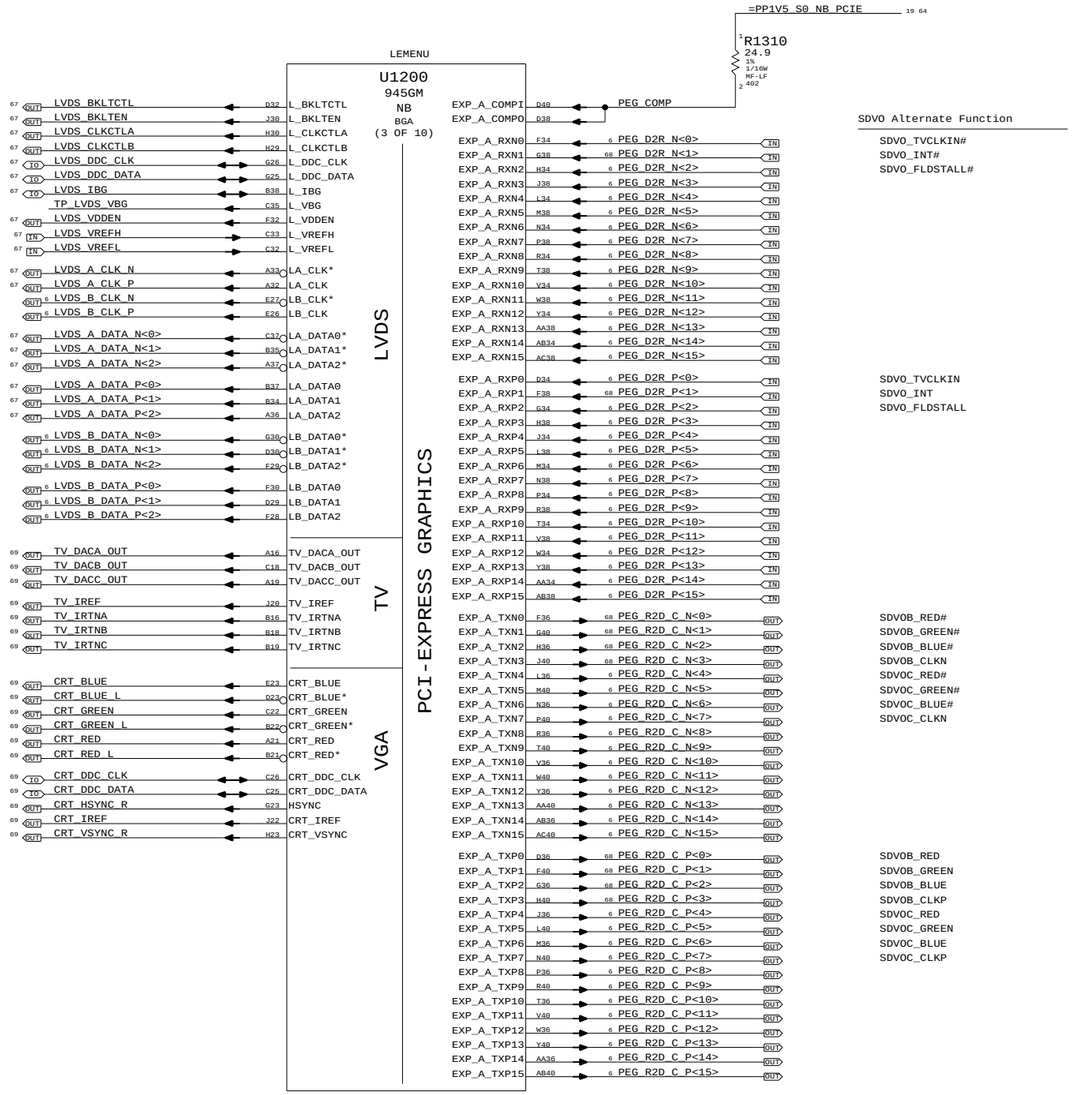

NB PEG / Video Interfaces

SYNC_MASTER=NB SYNC_DATE=07/25/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 13 OF 108	

WWW.AliSaler.Com

NB Misc Interfaces

SYNC_MASTER=NB SYNC_DATE=08/15/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	14	108

WWW.AliSaler.Com

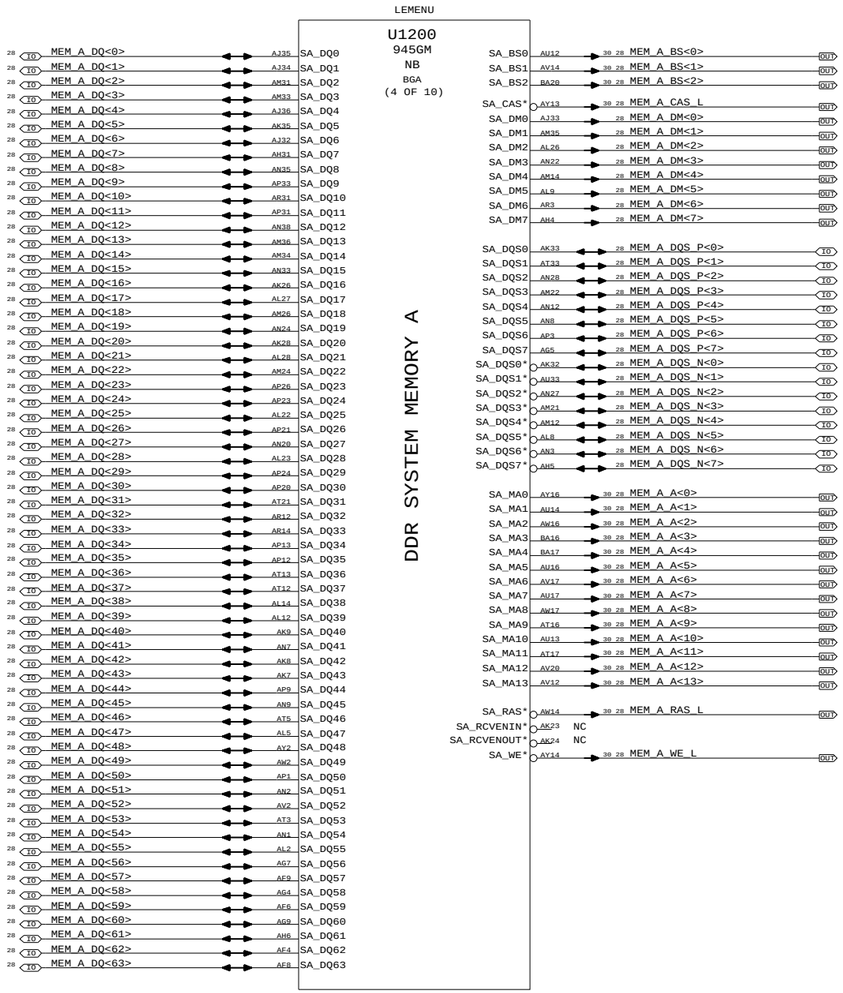

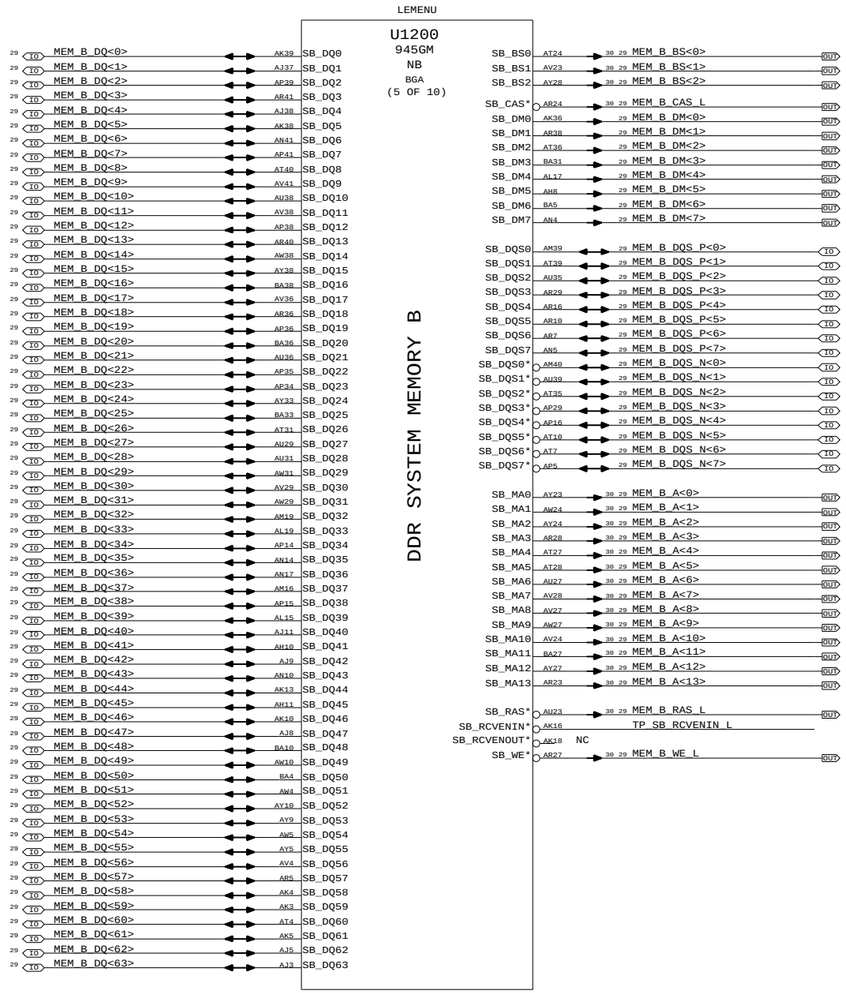

NB DDR2 Interfaces

SYNC_MASTER=NB SYNC_DATE=07/25/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	15	108

WWW.AliSaler.Com

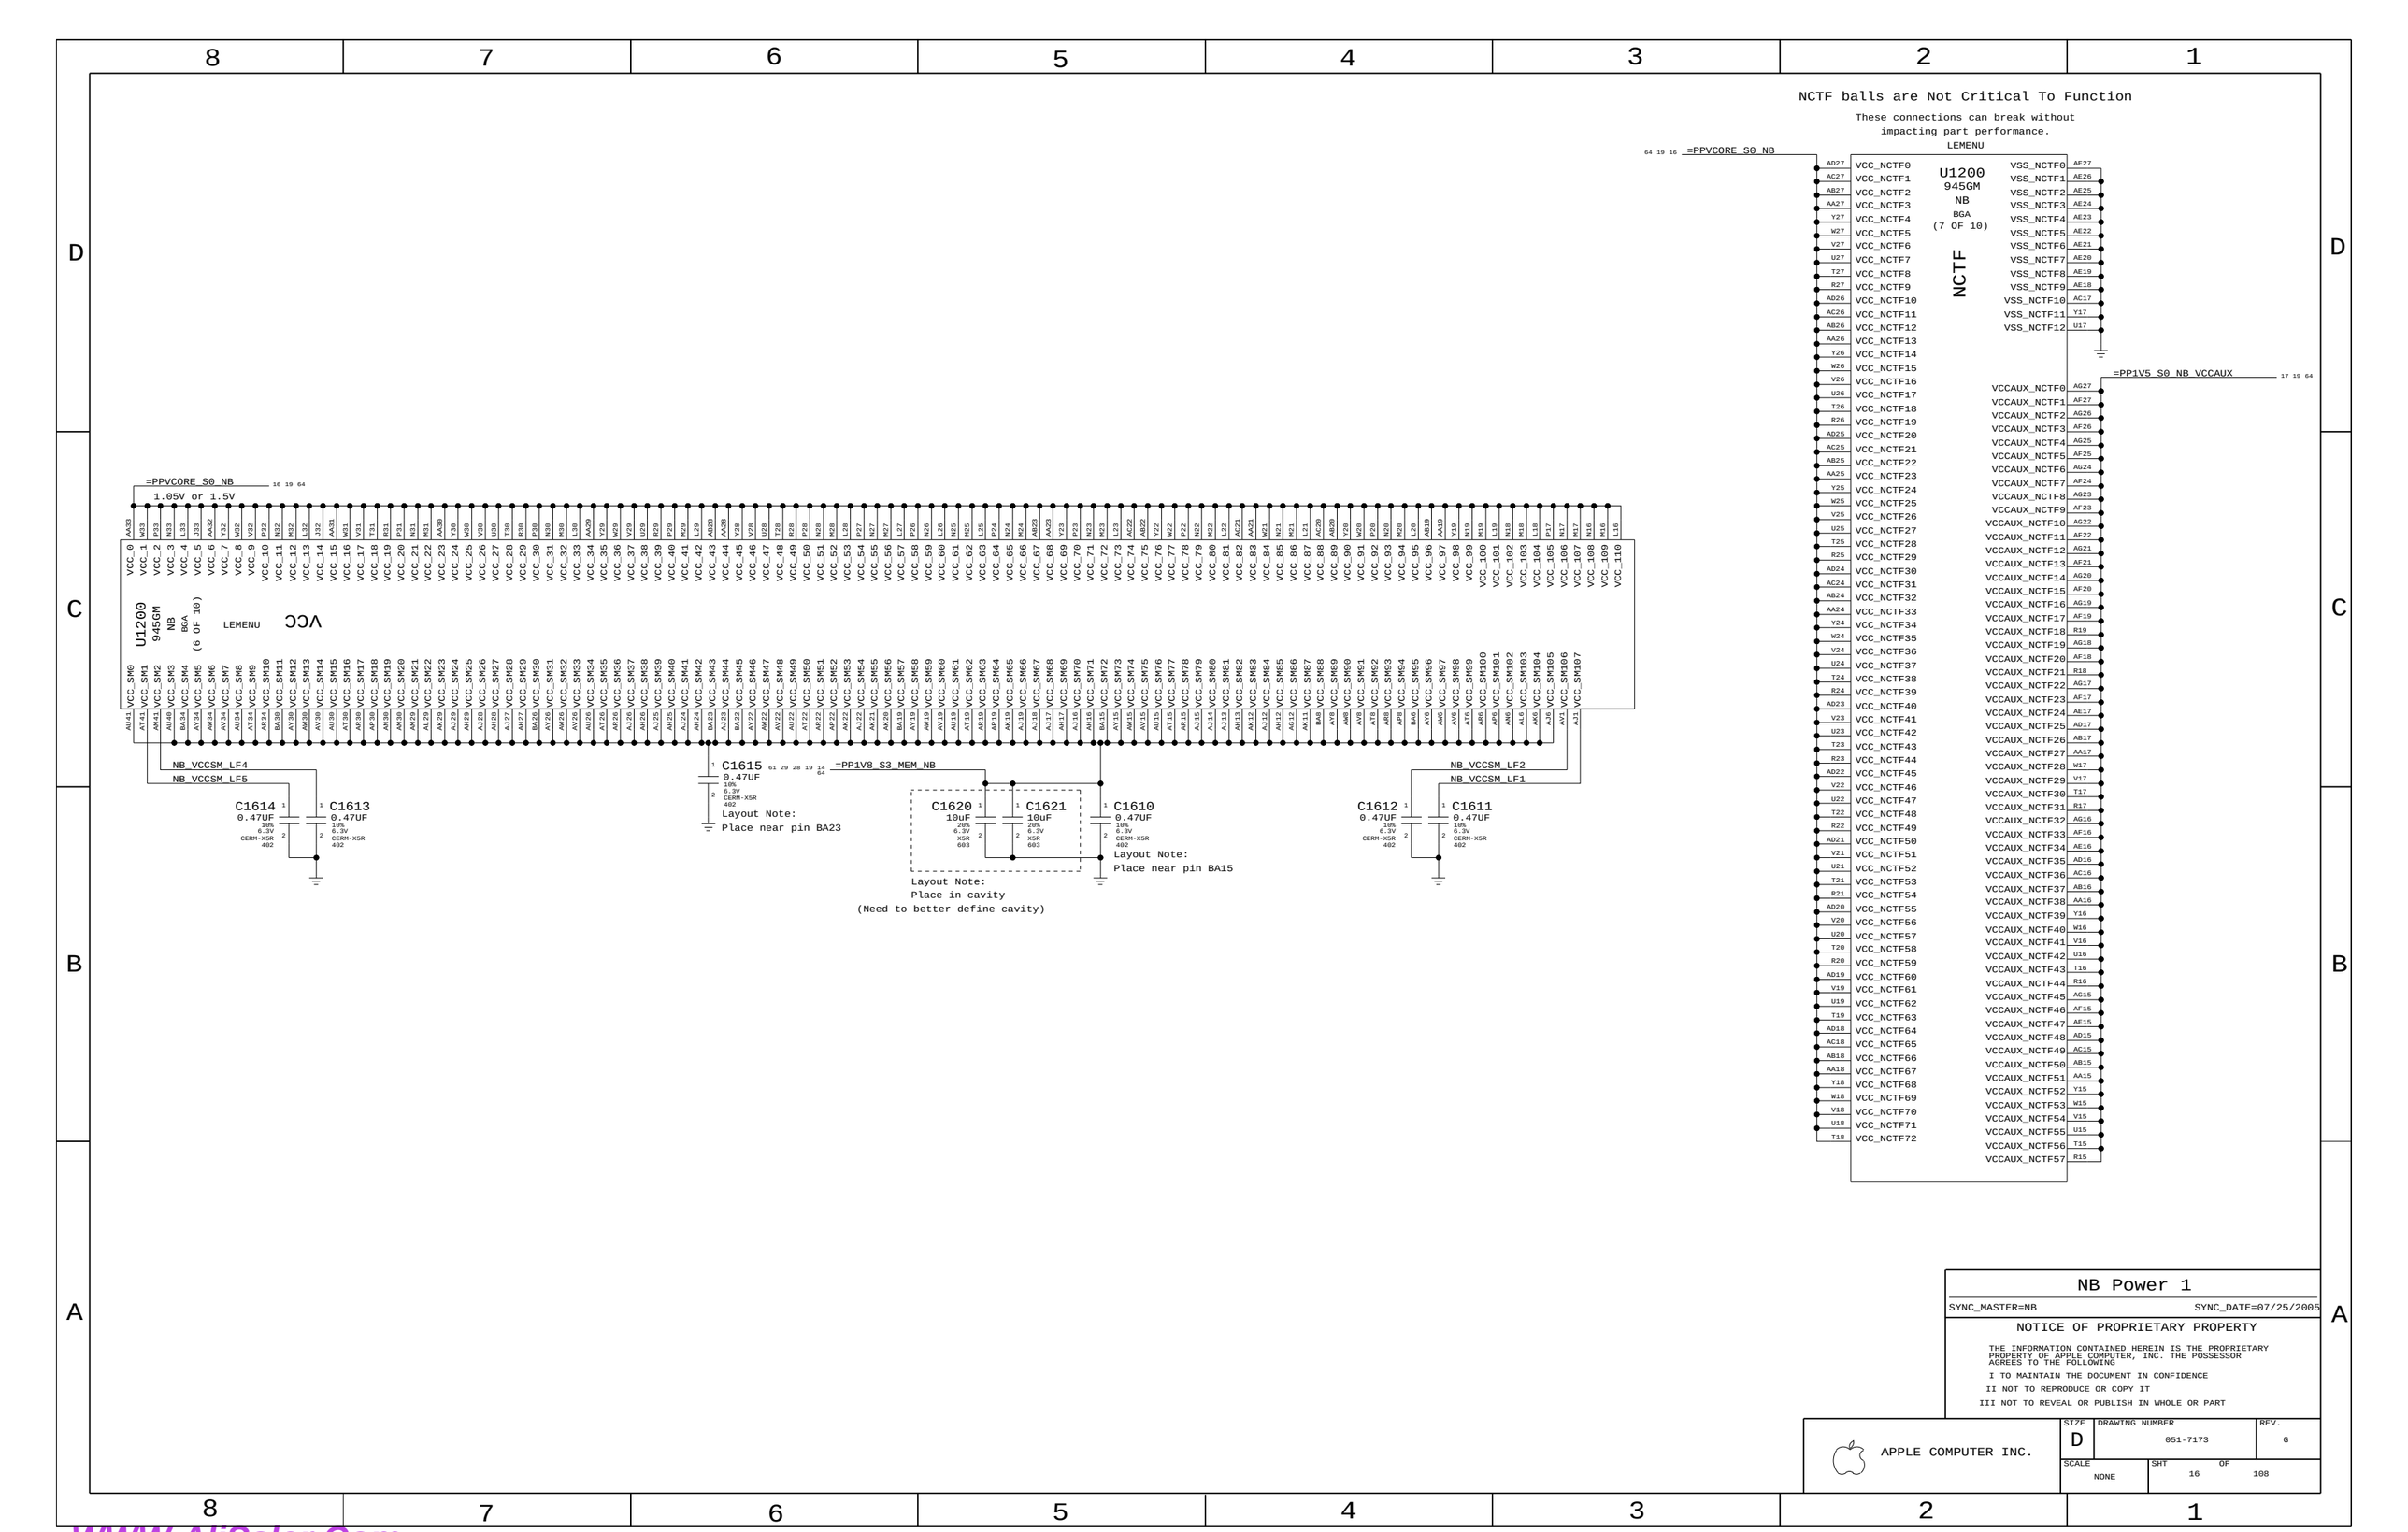

WWW.AliSaler.Com

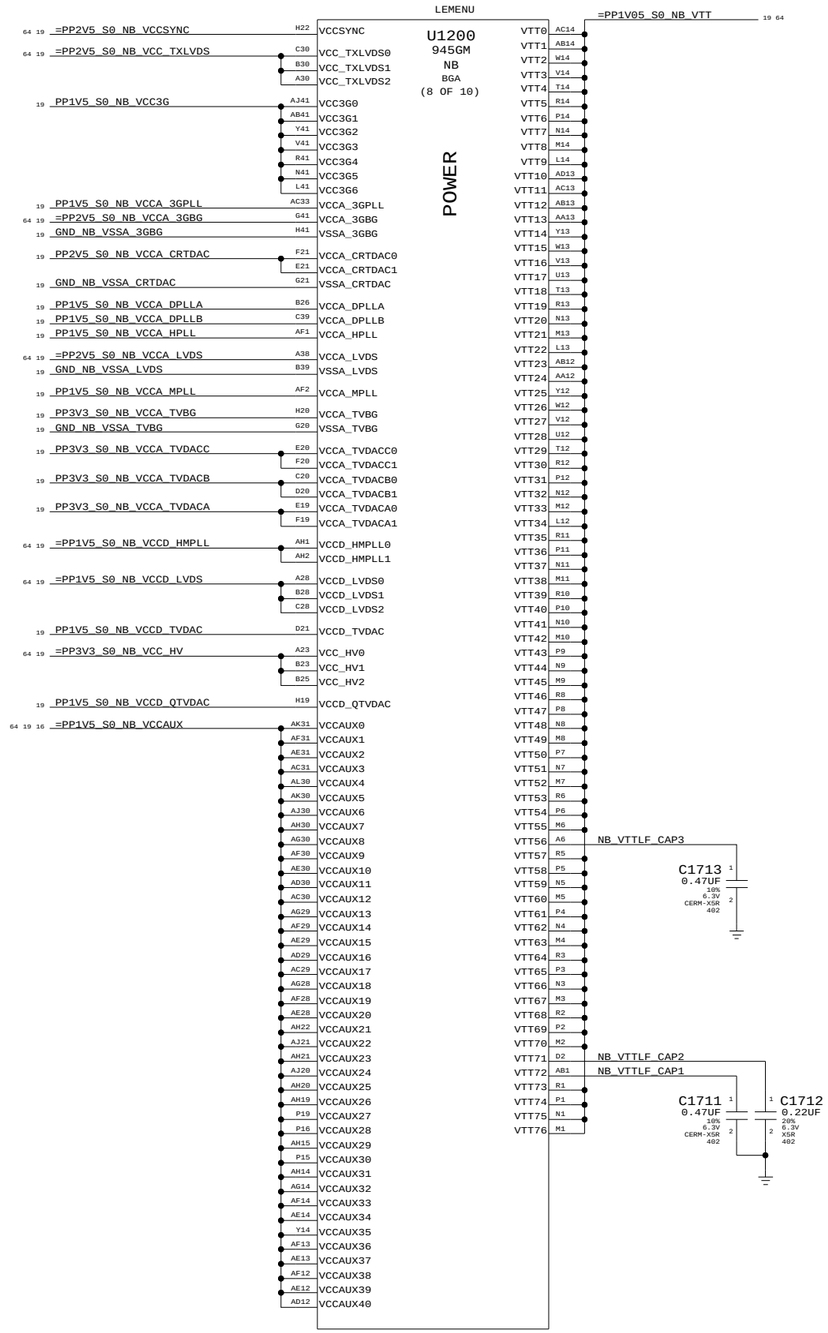

NB Power 2

SYNC_MASTER=NB SYNC_DATE=07/25/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	17	108

WWW.AliSaler.Com

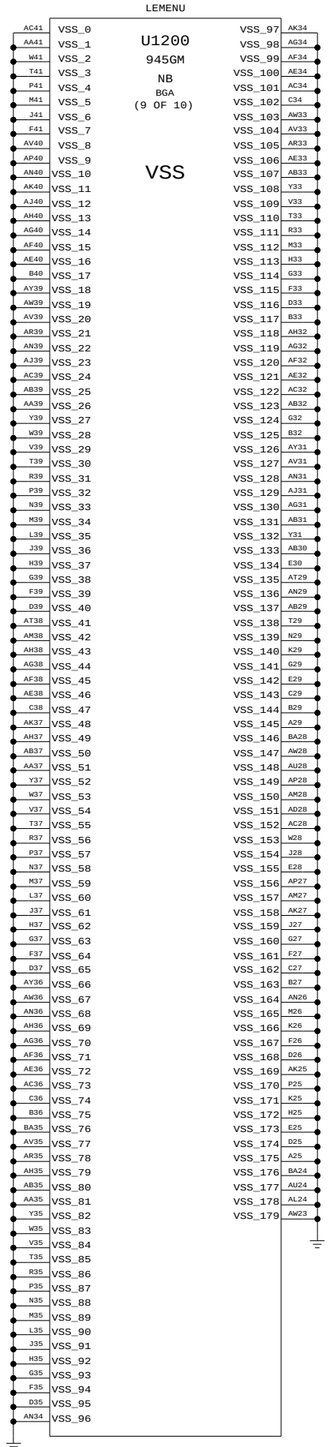

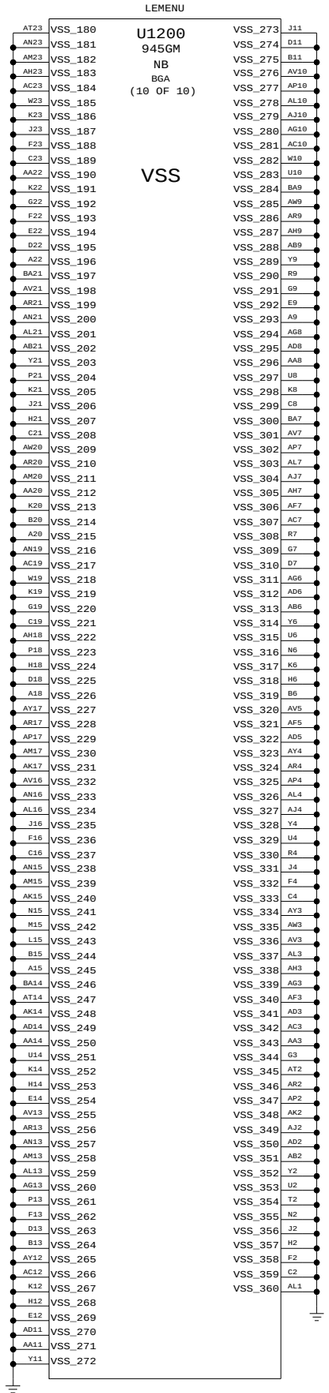

NB Grounds

SYNC_MASTER=NB SYNC_DATE=07/25/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT: 18 OF 108	

WWW.AliSaler.Com

Power Interface

These are the power signals that leave the NB "block"

IN =PP1V05_S0_FSB_NB 12 33 64
IN =PPVCORE_S0_NB 16 19 64
IN =PP1V05_S0_NB 19 64
IN =PP1V05_S0_NB_VTT 17 19 64
IN =PP1V5_S0_NB 19 64
IN =PP1V5_S0_NB_PCIE 13 64
IN =PP1V5_S0_NB_PLL 19 64
IN =PP1V5_S0_NB_TVDAC 19 64
IN =PP1V5_S0_NB_VCCD_HMPLL 17 64
IN =PP1V5_S0_NB_VCCD_LVDS 17 19 64
IN =PP1V5_S0_NB_VCCAUX 16 17 19 64
IN =PP1V8_S3_MEM_NB 14 16 28 29 61 64
IN =PP2V5_S0_NB_CRTDAC 19 64
IN =PP2V5_S0_NB_VCCSYNC 17 19 64
IN =PP2V5_S0_NB_VCC_TXLVDS 17 19 64
IN =PP2V5_S0_NB_VCCA_3GBG 17 19 64
IN =PP2V5_S0_NB_VCCA_LVDS 17 19 64
IN =PP3V3_S0_NB 14 20 64
IN =PP3V3_S0_NB_VCC_HV 17 19 64
IN =PP5V_S0_NB_TVDAC 19 64

MCH DISPLAY PLL POWER LDO

64 =PP2V5_S0_NB_DISP_PLL
CRITICAL
U1900
TPS73115
SOT23-5
IN OUT
EN NR/FB
GND
C1950 1UF 10% 6.3V CERM 402
C1951 0.01uF 10% 16V CERM 402
C1952 10uF 20% 6.3V X5R 603
PP1V5_S0_DPLL
TPS73115_NR

R1950 0 5% 1/16W MF-LF 402
MCH VCCA_DPLLA FILTER
(MCH DISPLAY A PLL 1.5V PWR)
PP1V5_S0_NB_VCCA_DPLLA 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1953 0.1uF 20% 10V CERM 402

R1951 0 5% 1/16W MF-LF 402
GMCH VCCA_DPLL_B FILTER
(MCH DISPLAY B PLL 1.5V PWR)
PP1V5_S0_NB_VCCA_DPLLB 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1954 0.1uF 20% 10V CERM 402

Layout Note:
THESE 4 0.1UF CAPS SHOULD
be within 5 mm of NB edge

MCH VCCA_LVDS FILTER

(MCH LVDS ANALOG 2.5V PWR)
=PP2V5_S0_NB_VCCA_LVDS 17 19 64
C1980 0.1uF 20% 10V CERM 402
C1981 0.01uF 10% 16V CERM 402
GND_NB_VSSA_LVDS 17

Layout Note:
This 0.1uF cap should
be within 5 mm of NB edge

Layout Note: Route to caps, then GND

64 19 =PP2V5_S0_NB_CRTDAC
R1985 10 1% 1/16W MF-LF 402
PP2V5_S0_NB_CRTDAC_FOLLOW
VOLTAGE=2.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
D1986 BAT54DW SOT-363
=PP1V05_S0_NB 19 64
L1985 180-OHM-1.5A 0603
PP2V5_S0_NB_CRTDAC_F
C1986 22000pF-1000mA 16V NFM18

MCH VCCA_CRTDAC BYPASS
(MCH CRTDAC ANALOG 2.5V PWR)
PP2V5_S0_NB_VCCA_CRTDAC 17
VOLTAGE=2.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1985 0.1uF 20% 10V CERM 402

Layout Note:
These 2 caps should be
within 6.35 mm of NB edge

GND_NB_VSSA_CRTDAC 17
Layout Note: Route to caps, then GND

GMCH CORE PWR 1.05V BYPASS

THIS 470UF FOR GMCH CORE 1.05V

64 19 16 =PPVCORE_S0_NB
CRITICAL
C1900 470UF 20% 2.5V TANT D2T
C1902 10uF 20% 6.3V X5R 603
C1903 10uF 20% 6.3V X5R 603
C1904 1UF 10% 6.3V CERM 402
C1905 0.22uF 20% 6.3V X5R 402
C1906 0.22uF 20% 6.3V X5R 402
C1907 0.22uF 20% 6.3V X5R 402

GMCH VCCD_LVDS BYPASS

(MCH LVDS DIGITAL 1.5V PWR)
64 19 17 =PP1V5_S0_NB_VCCD_LVDS
C1910 10uF 20% 6.3V X5R 603
C1911 0.1uF 20% 10V CERM 402

945 EDS: 5 mOhm, 1nH (1210?)

GMCH VCCTX_LVDS BYPASS

(MCH LVDS DATA/CLK TX 2.5V PWR)
64 19 17 =PP2V5_S0_NB_VCC_TXLVDS
C1912 4.7uF 20% 6.3V CERM 603
C1913 0.1uF 20% 10V CERM 402

945 EDS: 1210?

MCH VCC_HV BYPASS

(MCH HV BUFFER 3.3V PWR)
64 19 17 =PP3V3_S0_NB_VCC_HV
C1914 10uF 20% 6.3V X5R 603
C1915 0.1uF 20% 10V CERM 402

MCH VCCSYNC BYPASS

(MCH H/V SYNC 2.5V PWR)
64 19 17 =PP2V5_S0_NB_VCCSYNC
C1917 0.1uF 20% 10V CERM 402

MCH VCCA_3GBG BYPASS

(MCH PCIE/DMI BAND GAP 2.5V PWR)
64 19 17 =PP2V5_S0_NB_VCCA_3GBG
C1916 0.1uF 20% 10V CERM 402

GMCH VCCAUX FILTER

(MCH DDR DLL&IO, FSB HSIO&IO PWR 1.5V)
64 19 17 16 =PP1V5_S0_NB_VCCAUX
C1918 0.1uF 20% 10V CERM 402

MCH VTT BYPASS

(MCH FSB 1.05V PWR) (SHARE C0940 470UF)
64 19 17 =PP1V05_S0_NB_VTT
C1965 4.7uF 20% 6.3V CERM 603
C1966 2.2uF 20% 6.3V CERM1 603

Layout Note:
Place in cavity

C1967 0.22uF 20% 6.3V X5R 402

Layout Note:
Place on the edge

64 29 28 19 =PP1V8_S3_MEM

PLACE THOSE COMPONENT
CLOSE TO GMCH

R1988 1K 1% 1/16W MF-LF 402
MEM_VREF_NB_0 14
VOLTAGE=0.9V
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.25 mm
R1989 1K 1% 1/16W MF-LF 402

64 29 28 19 =PP1V8_S3_MEM
R1986 1K 1% 1/16W MF-LF 402
MEM_VREF_NB_1 14
VOLTAGE=0.9V
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.25 mm
R1987 1K 1% 1/16W MF-LF 402

64 19 =PP1V5_S0_NB_PLL
L1934 FERR-120-OHM-0.2A 0603
CRITICAL
C1934 22UF 20% 6.3V CERM-X5R 805
C1935 0.1uF 20% 10V CERM 402

GMCH VCCA_HPLL FILTER

(HOST PLL 1.5V PWR)
PP1V5_S0_NB_VCCA_HPLL 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm

L1936 FERR-120-OHM-0.2A 0603
CRITICAL
C1936 22UF 20% 6.3V CERM-X5R 805
C1937 0.1uF 20% 10V CERM 402

GMCH VCCA_MPLL FILTER

(MCH MEMORY PLL 1.5V PWR)
PP1V5_S0_NB_VCCA_MPLL 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm

CRITICAL
U1901
MM157
SOT23-5-LF
VIN VOUT
CONT NOISE
GND
MM1573DN_NR

64 19 =PP5V_S0_NB_TVDAC
C1940 1UF 10% 6.3V CERM 402
C1941 0.01uF 10% 16V CERM 402
C1942 1UF 10% 6.3V CERM 402
PP3V3_S0_NB_TVDAC

R1990 10 1% 1/16W MF-LF 402
PP3V3_S0_NB_TVDAC_FOLLOW
VOLTAGE=3.3V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
D1986 BAT54DW SOT-363
=PP1V5_S0_NB 19 64
L1990 180-OHM-1.5A 0603
PP3V3_S0_NB_TVDAC_F
C1990 10uF 20% 6.3V X5R 603
C1991 0.1uF 20% 10V CERM 402

MCH VCCA_TVDACC FILTER

(MCH TV OUT CHANNEL A 3.3V PWR)
C1992 22000pF-1000mA 16V NFM18
PP3V3_S0_NB_VCCA_TVDACA 17
VOLTAGE=3.3V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm

MCH VCCA_TVDACC FILTER

(MCH TV OUT CHANNEL B 3.3V PWR)
C1994 22000pF-1000mA 16V NFM18
PP3V3_S0_NB_VCCA_TVDACB 17
VOLTAGE=3.3V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1993 0.1uF 20% 10V CERM 402

Layout Note:
These 8 caps should be
within 6.35 mm of NB edge

MCH VCCA_TVDACC FILTER

(MCH TV OUT CHANNEL C 3.3V PWR)
C1996 22000pF-1000mA 16V NFM18
PP3V3_S0_NB_VCCA_TVDACC 17
VOLTAGE=3.3V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1995 0.1uF 20% 10V CERM 402

GMCH VCCD_TVDAC FILTER

(MCH TVDAC DEDICATED PWR 1.5V)
64 19 =PP1V5_S0_NB_TVDAC
C1921 22000pF-1000mA 16V NFM18
PP1V5_S0_NB_VCCD_TVDAC 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1920 0.1uF 20% 10V CERM 402

Layout Note:
These 4 caps should be
within 6.35 mm of NB edge

L1922 180-OHM-1.5A 0603
PP1V5_S0_NB_QTVDAC
C1923 22000pF-1000mA 16V NFM18

GMCH VCCD_QTVDAC FILTER

(MCH TVDAC DIGITAL QUIET 1.5V PWR)
PP1V5_S0_NB_VCCD_QTVDAC 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1922 0.1uF 20% 10V CERM 402

MCH VCCA_TVDACC FILTER

(MCH TV OUT CHANNEL D 3.3V PWR)
C1998 22000pF-1000mA 16V NFM18
PP3V3_S0_NB_VCCA_TVDACD 17
VOLTAGE=3.3V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1997 0.1uF 20% 10V CERM 402

GND_NB_VSSA_TVBG 17
Layout Note: Route to caps, then GND

MCH VCCA_TVBG FILTER

(MCH TV DAC BAND GAP 3.3V PWR)
PP3V3_S0_NB_VCCA_TVBG 17
VOLTAGE=3.3V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm

91NH, 20%, 20MOHM, 1.5A (1210 TYP)
CRITICAL
L1970 91nH 1210
64 =PP1V5_S0_NB_3G
C1970 220UF 20% 2.5V POLY SMB2

Layout Note:
Place L and C
close to MCH

GMCH VCC3G FILTER

(PCI-E/DMI ANALOG 1.5V PWR)
PP1V5_S0_NB_VCC3G 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1971 10uF 20% 6.3V X5R 603
C1972 10uF 20% 6.3V X5R 603

Layout Note:
10uF caps should
be close to MCH
on opposite side.

1uH, 20%
L1975 1.0UH-220MA-0.12-OHM 0805
64 =PP1V5_S0_NB_3GPLL
PP1V5_S0_NB_3GPLL_F
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
R1975 0.51 1% 1/16W MF-LF 402

GMCH VCCA_3GPLL FILTER

(3GIO PLL 1.5V PWR)
PP1V5_S0_NB_VCCA_3GPLL 17
VOLTAGE=1.5V
MIN_LINE_WIDTH=1.0 mm
MIN_NECK_WIDTH=1.0 mm
C1975 10uF 20% 6.3V X5R 603
C1976 0.1uF 20% 10V CERM 402

Layout Note:
3GPLL 10uF cap should
be placed in cavity

GND_NB_VSSA_3GBG 17
Layout Note: Route to caps, then GND

NB (GM) Decoupling

SYNC_MASTER=NB SYNC_DATE=06/22/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 19 OF 108	

WWW.AliSaler.Com

NB_CFG<3>	RESERVED

NB_CFG<4>	RESERVED

NB_CFG<5> DMI x2 Select	High = DMIx4 Low = DMIx2

14 NB_CFG<5>
Internal pull-up
NBCFG_DMI_X2
R2075 2.2K 5% 1/16W MF-LF 402

PROBABLY NOT NEEDED

NB_CFG<6>	RESERVED

NB_CFG<7> CPU Strap	High = Mobile CPU Low = RESERVED

14 NB_CFG<7>
Internal pull-up
NO STUFF
R2077 2.2K 5% 1/16W MF-LF 402

NB_CFG<8>	RESERVED

NB_CFG<9> PCIE Graphics Lane Reversal	High = Normal Low = Reversed

14 NB_CFG<9>
Internal pull-up
NBCFG_PEG_REVERSE
R2079 2.2K 5% 1/16W MF-LF 402

NB_CFG<10>	RESERVED

NB_CFG<11>	RESERVED

Internal pull-ups

NB_CFG<13:12>	00 = Partial Clock Gating Disable 01 = XOR Mode Enabled 10 = All-Z Mode Enabled 11 = Normal Operation

NB_CFG<14>	RESERVED

NB_CFG<15>	RESERVED

NB_CFG<16> FSB Dynamic ODT	High = Enabled Low = Disabled

14 NB_CFG<16>
Internal pull-up
NBCFG_DYN_ODT_DISABLE
R2085 2.2K 5% 1/16W MF-LF 402

NB_CFG<17>	RESERVED

NB_CFG<18> VCC Select	High = 1.5V Low = 1.05V

=PP3V3_S0_NB 14 19 20 64
NBCFG_VCC_1V5
R2058 2.2K 5% 1/16W MF-LF 402
14 NB_CFG<18>
Internal pull-down

NB_CFG<19> DMI Lane Reversal	High = Reversed Low = Normal

=PP3V3_S0_NB 14 19 20 64
NBCFG_DMI_REVERSE
R2059 2.2K 5% 1/16W MF-LF 402
14 NB_CFG<19>
Internal pull-down

945 External Design Spec says reserved

NB_CFG<20> PCIe Backward Interop. Mode	High = Both active Low = Only SDVO or PCIe x1

=PP3V3_S0_NB 14 19 20 64
NBCFG_SDVO_AND_PCIE
R2060 2.2K 5% 1/16W MF-LF 402
14 NB_CFG<20>
Internal pull-down

PROBABLY NOT NEEDED

NB Config Straps

SYNC_MASTER=NB SYNC_DATE=06/28/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	20	108

WWW.AliSaler.Com

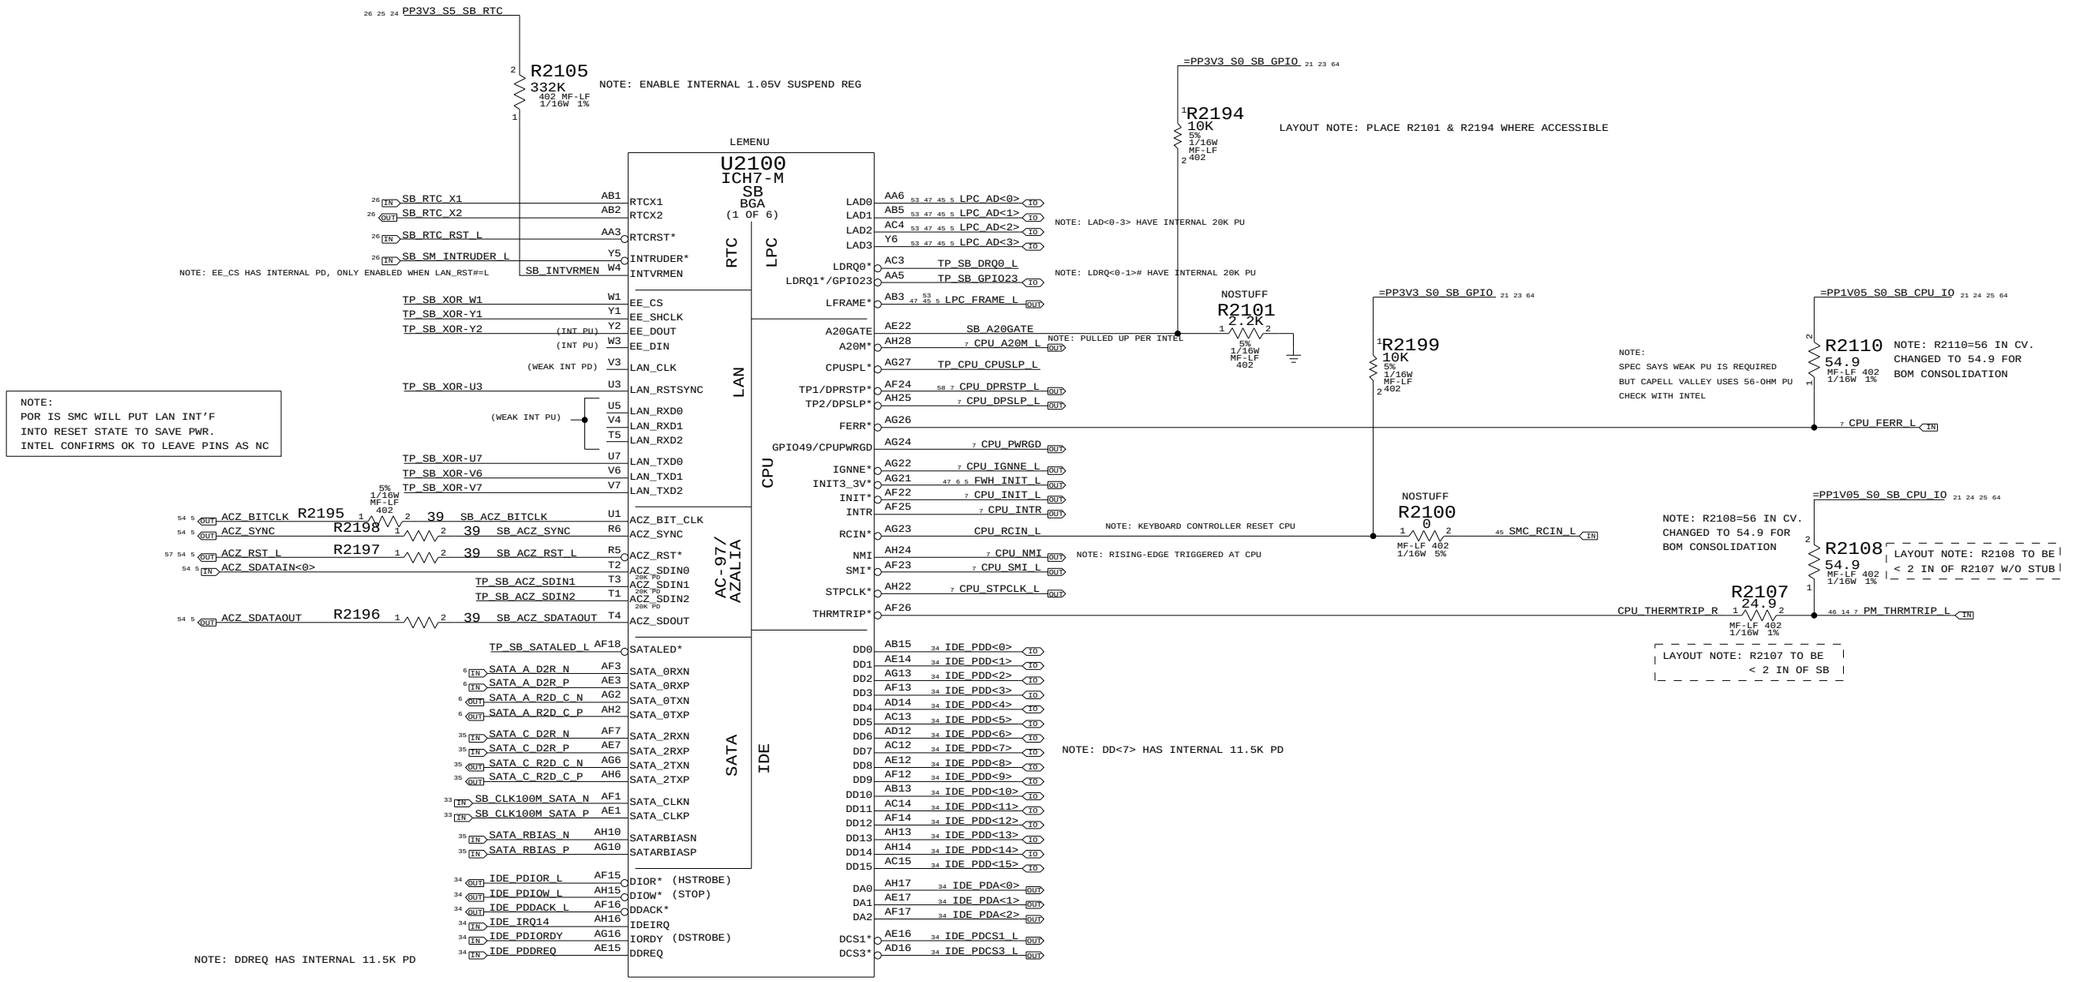

	AC '07	INTEL HIGH DEFINITION AUDIO
ACZ_BIT_CLK	INTERNAL 20K PD ENABLED WHEN - LSO BIT IN AC'97 GLOBAL CONTROL REG = 1; OR - BOTH FUNCTION 2 & 3 OF DEVICE 30 ARE DISABLED	INTERNAL 20K PD ONLY ENABLED IN S3COLD
ACZ_RST#		NONE
ACZ_SDIN[0-2]	INTERNAL 20K PD	INTERNAL 20K PD
ACZ_SDOUT	INTERNAL 20K PD ENABLED DURING RESET AND WHEN - LSO BIT IN AC'97 GLOBAL CONTROL REG = 1; OR - BOTH FUNCTION 2 & 3 OF DEVICE 30 ARE DISABLED	INTERNAL 20K PD ENABLED WHEN - LSO BIT IN AC'97 GLOBAL CONTROL REG = 1; OR - BOTH FUNCTION 2 & 3 OF DEVICE 30 ARE DISABLED
ACZ_SYNC		INTERNAL 20K PD

SB: 1 OF 4

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 21 OF 108	

WWW.AliSaler.Com

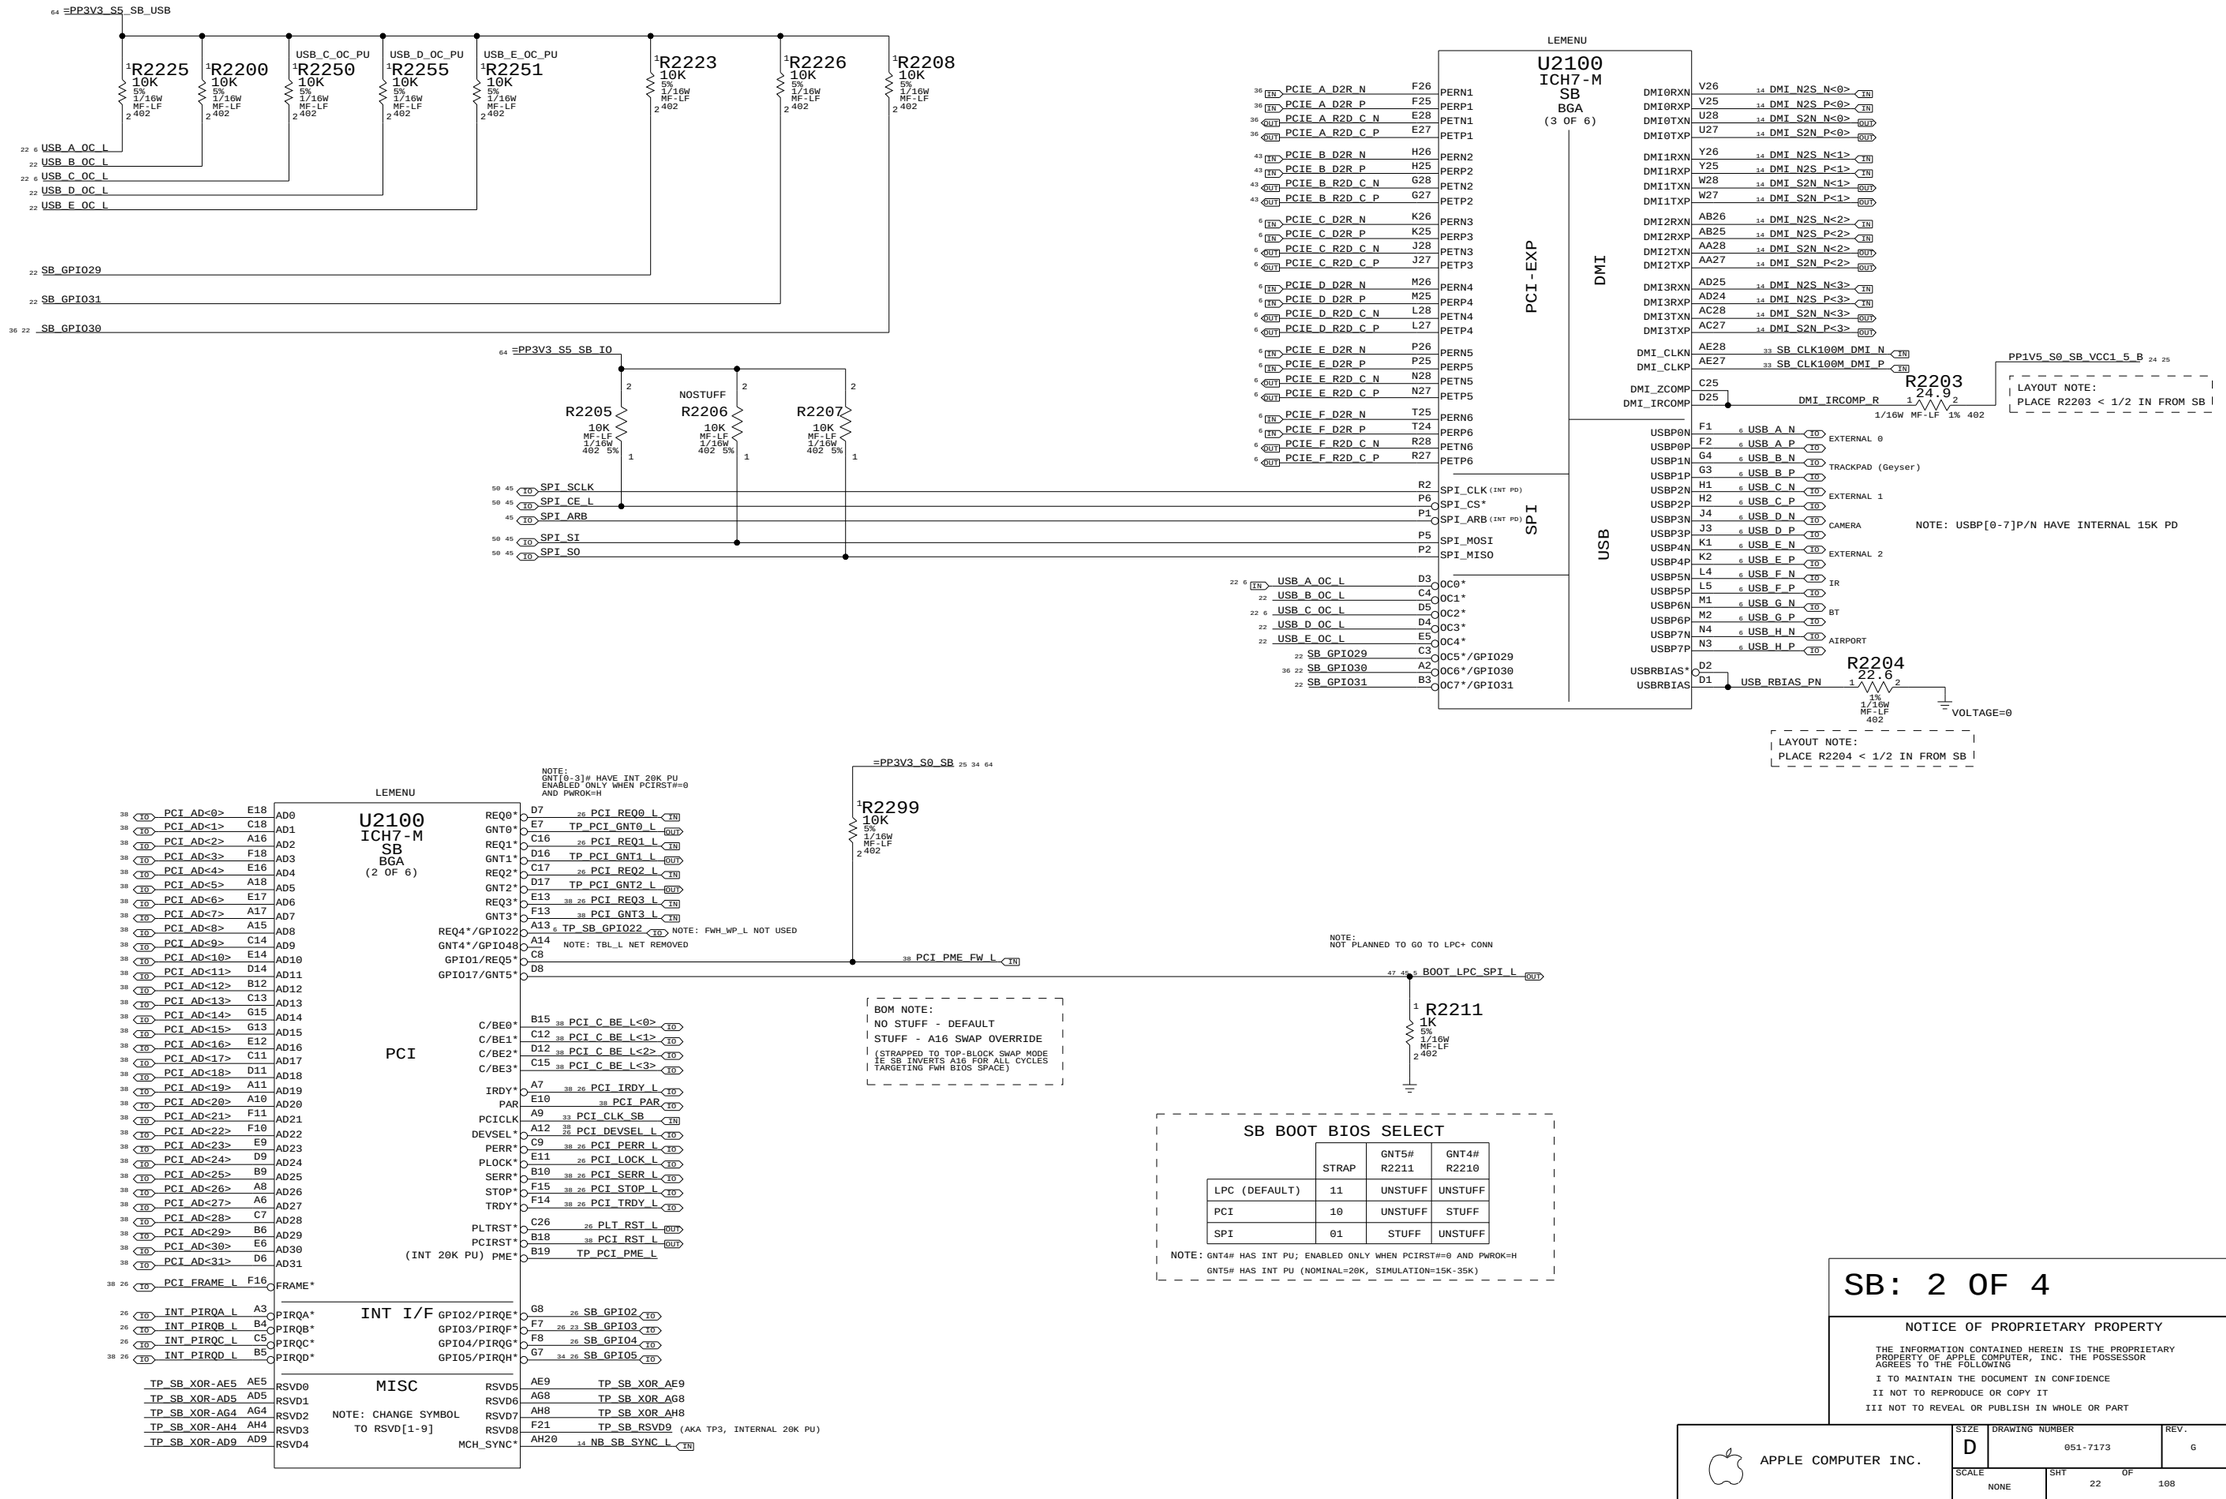

WWW.AliSaler.Com

NOTE FOR R2323 (DEF=NOSTUFF)
STRAPPING @ PWROK RISING:
SB WILL DISABLE TCO TIMER
SYSTEM REBOOT FEATURE

=PP3V3_S0_SB_GPIO 21 23 64

=PP3V3_S5_SB 23 25 64

64 25 23 =PP3V3_S5_SB

R2318 10K 1/16W 402 MF-LF 5%
R2395 8.2K 1/16W 402 MF-LF 5%
R2396 10K 1/16W 402 MF-LF 5%
R2397 8.2K 1/16W 402 MF-LF 5%
R2327 NOSTUFF 10K 1/16W 402 MF-LF 5%
R2326 NOSTUFF 10K 1/16W 402 MF-LF 5%
R2323 NO_REBOOT_MODE 1K 1/16W 402 MF-LF 5%

RP2300 10K 5% 1/16W SM-LF

R2398 1K 1/16W 402 MF-LF 5%
R2320 10K 1/16W 402 MF-LF 5%
R2317 10K 1/16W 402 MF-LF 5%
R2316 10K 1/16W 402 MF-LF 5%

R2300 0

LEMENU

U2100
ICH7-M
SB
BGA
(4 OF 6)

SMB

27 TO SMB_CLK	C22	SMBCLK
27 TO SMB_DATA	B22	SMBDATA
SMB_LINK_ALERT_L	A26	LINKALERT*
SMLINK<0>	B25	SMLINK0
SMLINK<1>	A25	SMLINK1
NOT USED		
PM_RI_L	A28	RI*
SB_SPKR	A19	SPKR (INT WEAK PD)
53 47 46 45 5 OUT PM_SUS_STAT_L	A27	SUS_STAT*
45 26 IN PM_SYSRST_L	A22	SYS_RST*
14 IN PM_BMBUSY_L	AB18	GPIO0/BM_BUSY*
SMB_ALERT_L NOTE: RESERVED FOR FUTURE	B23	GPIO11/SMBALERT*
32 OUT PM_STPPCI_L	AC20	GPIO18/STPPCI*
32 OUT PM_STPCPU_L	AF21	GPIO20/STPCPU*
IN SB_GPIO26	A21	GPIO26
23 BIOS_REC	B21	GPIO27
23 FWH_MFG_MODE	E23	GPIO28
53 47 45 38 5 TO PM_CLKRUN_L	AG18	GPIO32/CLKRUN*
RESERVED FOR MOBILE AZALIA DOCKING INT'F: TP_AZ_DOCK_EN_L	AC19	GPIO33/AZ_DOCK_EN*
TP_AZ_DOCK_RST_L	U2	GPIO34/AZ_DOCK_RST*
43 36 IN PCIE_WAKE_L	F20	WAKE*
53 47 45 5 TO INT_SERIRQ	AH21	SERIRQ
45 IN PM_THRM_L	AF20	THRM*
26 IN VR_PWRGD_CK410	AD22	VRMPWRGD
TO TP_SB_GPIO6	AC21	GPIO6
SB_RUNTIME_SCI_L	AC18	GPIO7
	E21	GPIO8

SYS GPIO

PWR MNGT

CLKS

	AC1	CLK14
	B2	CLK48
	C20	SUSCLK
B24		SLP_S3*
D23		SLP_S4*
F22		SLP_S5*
AA4		PWROK
AC22		GPIO16/DPRSLPVR
	C21	TP0/BATLOW*
(INT 20K PU)	C23	PWRBTN*
	C19	LAN_RST*
	Y4	RSMRST*

SATA GPIO

AF19	SB_GPIO21	GPIO21/SATA0GP
AH18	SB_GPIO19	GPIO19/SATA1GP
AH19		GPIO36/SATA2GP
AE19	SB_GPIO37	GPIO37/SATA3GP

R2302 100 1 2
R2303
R2305

35 SATA_C_DET_L IN

33 SB_CLK14P3M_TIMER IN
33 SB_CLK48M_USBCTLR IN
6 SUS_CLK_SB OUT

63 45 PM_SLP_S3_L OUT
63 61 60 45 PM_SLP_S4_L OUT
46 45 PM_SLP_S5_L OUT
26 PM_SB_PWROK IN
58 14 PM_DPRSLPVR OUT
NOTE: DPRSLPVR HAS INT 20K PD, ENABLED AT BOOT/RESET FOR STRAPPING FCN
45 PM_PWRBTN_L IN
45 PM_LAN_ENABLE IN
NOTE: SMC WILL DRIVE 0-1-0 TO KEEP LAN INT'F IN RESET STATE TO SAVE PWR

GPIO

	E20	GPIO9
	A20	GPIO10
DEF=GPI	F19	GPIO12
	E19	GPIO13
DEF=GPI	R4	GPIO14
	E22	GPIO15
	R3	GPIO24
	D20	GPIO25
OD	AD21	GPIO35
	AD20	GPIO38
DEF=GPI	AE20	GPIO39

46 45 SMS_INT_L IN
45 SMC_SB_NMI IN
23 PATA_PWR_EN_L OUT
23 SB_GPIO14 OUT
9 23 47 SV_SET_UP
23 CRB_SV_DET
TP_SB_GPIO25_DO_NOT_USE
32 SB_CLK100M_SATA_OE_L OUT
TO TP_SB_GPIO38
23 SATA_C_PWR_EN_L OUT

NOTE: PATA_DET IS ACTUALLY CABLE TYPE DETECT

NOTE FOR GPIO25:
- HAS INTERNAL 20K PU, ENABLED DURING RSMRST# AND DISABLED WITHIN 100MS AFTER RSMRST# DEASSERTS
- CAN NOT BE LOW FOR 35US AFTER RSMRST# ON BOOT (DMI AC COUPLING MODE STRAP)

=PP3V3_S5_SB_PM 11 26 64

R2319 10K 1/16W 402 MF-LF 5%
R2343 8.2K 5% 1/16W 402 MF-LF

45 PM_BATLOW_L IN

R2399 100K 5% 1/16W 402 MF-LF

45 PM_RSMRST_L IN

45 SMC_WAKE_SCI_L IN

45 SMC_RUNTIME_SCI_L IN
45 SMC_EXTSMI_L IN

64 25 23 =PP3V3_S5_SB

R2306 NOSTUFF 10K 1/16W 402 MF-LF 5%
R2308 10K 1/16W 402 MF-LF 5%
R2307 10K 1/16W 402 MF-LF 5%
R2309 NOSTUFF 0 1/16W 402 MF-LF 5%

SV_SET_UP 5 23 47
CRB_SV_DET 23

NOTE:
SV_SET_UP IS LINDACARD DETECT
HI = PRESENT
LO = NOT PRESENT

LAYOUT NOTE:
PLACE R2306-14 WHERE PHYSICALLY ACCESSIBLE

64 25 23 =PP3V3_S5_SB

R2313 10K 1/16W 402 MF-LF 5%
R2310 10K 1/16W 402 MF-LF 5%
R2314 NOSTUFF 0 1/16W 402 MF-LF 5%
R2311 NOSTUFF 10K 1/16W 402 MF-LF 5%

FWH_MFG_MODE 23
BIOS_REC 23

=PP3V3_S0_SB_GPIO 21 23 64

R2390 10K 5% 1/16W MF-LF 402
R2388 10K 5% 1/16W MF-LF 402

23 PATA_PWR_EN_L
23 SATA_C_PWR_EN_L

NOSTUFF R2312 0 5% 1/16W MF-LF 402
26 22 SB_GPIO3

IDE_RESET_L 34

R2315 0 5% 1/16W MF-LF 402
23 SB_GPIO14

R2389 15K 5% 1/10W MF-LF 402

R2312,R2315 and R2389 close to SB

SB: 3 OF 4

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 23 OF 108	

WWW.AliSaler.Com

LEMENU

U2100
ICH7-M
SB
BGA
(6 OF 6)

VSS

A4			AD3
A23			AD4
N24			AD7
P24			AD8
R18			AD15
U14			AD19
V27			AD23
AA24			AE2
AB27			AE4
AD11			AE8
B1			AE11
D10			AE13
F4			AE18
G18			AE21
J1			B8
L24			B11
M17			B14
N14			B17
N17			B20
N18			B26
N25			B28
N26			C2
P3			C6
P4			C27
P12			D13
P13			D18
P14			D21
P15			D24
P16			E1
P17			E2
P27			E4
P28			E8
R1			E15
R11			F3
R12			F5
R13			F12
R14			F27
R15			F28
R16			G1
R17			G2
T6			G5
T12			G6
T13			G9
T14			G14
T15			G21
T16			G24
T17			G25
U4			G26
U12			H3
U13			H4
U15			H5
U16			H24
U17			H27
U24			H28
U25			J2
U26			J5
V2			J24
V13			J25
V15			J26
V24			K24
V28			K27
W6			K28
W24			L13
W25			L15
W26			L25
Y3			L26
Y24			M3
Y27			M4
Y28			M5
AA1			M12
AA25			M13
AA26			M14
AB4			M15
AB6			M16
AB11			M24
AB14			M27
AB16			M28
AB19			N1
AB21			N2
AB24			N5
AB28			N6
AC2			N11
AC5			N12
AC9			N13
AC11			N15
AD1			N16
AE24			AG11
AE25			AG14
AF2			AG17
AF4			AG20
AF8			AG25
AF11			AH1
AF27			AH3
AF28			AH7
AG1			AH12
AG3			AH23
AG7			AH27

0 0

LEMENU

U2100
ICH7-M
SB
BGA
(5 OF 6)

25 PP5V_S0_SB_V5REF	G10		L11
	AD17	V5REF	L12
25 PP5V_S5_SB_V5REF_SUS	F6	V5REF_SUS	L14
			L16
25 22 PP1V5_S0_SB_VCC1_5_B	AA22		L17
	AA23		L18
	AB22		M11
	AB23		M18
	AC23		P11
	AC24		P18
	AC25		T11
	AC26		T18
	AD26		U11
	AD27		U18
	AD28		V11
	D26		V12
	D27		V14
	D28		V16
	E24		V17
	E25		V18
	E26		V5
	F23		V1
	F24		W2
	G22		W7
	G23		
	H22	VCCA3GP	
	H23	VCC1_5_B	
	J22		
	J23		
	K22		
	K23		
	L22		
	L23		
	M22		
	M23		
	N22		
	N23		
	P22		
	P23		
	R22		
	R23		
	R24		
	R25		
	R26		
	T22		
	T23		
	T26		
	T27		
	T28		
	U22		
	U23		
	V22		
	V23		
	W22		
	W23		
	Y22		
	Y23		
64 25 24 =PP3V3_S0_SB_VCC3_3	B27	VCC3_3	
25 PP1V5_S0_SB_VCCDMIPLL	AG28	VCCDMIPLL	
64 25 =PP1V5_S0_SB_VCC1_5_A_ARX	AB7		
	AC6		
	AC7	ARX	
	AD6	VCC1_5_A	
	AE6		
	AF5		
	AF6		
	AG5		
	AH5		
64 25 =PP1V5_S0_SB_VCCSATAPLL	AD2	VCCSATAPLL	
64 25 24 =PP3V3_S0_SB_VCC3_3	AH11	VCC3_3	
64 25 =PP1V5_S0_SB_VCC1_5_A_ATX	AB10		
	AB9		
	AC10		
	AD10	ATX	
	AE10	VCC1_5_A	
	AF10		
	AF9		
	AG9		
	AH9		
64 25 24 =PP3V3_S5_SB_VCCSUS3_3	E3	VCCSUS3_3	
64 25 =PP1V5_S0_SB_VCCUSBPLL	C1	VCCUSBPLL	
VOLTAGE GENERATED INTERNALLY SO NO CONNECT HERE	AA2	VCCLAN1_5	
	Y7	CHANGE SYMBOL TO 1.05	

CORE
VCC1_05

=PPVCORE_S0_SB 25 64

NOTE FOR VCCLAN_3_3:
S3 IF INTERNAL LAN IS USED
S0 OR S3 IF NOT

VCC_PAUX
VCCLAN_3_3

=PP3V3_S0_SB_VCCLAN3_3 25 64

VCC3_3/VCCHDA
VCCSUS3_3/VCCSUSHDA

U6 =PP3V3_S0_SB_3V3_1V5_VCCHDA 25 64
R7 =PP3V3_S5_SB_3V3_1V5_VCCSUSHDA 64

NOTE:
VCCHDA AND VCCSUSHDA CAN BE 1.5V OR 3.3V
DEPENDING ON VIO OF AZALIA INTERFACE
CODEC IC'S CONSIDERED SO FAR ARE 3.3V

V_CPU_IO

AE23 =PP1V05_S0_SB_CPU_IO 21 25 64
AE26
AH26

IDE
VCC3_3

AA7 =PP3V3_S0_SB_VCC3_3_IDE 25 64
AB12
AB20
AC16
AD13
AD18
AG12
AG15
AG19

PCI
VCC3_3

A5
B13
B16
B7
C10
D15
F9
G11
G12
G16 =PP3V3_S0_SB_VCC3_3_PCI 25 64

VCCRTC

W5 PP3V3_S5_SB_RTC 21 25 26

VCCSUS3_3

P7 =PP3V3_S5_SB_VCCSUS3_3 24 25 64
A24
C24
D19
D22
G19

USB
VCCSUS3_3

K3
K4
K5
K6
L1
L2
L3
L6
L7
M6
M7
N7 =PP3V3_S5_SB_VCCSUS3_3_USB 25 64

VCC1_5_A

AB17
AC17
T7
F17
G17 =PP1V5_S0_SB_VCC1_5_A 25 64
AB8
AC8

VCCSAUS1_5
CHANGE SYMBOL TO 1.05

K7
C28
G20

VOLTAGE GENERATED INTERNALLY
SO NO CONNECT HERE

USB CORE
VCC1_5_A

A1
H6
H7
J6
J7 =PP1V5_S0_SB_VCC1_5_A_USB_CORE 25 64

SB: 4 OF 4

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 24 OF 108	

WWW.AliSaler.Com

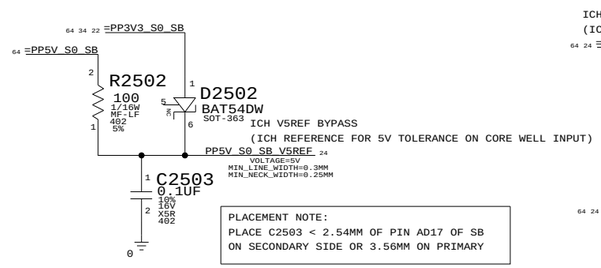

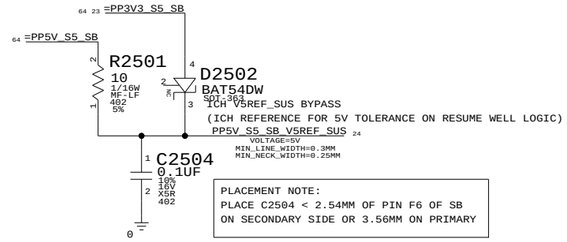

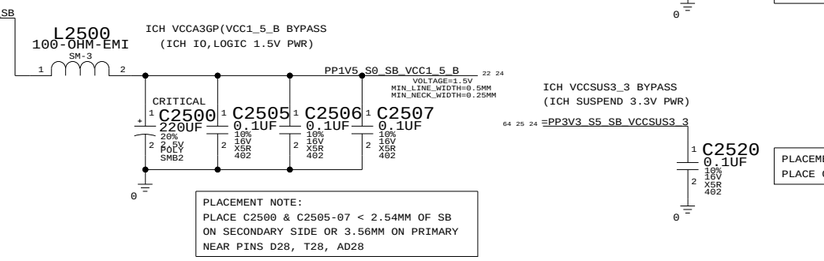

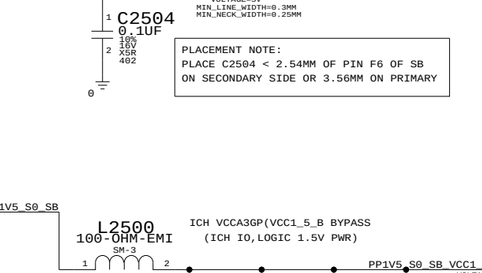

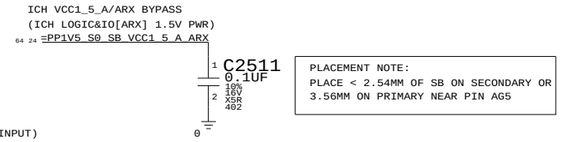

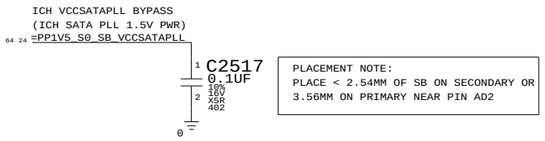

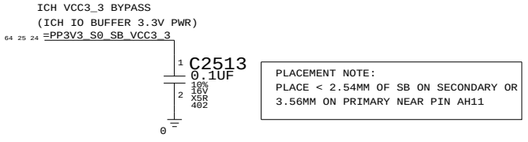

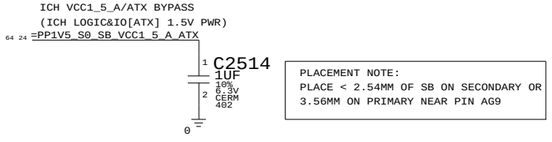

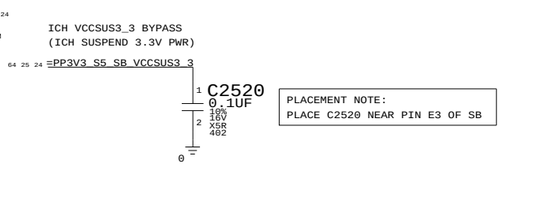

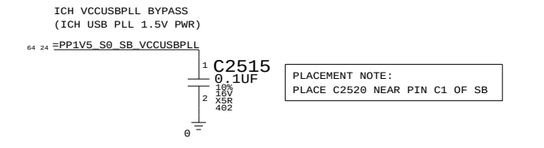

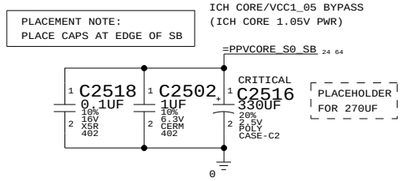

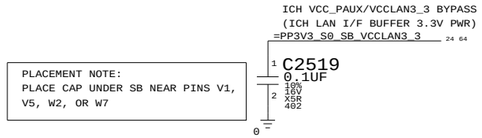



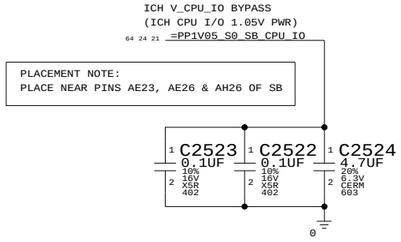

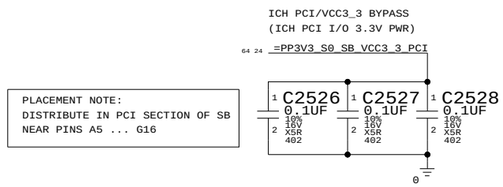

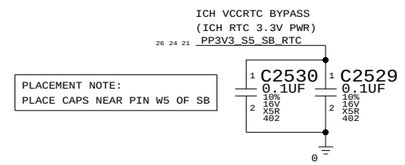

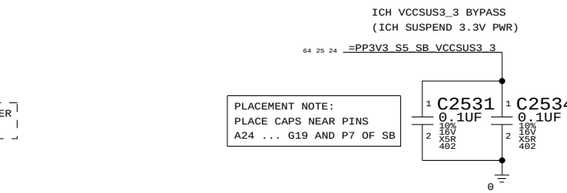





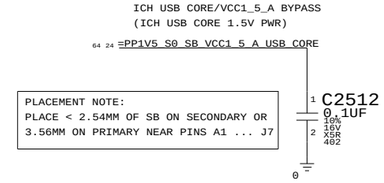

SB: 4 OF 4

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 25 OF 108	

WWW.AliSaler.Com

RTC Battery Connector

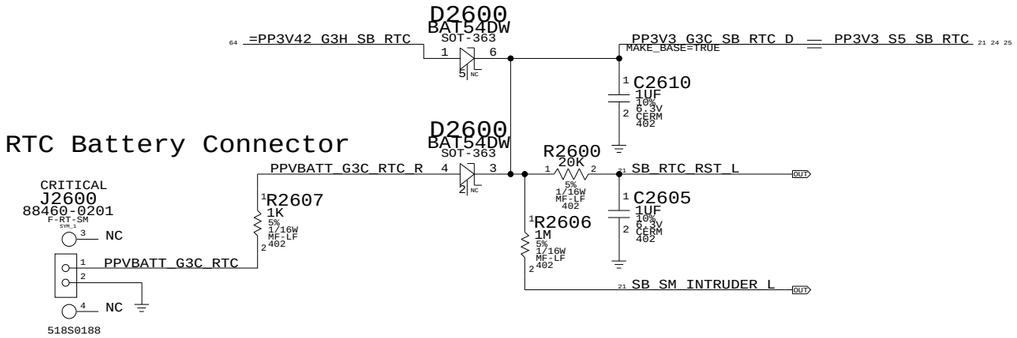

SB RTC Crystal Circuit

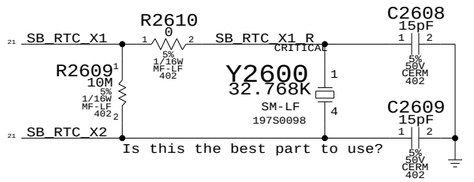

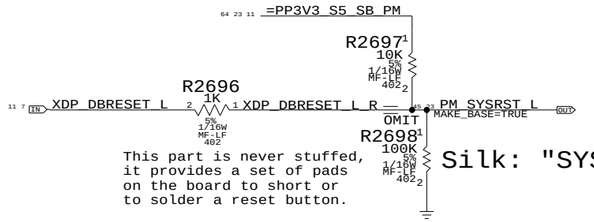

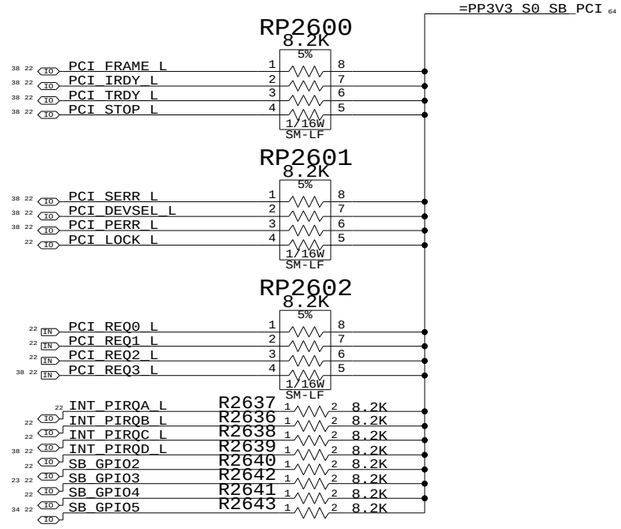

Platform Reset Connections

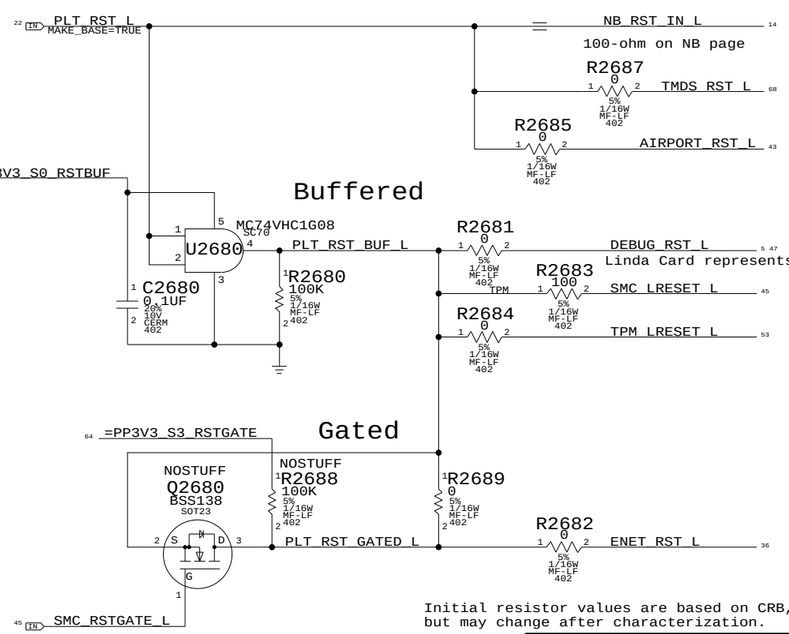

Initial resistor values are based on CRB,
but may change after characterization.

VR_PWRGD_CK410_L

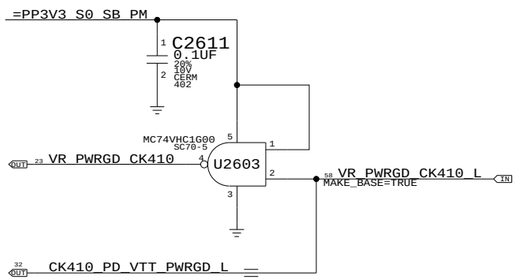

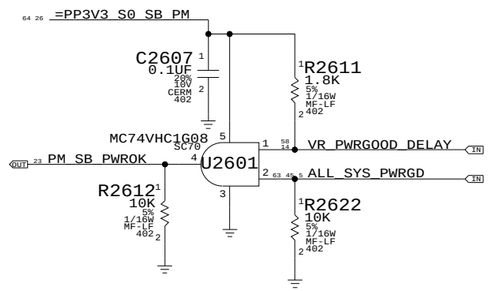

SB Misc

SYNC_MASTER=NB SYNC_DATE=07/26/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 26 OF 108	

WWW.AliSaler.Com

ICH7-M SMBus Connections

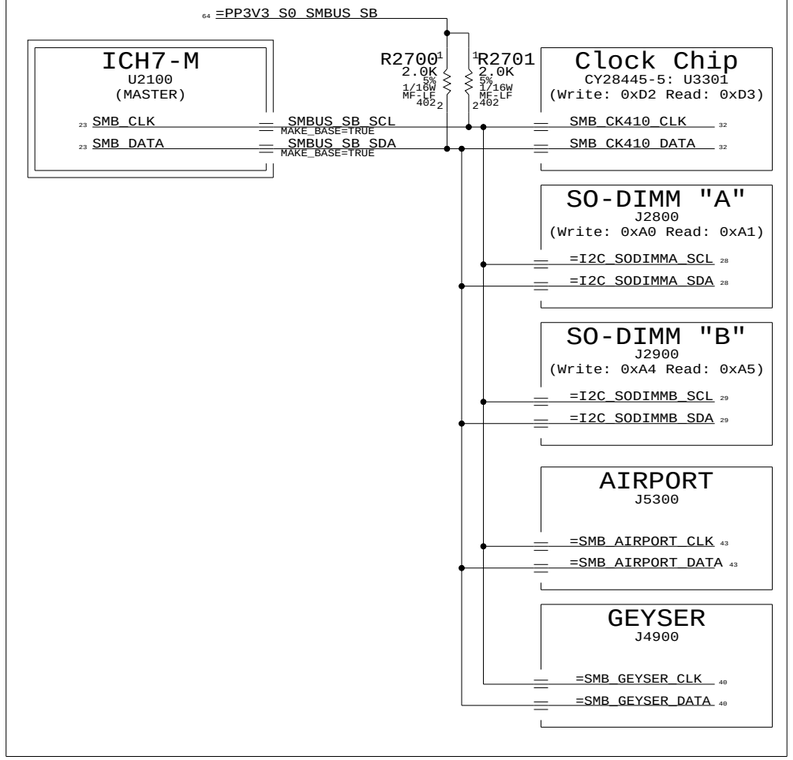

SMC "0" SMBus Connections

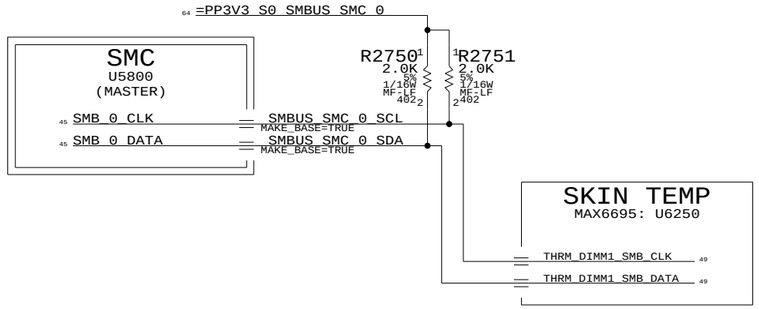

SMC "MLB" SMBus Connections

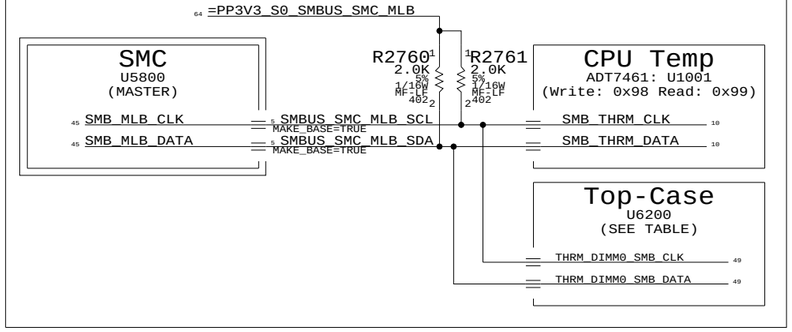

SMC "RMT" SMBus Connections

NOTE: SMC RMT bus remains powered and may be active in S3 state

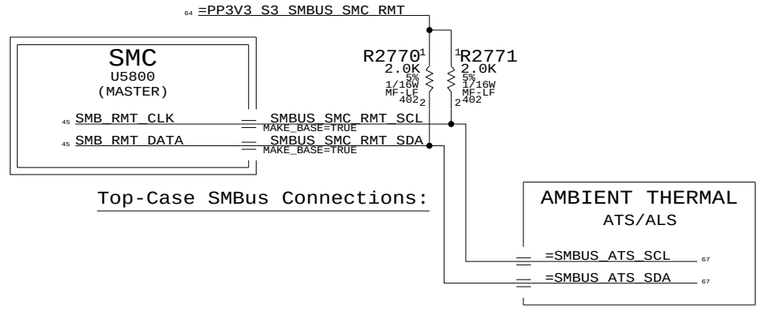

SMC "Battery A" SMBus Connections

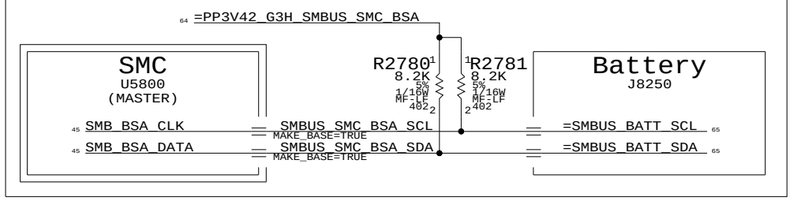

SMC "Battery B" SMBus Connections

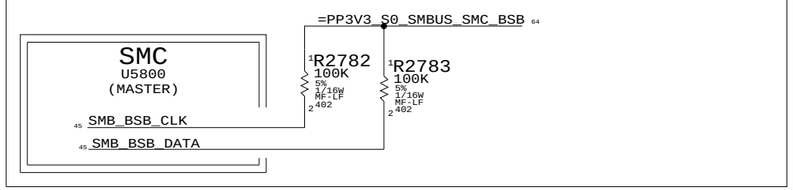

M42 SMBUS CONNECTIONS

SYNC_MASTER=ENET SYNC_DATE=08/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	27	108

WWW.AliSaler.Com

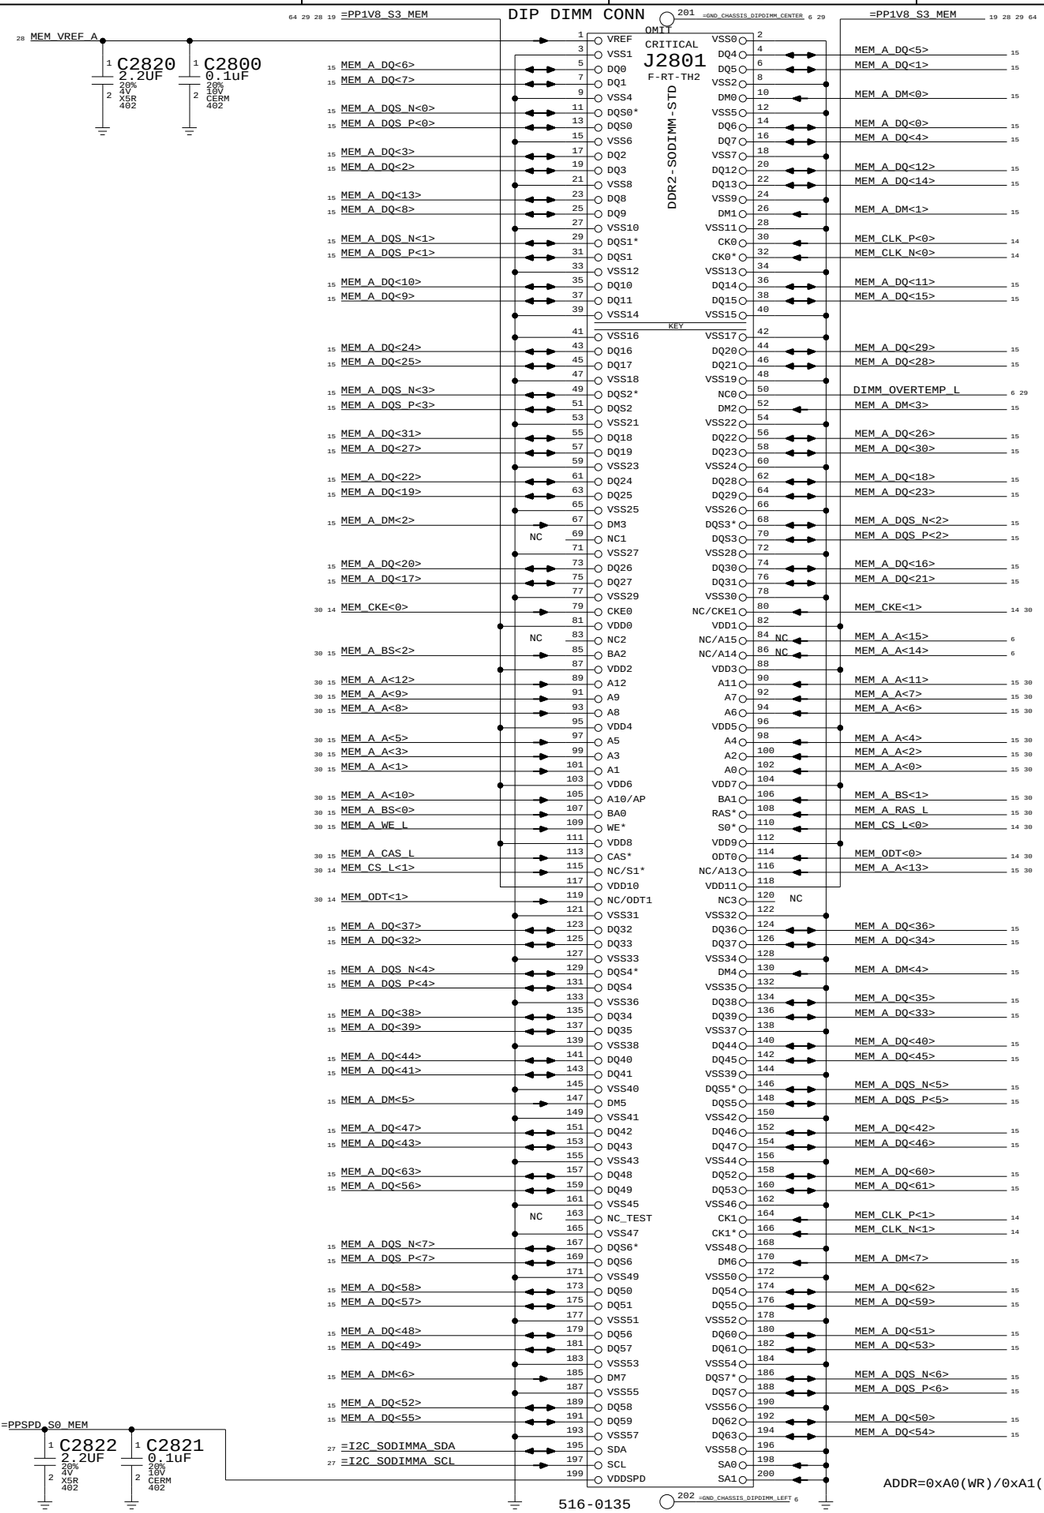
DIP DIMM CONN
OMIT
CRITICAL
J2801
F-RT-TH2
DDR2-SODIMM-STD
KEY
=PP1V8_S3_MEM
=GND_CHASSIS_DIPDIMM_CENTER
MEM_VREF_A
C2820 2.2UF 20% 4V X5R 402
C2800 0.1uF 20% 10V CERM 402
VREF VSS1 DQ0 DQ1 VSS4 DQS0* DQS0 VSS6 DQ2 DQ3 VSS8 DQ8 DQ9 VSS10 DQS1* DQS1 VSS12 DQ10 DQ11 VSS14 VSS16 DQ16 DQ17 VSS18 DQS2* DQS2 VSS21 DQ18 DQ19 VSS23 DQ24 DQ25 VSS25 DM3 NC1 VSS27 DQ26 DQ27 VSS29 CKE0 VDD0 NC2 BA2 VDD2 A12 A9 A8 VDD4 A5 A3 A1 VDD6 A10/AP BA0 WE* VDD8 CAS* NC/S1* VDD10 NC/ODT1 VSS31 DQ32 DQ33 VSS33 DQS4* DQS4 VSS36 DQ34 DQ35 VSS38 DQ40 DQ41 VSS40 DM5 VSS41 DQ42 DQ43 VSS43 DQ48 DQ49 VSS45 NC_TEST VSS47 DQS6* DQS6 VSS49 DQ50 DQ51 VSS51 DQ56 DQ57 VSS53 DM7 VSS55 DQ58 DQ59 VSS57 SDA SCL VDDSPD
VSS0 DQ4 DQ5 VSS2 DM0 VSS5 DQ6 DQ7 VSS7 DQ12 DQ13 VSS9 DM1 VSS11 CK0 CK0* VSS13 DQ14 DQ15 VSS15 VSS17 DQ20 DQ21 VSS19 NC0 DM2 VSS22 DQ22 DQ23 VSS24 DQ28 DQ29 VSS26 DQS3* DQS3 VSS28 DQ30 DQ31 VSS30 NC/CKE1 VDD1 NC/A15 NC/A14 VDD3 A11 A7 A6 VDD5 A4 A2 A0 VDD7 BA1 RAS* S0* VDD9 ODT0 NC/A13 VDD11 NC3 VSS32 DQ36 DQ37 VSS34 DM4 VSS35 DQ38 DQ39 VSS37 DQ44 DQ45 VSS39 DQS5* DQS5 VSS42 DQ46 DQ47 VSS44 DQ52 DQ53 VSS46 CK1 CK1* VSS48 DM6 VSS50 DQ54 DQ55 VSS52 DQ60 DQ61 VSS54 DQS7* DQS7 VSS56 DQ62 DQ63 VSS58 SA0 SA1
DIMM_OVERTEMP_L
MEM_CLK_P<0>
MEM_CLK_N<0>
MEM_CKE<1>
MEM_ODT<0>
MEM_ODT<1>
MEM_CS_L<0>
MEM_CS_L<1>
MEM_A_BS<0>
MEM_A_BS<1>
MEM_A_RAS_L
MEM_A_CAS_L
MEM_A_WE_L
MEM_A_A<0>
MEM_A_A<1>
MEM_A_A<2>
MEM_A_A<3>
MEM_A_A<4>
MEM_A_A<5>
MEM_A_A<6>
MEM_A_A<7>
MEM_A_A<8>
MEM_A_A<9>
MEM_A_A<10>
MEM_A_A<11>
MEM_A_A<12>
MEM_A_A<13>
MEM_A_A<14>
MEM_A_A<15>
MEM_A_BS<2>
MEM_A_DQ<0> MEM_A_DQ<1> MEM_A_DQ<2> MEM_A_DQ<3> MEM_A_DQ<4> MEM_A_DQ<5> MEM_A_DQ<6> MEM_A_DQ<7>
MEM_A_DQ<8> MEM_A_DQ<9> MEM_A_DQ<10> MEM_A_DQ<11> MEM_A_DQ<12> MEM_A_DQ<13> MEM_A_DQ<14> MEM_A_DQ<15>
MEM_A_DQ<16> MEM_A_DQ<17> MEM_A_DQ<18> MEM_A_DQ<19> MEM_A_DQ<20> MEM_A_DQ<21> MEM_A_DQ<22> MEM_A_DQ<23>
MEM_A_DQ<24> MEM_A_DQ<25> MEM_A_DQ<26> MEM_A_DQ<27> MEM_A_DQ<28> MEM_A_DQ<29> MEM_A_DQ<30> MEM_A_DQ<31>
MEM_A_DQ<32> MEM_A_DQ<33> MEM_A_DQ<34> MEM_A_DQ<35> MEM_A_DQ<36> MEM_A_DQ<37> MEM_A_DQ<38> MEM_A_DQ<39>
MEM_A_DQ<40> MEM_A_DQ<41> MEM_A_DQ<42> MEM_A_DQ<43> MEM_A_DQ<44> MEM_A_DQ<45> MEM_A_DQ<46> MEM_A_DQ<47>
MEM_A_DQ<48> MEM_A_DQ<49> MEM_A_DQ<50> MEM_A_DQ<51> MEM_A_DQ<52> MEM_A_DQ<53> MEM_A_DQ<54> MEM_A_DQ<55>
MEM_A_DQ<56> MEM_A_DQ<57> MEM_A_DQ<58> MEM_A_DQ<59> MEM_A_DQ<60> MEM_A_DQ<61> MEM_A_DQ<62> MEM_A_DQ<63>
MEM_A_DM<0> MEM_A_DM<1> MEM_A_DM<2> MEM_A_DM<3> MEM_A_DM<4> MEM_A_DM<5> MEM_A_DM<6> MEM_A_DM<7>
MEM_A_DQS_N<0> MEM_A_DQS_P<0> MEM_A_DQS_N<1> MEM_A_DQS_P<1> MEM_A_DQS_N<2> MEM_A_DQS_P<2> MEM_A_DQS_N<3> MEM_A_DQS_P<3>
MEM_A_DQS_N<4> MEM_A_DQS_P<4> MEM_A_DQS_N<5> MEM_A_DQS_P<5> MEM_A_DQS_N<6> MEM_A_DQS_P<6> MEM_A_DQS_N<7> MEM_A_DQS_P<7>
=I2C_SODIMMA_SDA
=I2C_SODIMMA_SCL
=PPSPD_S0_MEM
C2822 2.2UF 20% 4V X5R 402
C2821 0.1uF 20% 10V CERM 402
ADDR=0xA0(WR)/0xA1(RD)
516-0135

DDR2 VRef

One 0.1uF per connector



Yellow uses 10K divider and TLV2463
to drive MCH and DIMM connectors.
(See Capell Valley pg 47)

Page Notes

Power aliases required by this page:
- =PP1V8_S3_MEM
- =PPSPD_S0_MEM (2.5V - 3.3V)

Signal aliases required by this page:
- =I2C_MEM_SCL
- =I2C_MEM_SDA

BOM options provided by this page:
(NONE)

DDR2 Bypass Caps

(For return current)

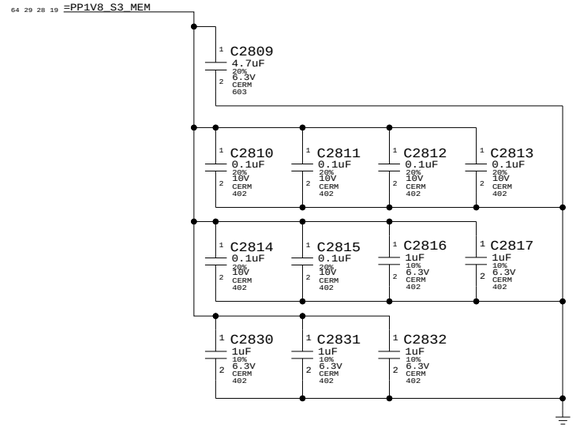

The 4.7uF and 1.0uF caps can be changed to 5x 2.2uF caps,
when they get cheaper.

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
516-0149	1	CONN,200P STD SODIMM OLD REV	J2801	CRITICAL	PVT-DIMM
516-0154	1	CONN,200P STD SODIMM NEW REV 3.5	J2801	CRITICAL	POST-RAMP-DIMM35

DDR2 SO-DIMM Connector A

SYNC_MASTER=MEMORY SYNC_DATE=06/20/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 28 OF 108	

WWW.AliSaler.Com

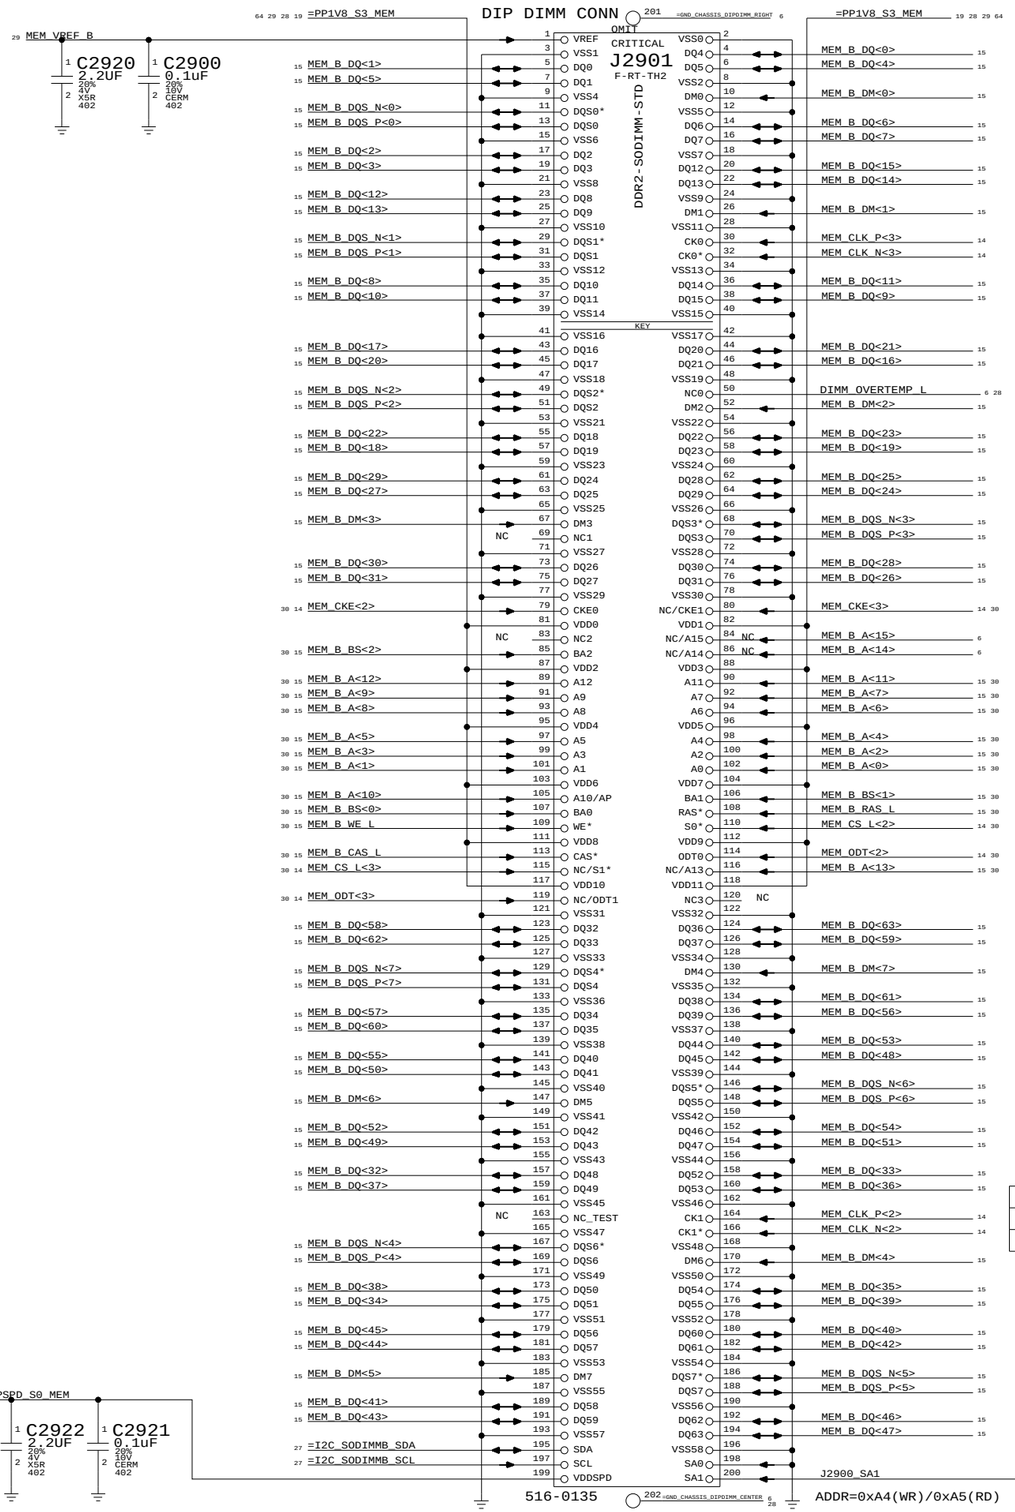

Resistor prevents pwr-gnd short

DDR2 VREF (FOR CONNECTOR B)

One 0.1uF per connector



Yellow uses 10K divider and TLV2463
to drive MCH and DIMM connectors.
(See Capell Valley pg 47)

Page Notes

Power aliases required by this page:
- =PP1V8_S3_MEM
- =PPSPD_S0_MEM (2.5V - 3.3V)

Signal aliases required by this page:
- =I2C_MEM_SCL
- =I2C_MEM_SDA

BOM options provided by this page:
(NONE)

NOTE: This page does not supply VREF.
The reference voltage must be provided
by another page.

DDR2 Bypass Caps

(For return current)

The 4.7uF and 1.0uF caps can be changed to 5x 2.2uF caps,
when they get cheaper.

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
516-0149	1	CONN,200P STD SODIMM OLD REV	J2901	CRITICAL	PVT-DIMM
516-0154	1	CONN,200P STD SODIMM NEW REV 3.5	J2901	CRITICAL	POST-RAMP-DIMM35

DDR2 SO-DIMM Connector B

SYNC_MASTER=MEMORY SYNC_DATE=06/20/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE SHT 29 OF 108

WWW.AliSaler.Com

One cap for each side of every RPAK, one cap for every two discrete resistors
BOMOPTION shown at the top of each group applies to every part below it

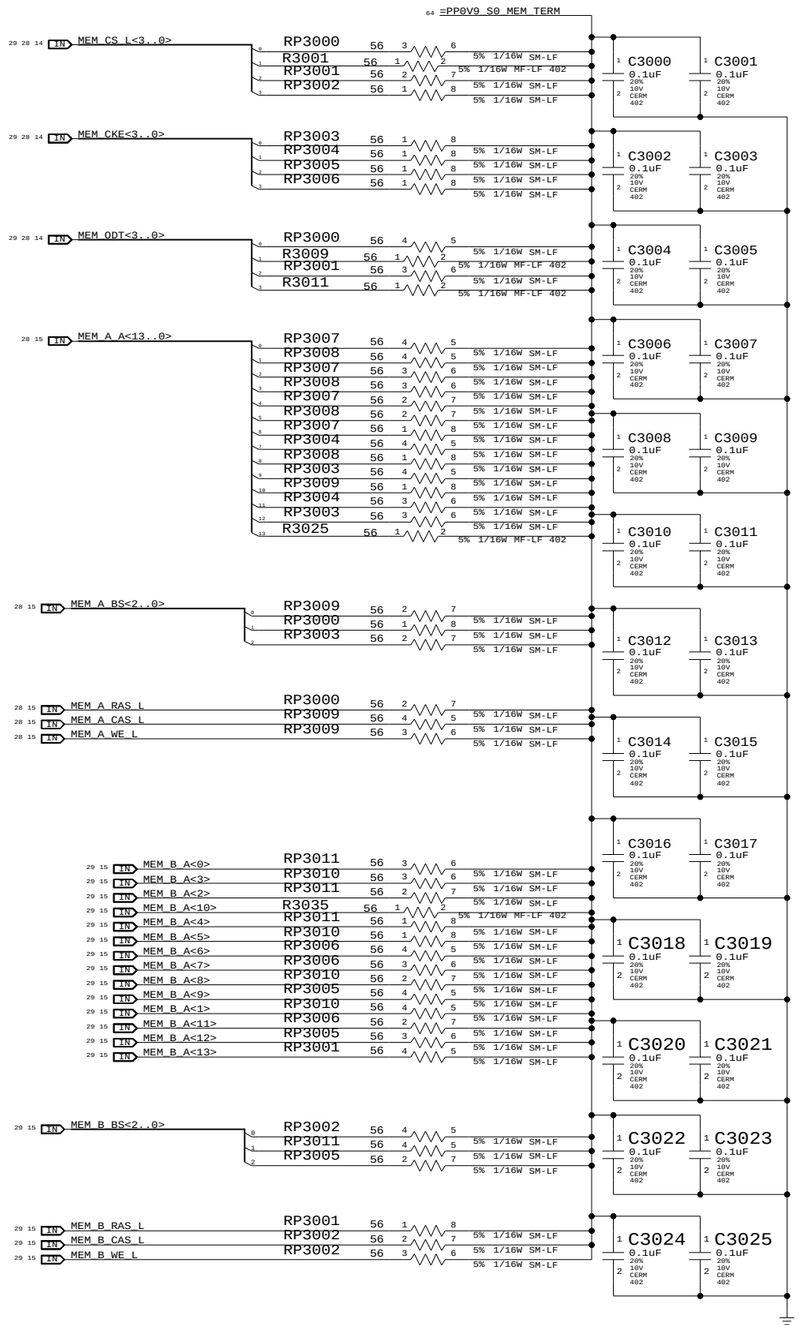

LAYOUT NOTE:PLACE ONE CAP CLOSE TO EVERY TWO PULLUP RESISTORS TERMINATED TO PP0V9_S0_MEM_TERM

Memory Active Termination

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	30	108

WWW.AliSaler.Com

Page Notes

Power aliases required by this page:
- =PP5V_S0_MEMVTT
- =PP1V8_S0_MEMVTT
- =PP0V9_S0_MEMVTT_LDO

Signal aliases required by this page:
(NONE)

BOM options provided by this page:
(NONE)

DDR2 Vtt Regulator

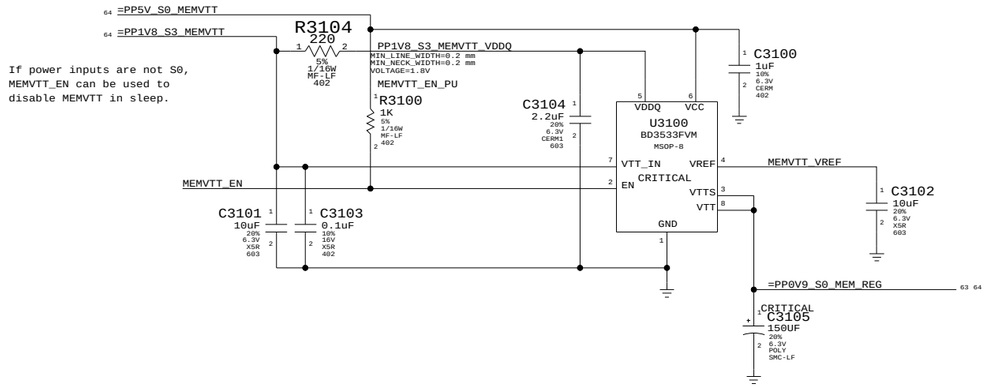

Memory Vtt Supply

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 31 OF 108	

WWW.AliSaler.Com

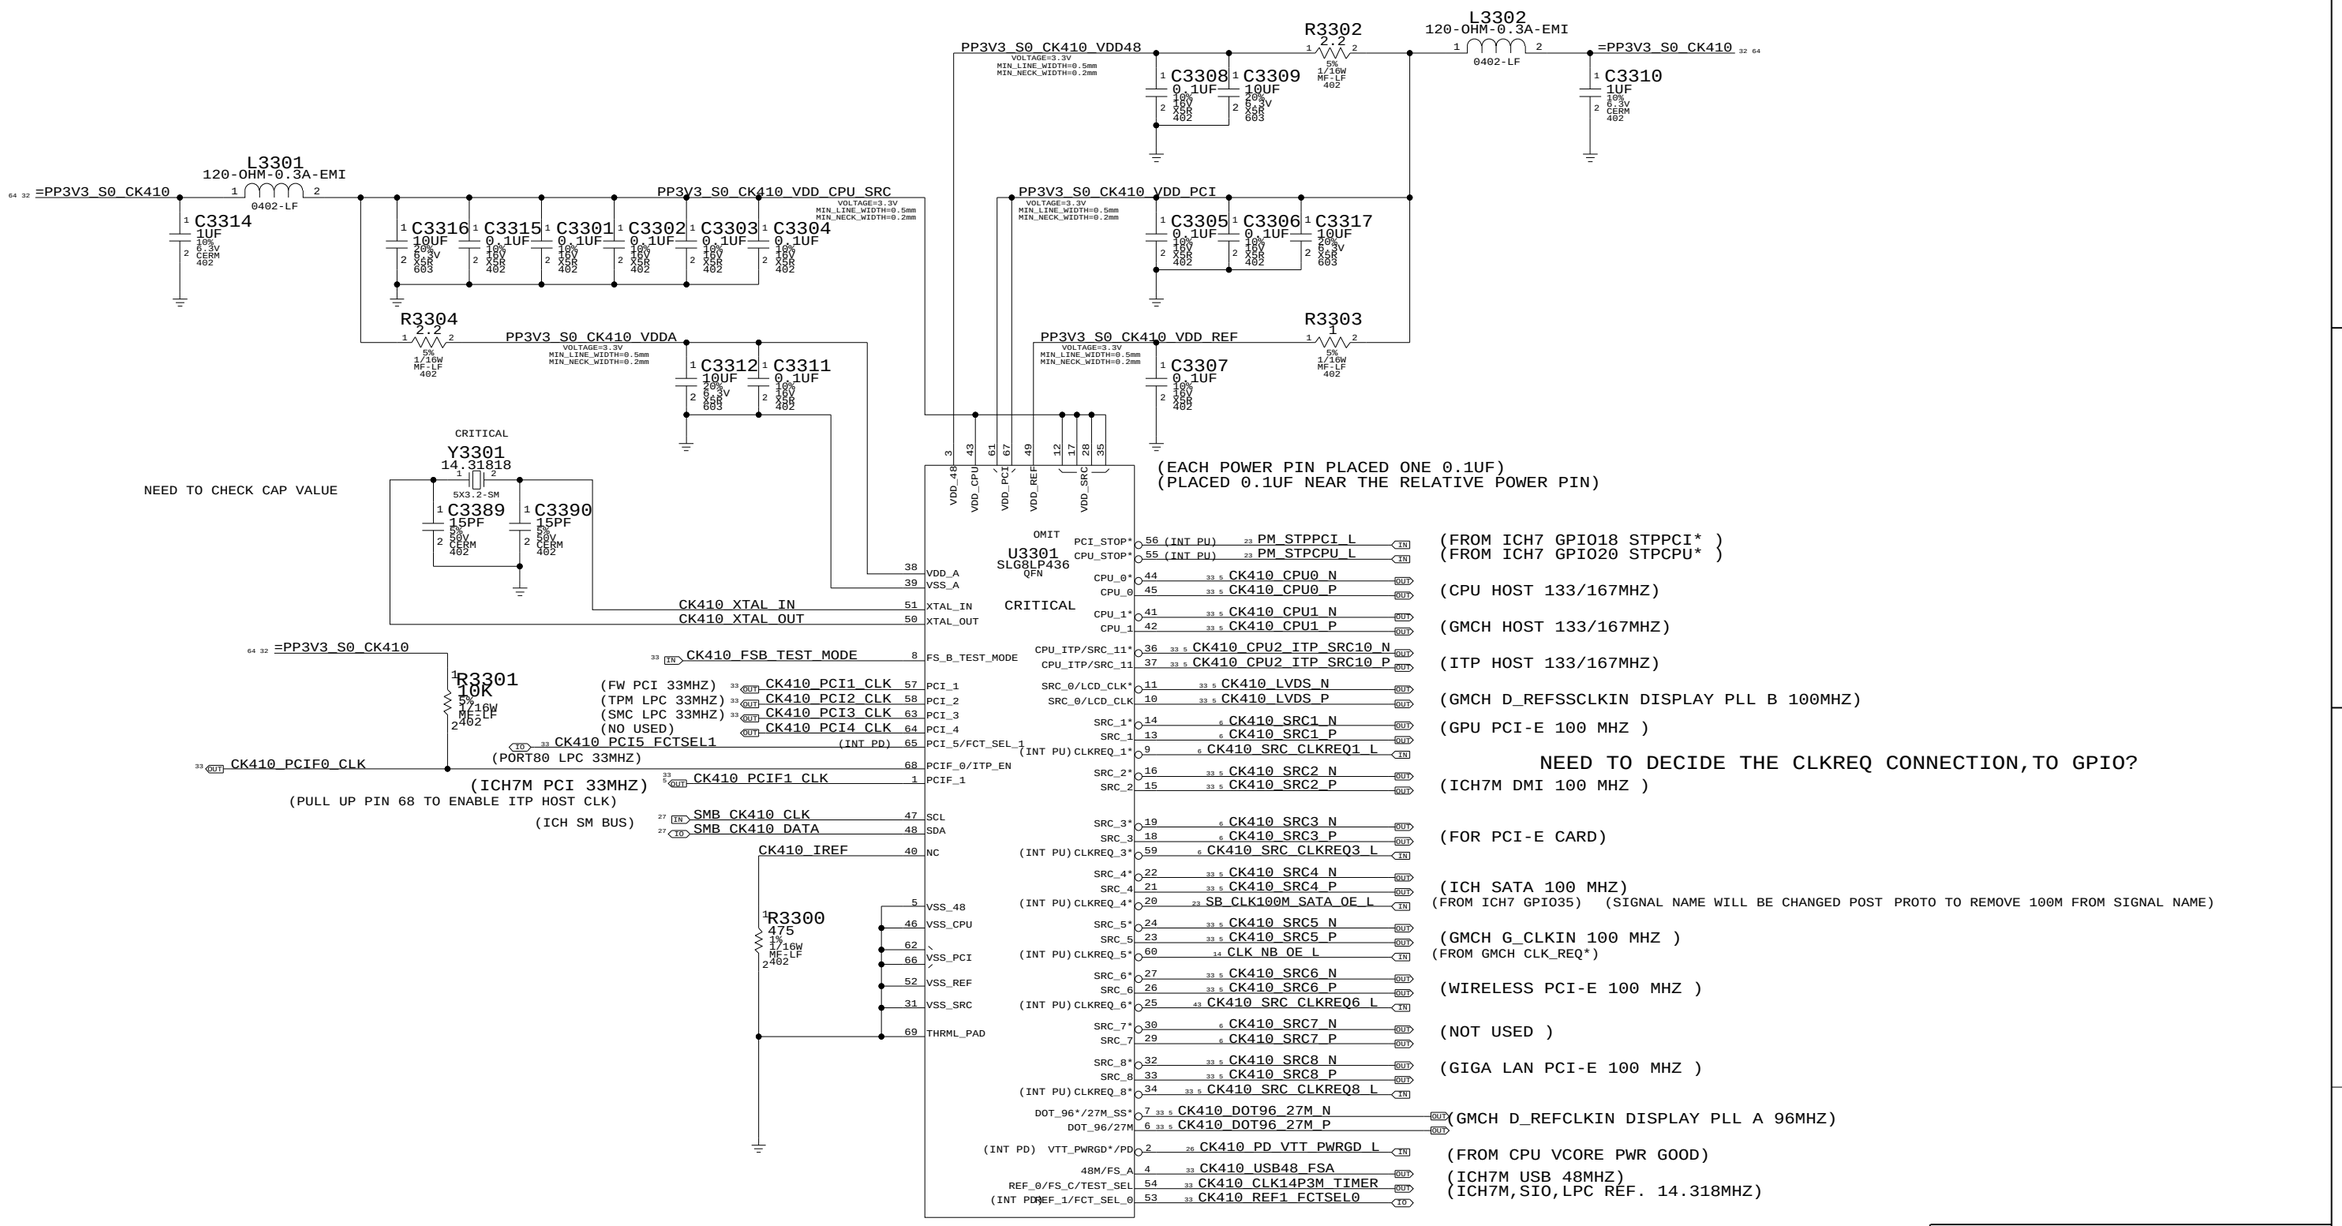

FCTSEL1	FCTSEL0	PIN 6	PIN 7	PIN 10	PIN 11	
0	0	DOT96T	DOT96C	100MT_SST	100MC_SST	* FOR INT. GRAPHIC SYSTEM
0	1	DOT96T	DOT96C	SRCT0	SRCC0	
1	0	27M NON SPREAD	27M SPREAD	SRCT0	SRCC0	* FOR EXT. GRAPHIC SYSTEM
1	1	OFF LOW	TBD	SRCT0	SRCC0	

CLOCKS

SYNC_MASTER=CLOCK SYNC_DATE=06/03/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	33	108

WWW.AliSaler.Com

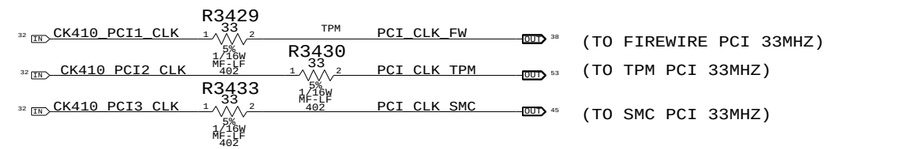

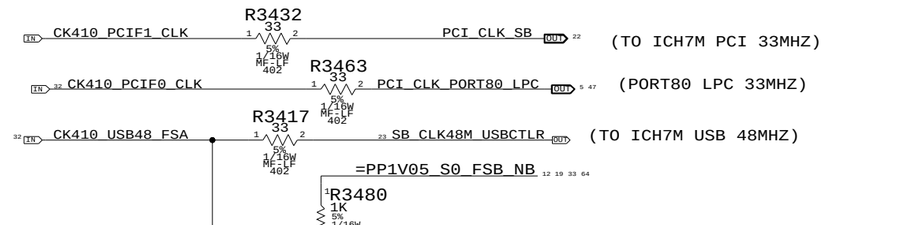

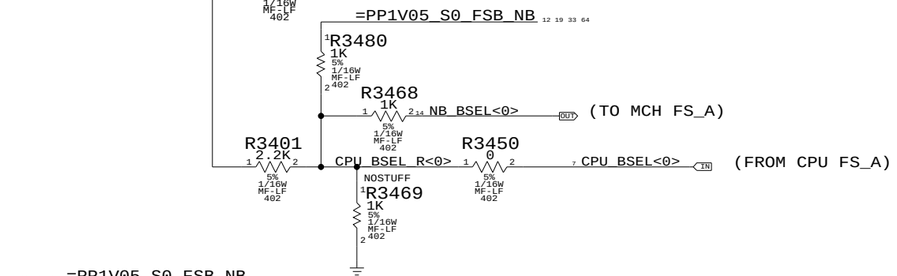

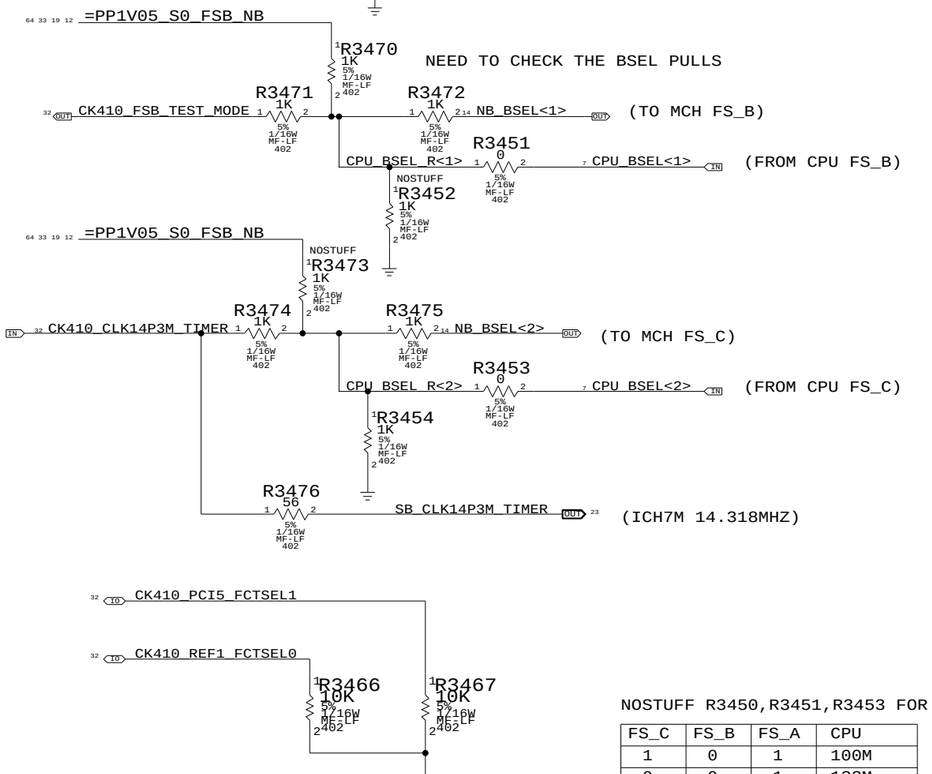

SET FCTSEL0,FCTSEL1 TO 00
EVEN THESE TWO PINS INTERNAL PULL DOWN,
CYPRESS RECOMMAND TO ADD EXTERNAL PULLS,

NOSTUFF R3450,R3451,R3453 FOR MANUAL CPU FREQUENCY

	FS_C	FS_B	FS_A	CPU
	1	0	1	100M
	0	0	1	133M
#	0	1	1	166M
	0	1	0	200M

NAPA PLATFORM ONLY SUPPORT 133M/166M CPU SPEED, M42 133MHZ

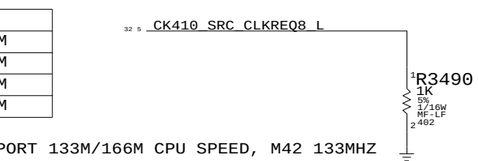

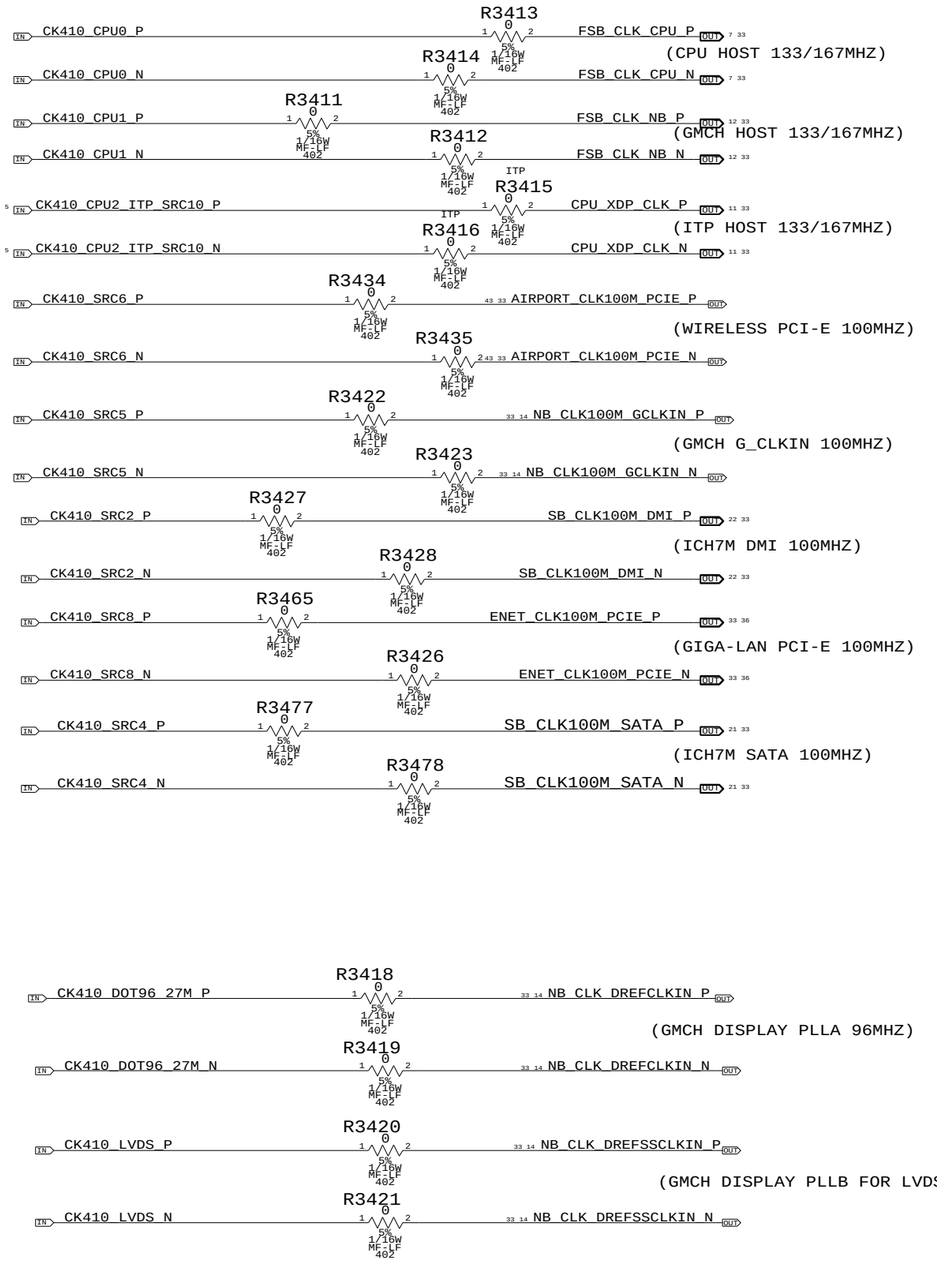

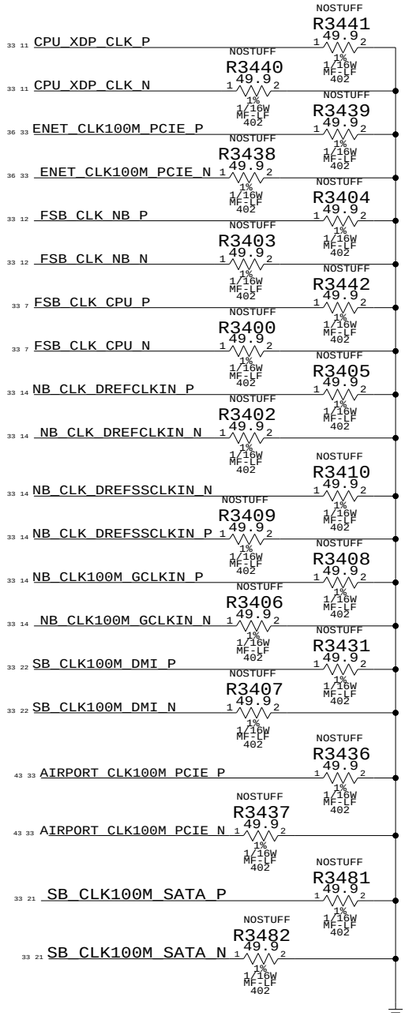

CLOCK TERMINATION

SYNC_MASTER=CLOCK SYNC_DATE=06/06/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	34	108

WWW.AliSaler.Com

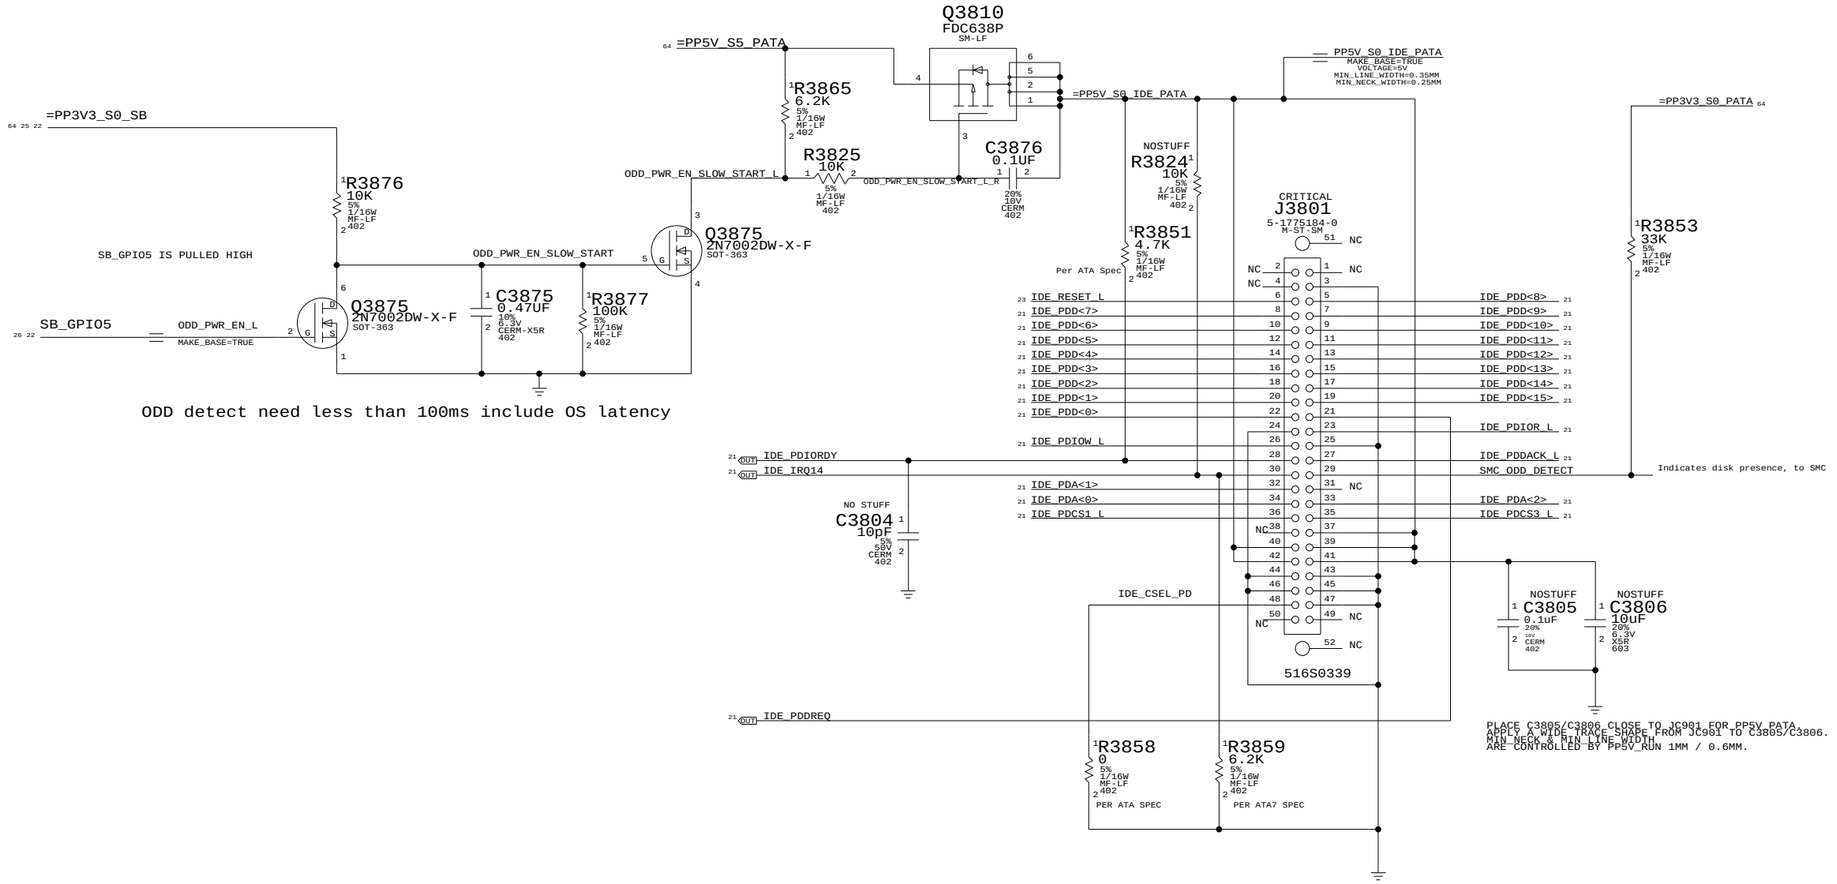

ODD detect need less than 100ms include OS latency

PATA CONNECTOR

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE

SHT 38 OF 108

WWW.AliSaler.Com

SATA CONNECTOR

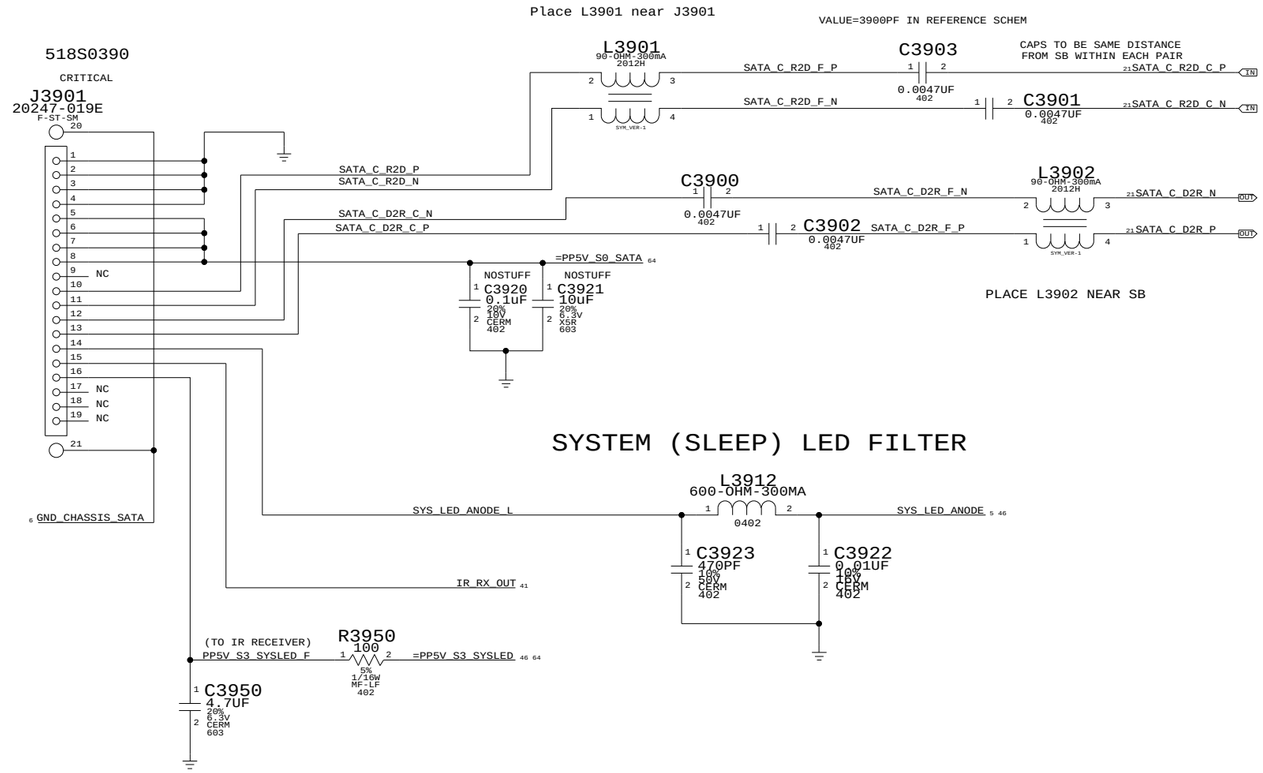

SYSTEM (SLEEP) LED FILTER

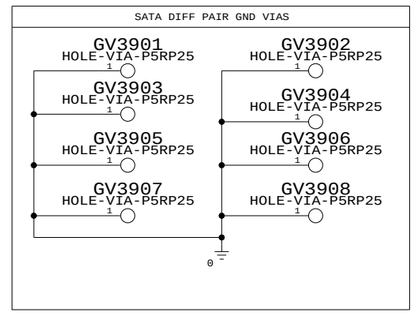

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
155S0227	155S0164	?	L3901,L3902	KEEP MAG.LAYER IN BOM

SATA CONNECTOR

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 39 OF 108	

WWW.AliSaler.Com

PLACE C4100-C4106 NEAR PINS AVDLL0-AVDLL6.
SCHEME MATCHES DOC MVL100258-01

MIN_LINE_WIDTH=0.4MM
MIN_NECK_WIDTH=0.22MM
VOLTAGE=2.5V

37 PP2V5_S3_ENET_AVDD

C4100 1UF 10% 6.3V CERM 402
C4101 0.1UF 10% 16V X5R 402
C4102 0.1UF 10% 16V X5R 402
C4103 0.1UF 10% 16V X5R 402
C4104 0.1UF 10% 16V X5R 402
C4105 0.001UF 10% 50V CERM 402
C4106 0.001UF 10% 50V CERM 402
C4107 0.1UF 10% 16V X5R 402

PLACE C4107 NEAR U4101 AVDD

L4100
FERR-120-OHM-1.5A
0402-LF
=PP2V5_S3_ENET 64

64 36 =PP3V3_S3_ENET

R4101 4.7K 5% 1/16W MF-LF 402
=PP1V2_S3_ENET 36 64
=PP3V3_S3_ENET 36 64

PLACE C4110 AND C4111 WITHIN
12 MIL OF U4101 PIN 49 AND 50

C4110 0.1UF 10% 16V X5R 402
C4111 0.1UF 10% 16V X5R 402

NOSTUFF
R4107 0 5% 1/16W MF-LF 402
22 SB_GPIO30
ENET_LOM_DIS_L

PCIE_A_D2R_C_P
PCIE_A_D2R_C_N
PCIE_A_D2R_P
PCIE_A_D2R_N

C4112 0.1UF X5R 10% 16V 402
C4113 0.1UF X5R 16V 10% 402

PLACE C4113 AND C4112 WITHIN
12 MIL OF U2100 E27 AND E28

PCIE_A_R2D_P
PCIE_A_R2D_N
PCIE_A_R2D_C_P
PCIE_A_R2D_C_N

OMIT
CRITICAL
U4101
88E8053
QFN

ANALOG
PCI EXPRESS
MEDIA
LED
TEST
TWSI
SPI
MAIN CLK

OPTIONAL EXTERNAL LDO
NO PULL-UP NEEDED

ENET_CTRL25
ENET_CTRL12
ENET_RSET
R4102 4.75K 1% 1/16W MF-LF 402

ENET_CLK100M_PCIE_P
ENET_CLK100M_PCIE_N
PCIE_WAKE_L
ENET_RST_L

ENET_MDI_P<0>
ENET_MDI_N<0>
ENET_MDI_P<1>
ENET_MDI_N<1>
ENET_MDI_P<2>
ENET_MDI_N<2>
ENET_MDI_P<3>
ENET_MDI_N<3>

R4106 49.9 1% 1/16W MF-LF 402
R4105 49.9 1% 1/16W MF-LF 402
R4104 49.9 1% 1/16W MF-LF 402
R4103 49.9 1% 1/16W MF-LF 402
R4120 49.9 1% 1/16W MF-LF 402
R4119 49.9 1% 1/16W MF-LF 402
R4118 49.9 1% 1/16W MF-LF 402
R4117 49.9 1% 1/16W MF-LF 402

ENET_MDI0
ENET_MDI1
ENET_MDI2
ENET_MDI3

C4116 0.001UF 10% 50V CERM 402
C4115 0.001UF 10% 50V CERM 402
C4117 0.001UF 10% 50V CERM 402
C4118 0.001UF 10% 50V CERM 402

PLACE RESISTORS CLOSE TO U4101

ENET_VPD_CLK
ENET_VPD_DATA
ENET_PU_VDD_TTL0
ENET_PU_VDD_TTL1

ASF IS UNAVAILABLE ON 8053

INTERNAL PULL-UP

1. KEEP ENET_XTALI AND ENET_XTALO TRACE LENGTH <12MIL
2. DO NOT ROUTE UNDER CRYSTAL

CRITICAL
Y4101 25.0000M SM-3.2X2.5MM
C4150 15PF 5% 50V CERM 402
C4151 15PF 5% 50V CERM 402

THRML_PAD

=PP3V3_S3_ENET
R4130 4.7K 5% 1/16W MF-LF 402
R4131 4.7K 5% 1/16W MF-LF 402

PLACE C4140 NEAR U4102 VCC
C4140 0.1UF 10% 16V X5R 402

OMIT
CRITICAL
U4102
M24C08
SO8
VCC
E2
NC1
NC0
WC*
SDA
SCL
VSS

R4122 4.7K 5% 1/16W MF-LF 402
R4123 4.7K 5% 1/16W MF-LF 402

NOSTUFF
R4124 0 5% 1/16W MF-LF 402

PLACE C4127-C4134 NEAR PINS VDD0-VDD7 ON U4101
SCHEME MATCHES DOC MVL100258-01

C4126 0.1UF 10% 16V X5R 402
C4127 0.1UF 10% 16V X5R 402
C4128 0.1UF 10% 16V X5R 402
C4129 0.1UF 10% 16V X5R 402
C4130 0.1UF 10% 16V X5R 402
C4131 0.001UF 10% 50V CERM 402
C4132 0.001UF 10% 50V CERM 402
C4133 0.001UF 10% 50V CERM 402
C4134 0.001UF 10% 50V CERM 402

PLACE C4135-C4139 NEAR VDDO_TTL0-VDD_TTL4 ON U4101
SCHEME MATCHES DOC MVL100258-01

C4135 0.1UF 10% 16V X5R 402
C4136 0.1UF 10% 16V X5R 402
C4137 0.1UF 10% 16V X5R 402
C4138 0.001UF 10% 50V CERM 402
C4139 0.001UF 10% 50V CERM 402

ETHERNET CONTROLLER

SYNC_MASTER=ENET
SYNC_DATE=12/06/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 41 OF 108	

WWW.AliSaler.Com

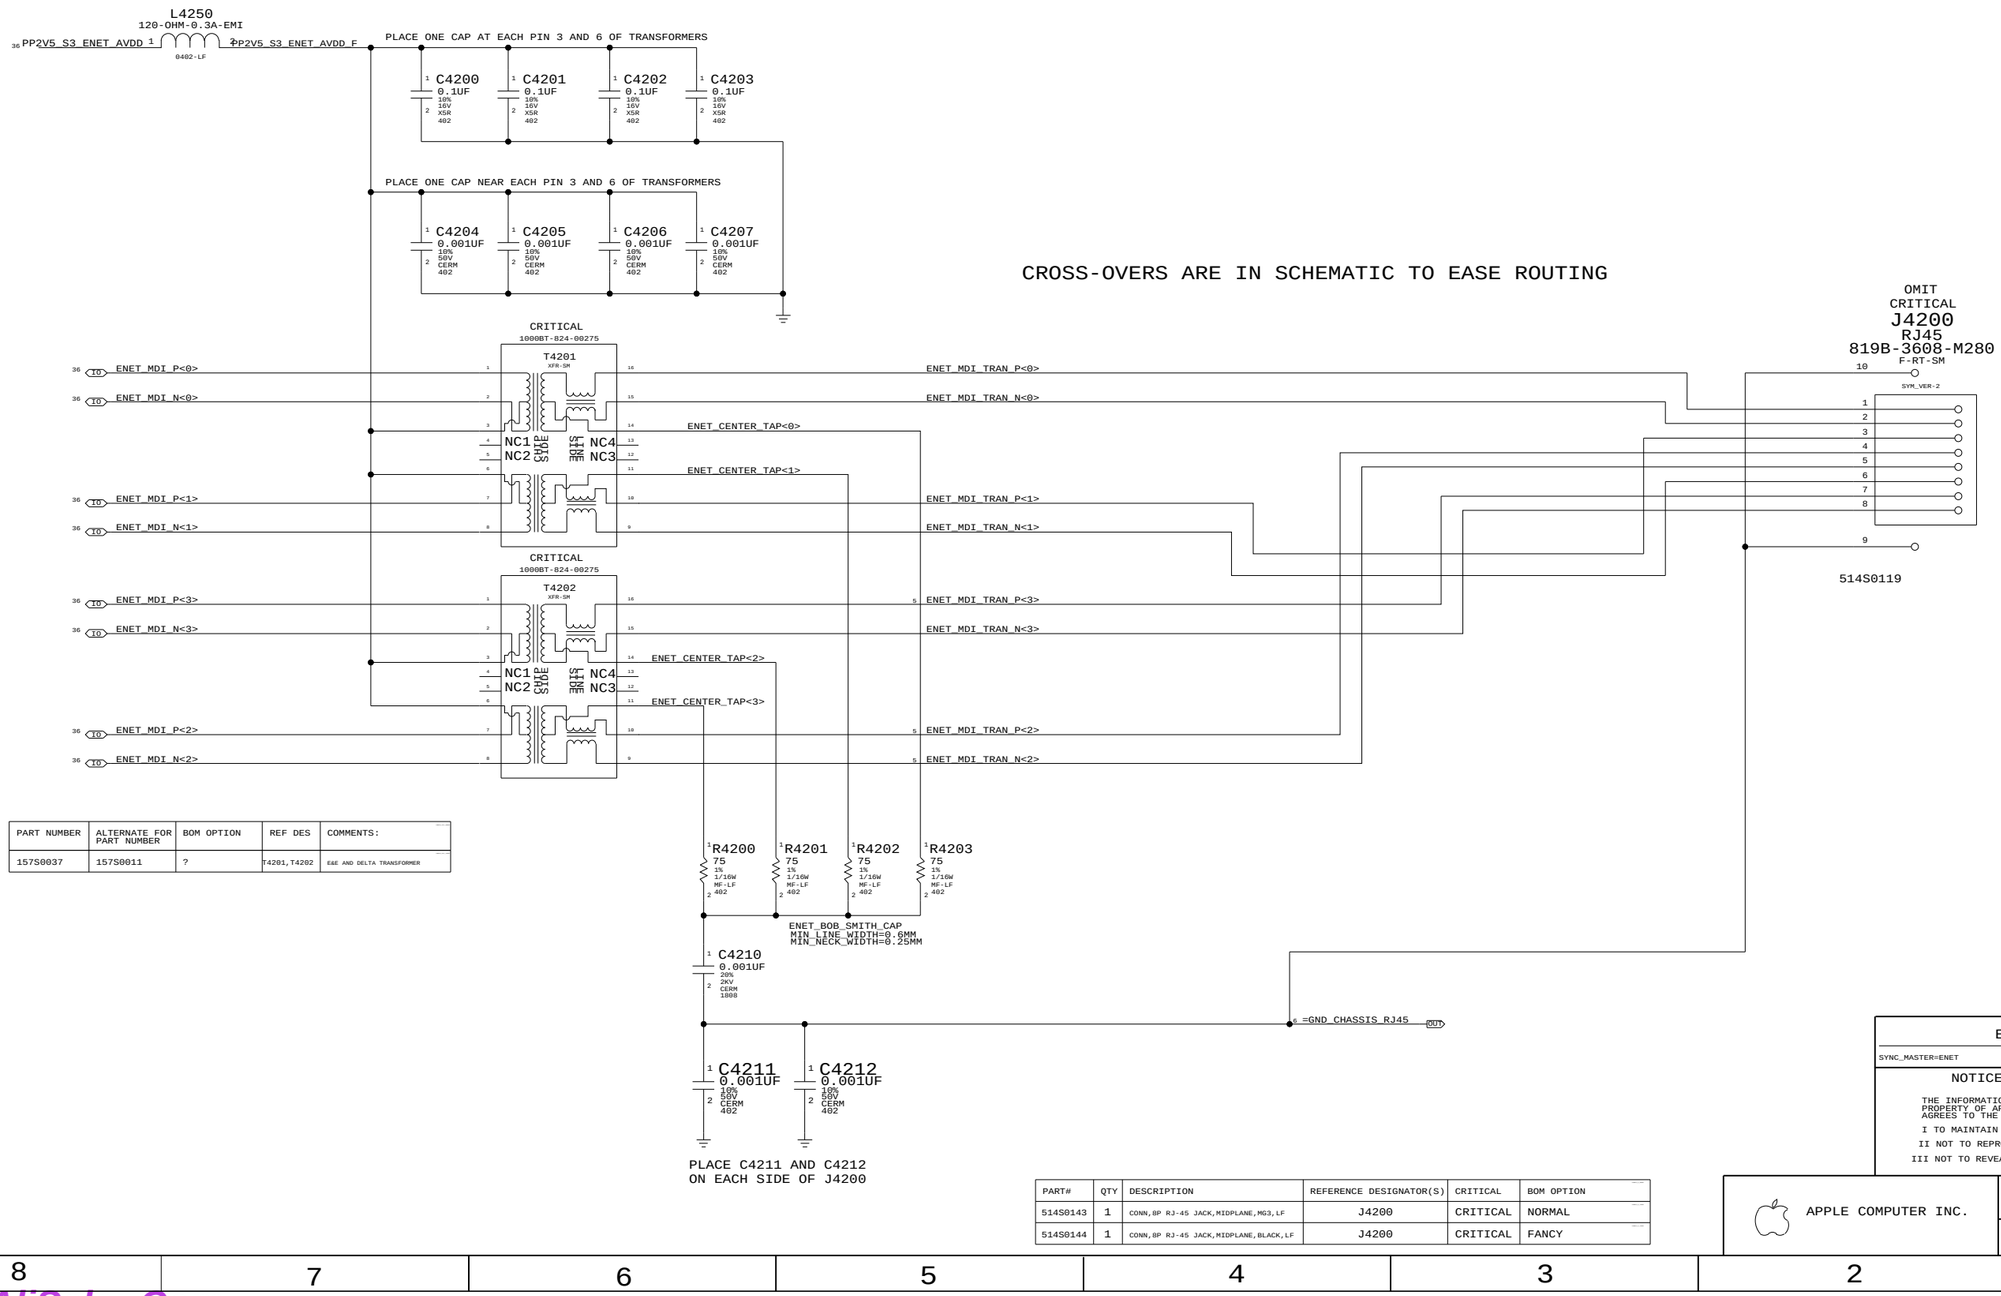

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
157S0037	157S0011	?	T4201,T4202	E&E AND DELTA TRANSFORMER

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
514S0143	1	CONN,8P RJ-45 JACK,MIDPLANE,MG3,LF	J4200	CRITICAL	NORMAL
514S0144	1	CONN,8P RJ-45 JACK,MIDPLANE,BLACK,LF	J4200	CRITICAL	FANCY

ETHERNET CONNECTOR

SYNC_MASTER=ENET SYNC_DATE=11/14/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE SHT 42 OF 108

WWW.AliSaler.Com

PAGE NOTES

INPUT

=PP3V3_S0_FW - 3.3V POWER FOR FIREWIRE (MOBILE: OFF DURING SLEEP)
=PP3V3_S0_PCI - 3.3V POWER FOR PCI FIREWIRE (MOBILE: OFF DURING SLEEP)
PCI_GNT3_L - PCI GRANT FROM SB
PCI_CLK_FW - NEED TO REFERENCE TO ALIAS PAGE
PCI_RST_L - PCI RESET FROM SB
FW_PC0 - FIREWIRE POWER CLASS IDENTIFIER

INPUT/OUTPUT

PCI_AD<0..31>,PCI_C_BE_L<0..3>,PCI_FRAME_L,PCI_IRDY_L,PCI_TRDY_L,
PCI_DEVSEL_L, PCI_STOP_L, PCI_PAR, PCI_PERR_L, PCI_SERR_L
FW_A_TPA_P/N, FW_A_TPB_P/N, FW_A_TPBIAS - PORT 0 FIREWIRE DIFF PAIRS
FW_B_TPA_P/N, FW_B_TPB_P/N, FW_B_TPBIAS - PORT 1 FIREWIRE DIFF PAIRS
FW_C_TPA_P/N, FW_C_TPB_P/N, FW_C_TPBIAS - PORT 2 FIREWIRE DIFF PAIRS

OUTPUT

PCI_REQ3_L - PCI REQUEST TO SB
PM_CLKRUN_L - CLOCK-RUN PCI PROTOCOL
INT_PIRQD_L - INTERRUPT TO SB
PCI_PME_FW_L - DEDICATED PME FOR FIREWIRE (SB GPIO1)

PAGE HISTORY

5/19/2005 - FIRST REVISION OF PAGE
6/20/2005 - BGA VERSION OF FW323-06 ADDED
6/21/2005 - CHANGED INT* TO INT_PIRQD_L (PER ARCHITECTURAL DEFINITION)
6/21/2005 - CHANGED PCI_ID TO AD19 (PER ARCHITECTURAL DEFINITION)
6/21/2005 - CHANGED REQ/GNT TO REQ3/GNT3 (PER ARCHITECTURAL DEFINITION)
6/22/2005 - ADDED 510R PULL-DOWN ON RST* AND REMOVED CONNECTION TO PLT_RST_L
6/22/2005 - CHANGED CLK_PME_DIFF_PAIR NAMES TO BE RE-USE COMPLIANT
6/22/2005 - REMOVED CONSTRAINT SETS AS THEY WILL BE MANAGED ON BOARD SIDE
6/22/2005 - REMOVED C4421 - REDUNDANT
6/22/2005 - BRING OUT PCB CONNECTION TO BE CONNECTED ON PORT PAGE
7/26/2005 - CONNECTED PIN E10 TO GND

MOBILE TURNS OFF CONTROLLER POWER DURING SLEEP
0.001A DURING SLEEP

64 =PP3V3_S3_FW

PLACE ONE CAP PER TWO PINS STARTING WITH C4424 ON VDD0

C4424 10UF 20% 6.3V X5R 603
C4418 0.1UF 10% 10V X5R 402
C4422 0.1UF 10% 10V X5R 402
C4426 0.1UF 10% 10V X5R 402
C4428 0.1UF 10% 10V X5R 402
C4430 0.1UF 10% 10V X5R 402
C4432 0.1UF 10% 10V X5R 402

L4400
600-OHM-300MA
0402

PLACE ONE CAP PER TWO PINS STARTING WITH C4416 ON VDDA0

PP3V3_S3_FW_AVDD
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.2MM

C4416 10UF 20% 6.3V X5R 603
C4417 0.1UF 10% 10V X5R 402
C4429 0.1UF 10% 10V X5R 402
C4425 0.1UF 10% 10V X5R 402

64 =PP3V3_S3_PCI

VDD0 G4, VDD1 M1, VDD2 M2, VDD3 K5, VDD4 K7, VDD5 L13, VDD6 H13, VDD7 H1, VDD9 A2
VDDA0 D10, VDDA1 A13, VDDA2 B13, VDDA3 A7, VDDA4 A8, VDDA5 D6

CONNECT TO VDD FOR 3.3V OPERATION

PCI_VIOS G13

PCI_AD<0> F10 PCI_AD0
PCI_AD<1> G10 PCI_AD1
PCI_AD<2> H10 PCI_AD2
PCI_AD<3> H12 PCI_AD3
PCI_AD<4> J13 PCI_AD4
PCI_AD<5> J12 PCI_AD5
PCI_AD<6> K13 PCI_AD6
PCI_AD<7> K10 PCI_AD7
PCI_AD<8> L12 PCI_AD8
PCI_AD<9> M13 PCI_AD9
PCI_AD<10> L11 PCI_AD10
PCI_AD<11> M12 PCI_AD11
PCI_AD<12> M11 PCI_AD12
PCI_AD<13> N12 PCI_AD13
PCI_AD<14> M10 PCI_AD14
PCI_AD<15> N11 PCI_AD15
PCI_AD<16> M4 PCI_AD16
PCI_AD<17> N5 PCI_AD17
PCI_AD<18> N4 PCI_AD18
PCI_AD<19> M3 PCI_AD19
PCI_AD<20> M2 PCI_AD20
PCI_AD<21> N3 PCI_AD21
PCI_AD<22> K4 PCI_AD22
PCI_AD<23> M1 PCI_AD23
PCI_AD<24> K2 PCI_AD24
PCI_AD<25> J4 PCI_AD25
PCI_AD<26> K1 PCI_AD26
PCI_AD<27> J2 PCI_AD27
PCI_AD<28> J1 PCI_AD28
PCI_AD<29> H2 PCI_AD29
PCI_AD<30> H4 PCI_AD30
PCI_AD<31> H1 PCI_AD31

PCI_C_BE_L<0> K12 PCI_CBE0*
PCI_C_BE_L<1> M9 PCI_CBE1*
PCI_C_BE_L<2> L3 PCI_CBE2*
PCI_C_BE_L<3> L1 PCI_CBE3*

R4431 22 5% 1/16W MF-LF 402

PCI_PAR N10 PCI_PAR
PCI_FRAME_L N6 PCI_FRAME*
PCI_IRDY_L M6 PCI_IRDY*
PCI_TRDY_L N7 PCI_TRDY*
PCI_DEVSEL_L N8 PCI_DEVSEL*
PCI_STOP_L M7 PCI_STOP*
FW_PCI_IDSEL L2 PCI_IDSEL

PCI_REQ3_L E2 PCI_REQ*
PCI_GNT3_L E1 PCI_GNT*
PCI_PERR_L M8 PCI_PERR*
PCI_SERR_L N9 PCI_SERR*

PCI_CLK_FW G2 PCI_CLK
PM_CLKRUN_L D1 CLKRUN*

R4432 100 1% 1/16W MF-LF 402

PCI_RST_L
FW_PCI_RST_L F1 PCI_RST*
INT_PIRQD_L D2 PCI_INTA*
PCI_PME_FW_L F2 PCI_PME*

THIS IS FROM ICH-7M

PLACE R4432 VERY CLOSE TO PIN B18 OF U2100

OMIT
CRITICAL
U4400
FW32306
BGA

VSS0 A1, VSS1 B2, VSS2 C3, VSS3 D4, VSS4 E4, VSS5 E5, VSS6 F4, VSS7 F6, VSS8 F7, VSS9 F8, VSS10 G1, VSS11 G6, VSS12 G7, VSS13 G8, VSS14 H6, VSS15 H7, VSS16 H8, VSS17 J5, VSS18 J9, VSS19 J10, VSS20 K8, VSS21 K9, VSS22 N13
VSSA0 E13, VSSA1 E9, VSSA2 D9, VSSA3 D7, VSSA4 D5

XI A5 FW_XI
XO B5 FW_XO

197S0030 3.2MMX2.5MM
CRITICAL
Y4403
SM-3.2X2.5MM
24.576MHZ

R4400 390 5% 1/16W MF-LF 402

C4411 15PF 5% 50V CERM 402
C4412 15PF 5% 50V CERM 402

NEED TO CHECK CRYSTAL LOAD CAPACITANCE

RESET* B4 FW_PWRON_RST_L

R1 A6 FW_R1
R0 B7 FW_R0

R4452 2.1K 1% 1/16W MF-LF 402
C4420 0.1UF 10% 10V X5R 402
R4420 510K 5% 1/10W MF-LF 402

SPEC RECOMMENDS 2.49K

TPBIAS0 B8 39 FW_A_TPBIAS
TPA0_P A9 39 FW_A_TPA_P
TPA0_N B9 39 FW_A_TPA_N
TPB0_P B10 39 FW_A_TPB_P
TPB0_N A10 39 FW_A_TPB_N
TPBIAS1 D8 6 FW_B_TPBIAS
TPA1_P A11 6 FW_B_TPA_P
TPA1_N B11 6 FW_B_TPA_N
TPB1_P B12 6 FW_B_TPB_P
TPB1_N A12 6 FW_B_TPB_N
TPBIAS2 C13 6 FW_C_TPBIAS
TPA2_P C11 6 FW_C_TPA_P
TPA2_N C12 6 FW_C_TPA_N
TPB2_P D13 6 FW_C_TPB_P
TPB2_N D12 6 FW_C_TPB_N

MODE_420 M5
MODE_A B6

MODE FOR EXTERNAL LINK

PC0 E12 39 FW_PC0
PC1 F13
PC2 F12

DUAL PORT DEVICES ARE POWER CLASS 4 (’100’)
SINGLE PORT DEVICES ARE POWER CLASS 0 (’000’)

CONTENDER G12 LOW = NOT BUS MANAGER
CARDBUSN B1 LOW = PCI OPERATION
MPCI_ACTN_323 E10

MANUFACTURING TEST PINS
TEST0 C2
TEST1 C1
PTEST A4
SE A3
SM B3

FIREWIRE CONTROLLER

SYNC_MASTER=ENET SYNC_DATE=08/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 44 OF 108	

WWW.AliSaler.Com

Page Notes

INPUT:

=PPBUS_FW - PORT POWER

=PP3V3_S5_FW - DIGITAL POWER

=GND_CHASSIS_FW_PORT0 - CHASSIS GROUND

=FWPWR_PWRON - ADDITIONAL POWER CONTROL

INPUT/OUTPUT:

FW_TPA0_P/N,FW_TPB0_P/N,FW_TPBIAS0 - FIREWIRE DIFF PAIRS

OUTPUT:

FW_PC0 - POWER CLASS IDENTIFIER (SINGLE PORT - TIE LOW)

PAGE HISTORY

5/19/05 - INITIAL REVISION
6/22/05 - CHANGED DIFF PAIR NAMES TO MATCH REUSE
6/22/05 - REMOVED CONSTRAINTS BECAUSE USING ALLEGRO CONST MANAGER
6/22/05 - CONNECTED FW_PC0 FOR SINGLE PORT
7/26/05 - UPDATED LATE-VG POWER RAIL CIRCUIT FROM M1
7/26/05 - CHANGED CONNECTOR PORT NAMING TO PORT0
7/26/05 - SWITCHED TO 514-0124 FOR PRE-PROTO CONNECTOR
7/26/05 - REMOVED R4520 - IT HASN'T BEEN STUFFED FOR MANY PRODUCTS
7/26/05 - CHANGED FL4590 TO 1.1A VERSION
7/26/05 - REMOVED ETHERNET LOW-POWER MODE CIRCUIT
7/26/05 - UPDATED SIGNAL NAMES FOR FW PORT POWER ENABLE

1394b implementation based on Apple
FireWire Design Guide (FWDG 0.6, 5/14/03)

PORT POWER CLASS

0 FOR SINGLE PORT

1 FOR DUAL PORT

38 OUT FW_PC0

PPBUS_S5_FWPWRSW_F
VOLTAGE=18.5V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM

64 =PPBUS_S5_FWPWRSW

FL4590
1.1A-24V
MINISMDC

Q4590
FDC638P
SM-LF

PPFW_SWITCH 5
VOLTAGE=18V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM

D4590
SMB
B340LBXF

64 =PP3V3_S0_FW

R4590 470K 5% 1/16W MF-LF 402

C4590 0.01uF 10% 16V CERM 402

FWPWR_EN_L_DIV
MIN_LINE_WIDTH=0.05MM
MIN_NECK_WIDTH=0.05MM

R4593 100K 5% 1/16W MF-LF 402

R4591 330K 5% 1/16W MF-LF 402

D4591 BAS16TW-X-F SOT-363

FWPWR_RUN

IF =FWPWR_PWRON IS NC:
ENABLES PORT POWER WHEN MACHINE IS RUNNING OR ON AC
IF =FWPWR_PWRON LOW WHEN OFF:
ENABLES PORT POWER WHEN MACHINE IS RUNNING OR ON AC AND NOT SHUTDOWN

6 =FWPWR_PWRON

FWPWR_EN_L 60
MIN_LINE_WIDTH=0.05MM
MIN_NECK_WIDTH=0.05MM

Q4591
2N7002
SOT23-LF

FWPWR_EN

65 46 45 5 SMC_PS_ON

R4594 10K 5% 1/16W MF-LF 402

FWPWR_ACIN

R4595 470K 5% 1/16W MF-LF 402

Enables port power whenever
machine AC Adapter is plugged
or system at run state with battery only

Cable Power

PPFW_PORT0_VP_F
VOLTAGE=16.5V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM

L4510 FERR-250-OHM SM

PPFW_PORT0_VP
VOLTAGE=16.5V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM

C4510 0.001uF 10% 50V CERM 402

"Snapback" & "Late VG" Protection

[LATE VG NOTES]
CURRENT THROUGH THE BIAS RESISTOR SHOULD BE 5MA FOR A VOLTAGE DROP TO 2.2V
IT IS 2.2V INSTEAD OF 2.7V BECAUSE THE SNAPBACK ESD DIODES HAVE A 0.5V DROP

IO 38 FW_A_TPBIAS

R4500 56.2 1% 1/16W MF-LF 402

R4501 56.2 1% 1/16W MF-LF 402

C4500 0.33UF 10% 6.3V CERM-X5R 402

IO 38 FW_A_TPA_P
IO 38 FW_A_TPA_N
IO 38 FW_A_TPB_P
IO 38 FW_A_TPB_N

R4502 56.2 1% 1/16W MF-LF 402

R4503 56.2 1% 1/16W MF-LF 402

FW_PORT0_TPB

C4501 220PF 5% 25V CERM 402

R4504 4.99K 1% 1/16W MF-LF 402

39 PP3V3_S5_FWLATEVG

C4520 0.01UF 10% 16V CERM 402

D4520 BAV99DW-X-F SOT-363

C4521 0.01UF 10% 16V CERM 402

D4520 BAV99DW-X-F SOT-363

FW_PORT0_TPA_P

FW_PORT0_TPA_N

FW_PORT0_TPB_P

FW_PORT0_TPB_N

120-OHM 2012 SYM_VER-2

FL4520

120-OHM 2012 SYM_VER-2

FL4521

D4521 BAV99DW-X-F SOT-363

C4522 0.01UF 10% 16V CERM 402

D4521 BAV99DW-X-F SOT-363

C4523 0.01UF 10% 16V CERM 402

FW_PORT0_TPA_P_FL
FW_PORT0_TPA_N_FL
FW_PORT0_TPB_P_FL
FW_PORT0_TPB_N_FL
(PPFW_PORT0_VP)
(GND_FW_PORT0_VGND)

C4524 0.01UF 10% 50V X7R 603-1

C4525 0.01uF 10% 16V CERM 402

PORT 0
1394A
OMIT
CRITICAL
J4500
1394A
F-RT-TH1

TPO (TPA+)
TPO# (TPA-)
TPI (TPB+)
TPI# (TPB-)
VP
VGND

=GND_CHASSIS_FW_UPPER 6

Plexi: 514-0124
Enclosure: 514-0289

=GND_CHASSIS_FW_DOWN 6

LATE-VG PROTECTION POWER

64 =PP3V3_S5_FWLATEVG

R4550 330 5% 1/16W MF-LF 402

PP3V3_S5_FWLATEVG_F
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.35MM
MIN_NECK_WIDTH=0.25MM

L4550 400-OHM-EMI SM-1

PP3V3_S5_FWLATEVG 39
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.35MM
MIN_NECK_WIDTH=0.25MM

NO STUFF C4551 0.1uF 20% 16V CERM 402

NO STUFF C4552 0.001uF 10% 50V CERM 402

D4550 SOT23 MMBZ5227B

CAPS MAY NOT BE NECESSARY.
NO STUFF FOR NOW THOUGH

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
514-0359	1	CONN,6P 1394A RCPT,MIDPLANE,MG3,LF	J4500	CRITICAL	NORMAL
514-0316	1	CONN,6P 1394A RCPT,MIDPLANE,BLACK,LF	J4500	CRITICAL	FANCY

FIREWIRE PORT

SYNC_MASTER=ENET SYNC_DATE=11/16/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 45 OF 108	

WWW.AliSaler.Com

GEYSER AND DIMM0 REMOTE TEMP SENSORS

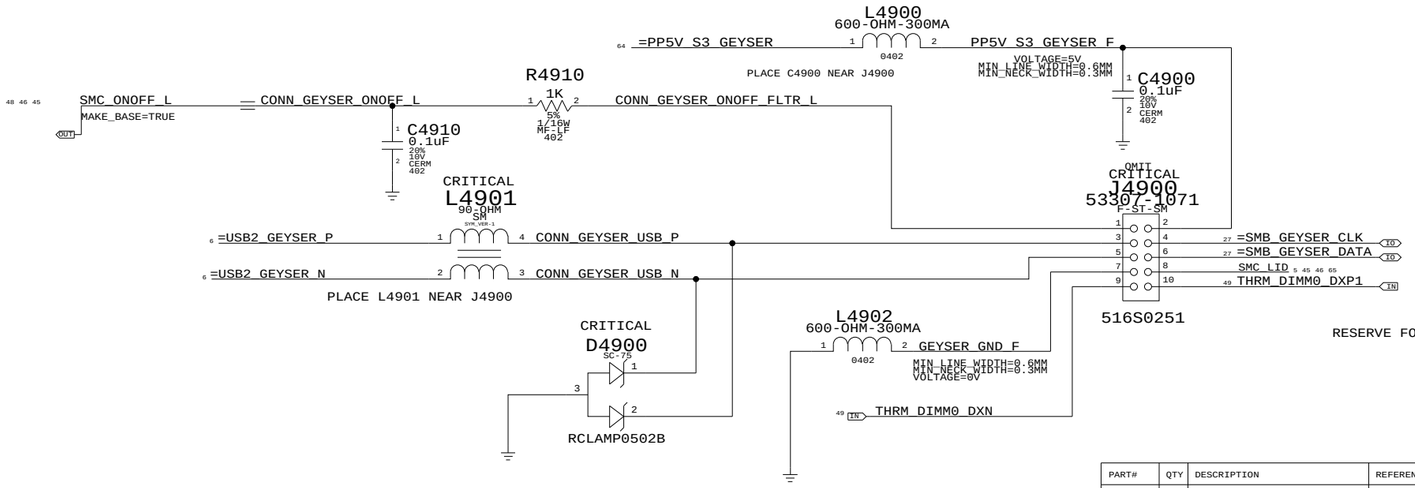

RESERVE FOR POSSUM BUILD DEBUG USE

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
516S0482	1	ACES 88646-1071-NS	J4900	CRITICAL	NORMAL
516S0482	1	ACES 88646-1071-NS	J4900	CRITICAL	FANCY

CONNECTOR MISC

SYNC_MASTER=ENET SYNC_DATE=11/16/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE SHT 49 OF 108

WWW.AliSaler.Com

PLACE C5100 AND C5101
NEAR U5100 PIN 22 AND 49

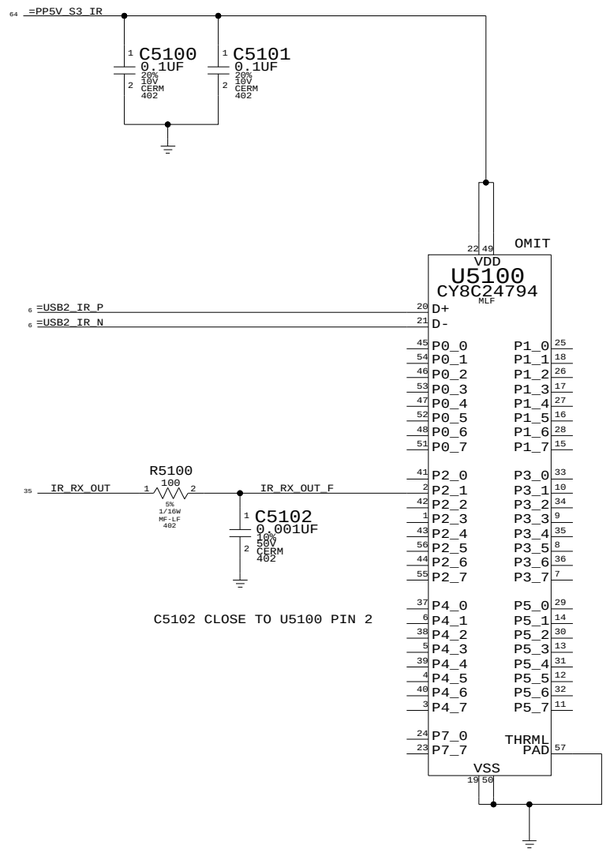

C5102 CLOSE TO U5100 PIN 2

IR CONTROLLER

SYNC_MASTER=ENET SYNC_DATE=11/09/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	51	108

WWW.AliSaler.Com

USB 2.0 CONNECTORS

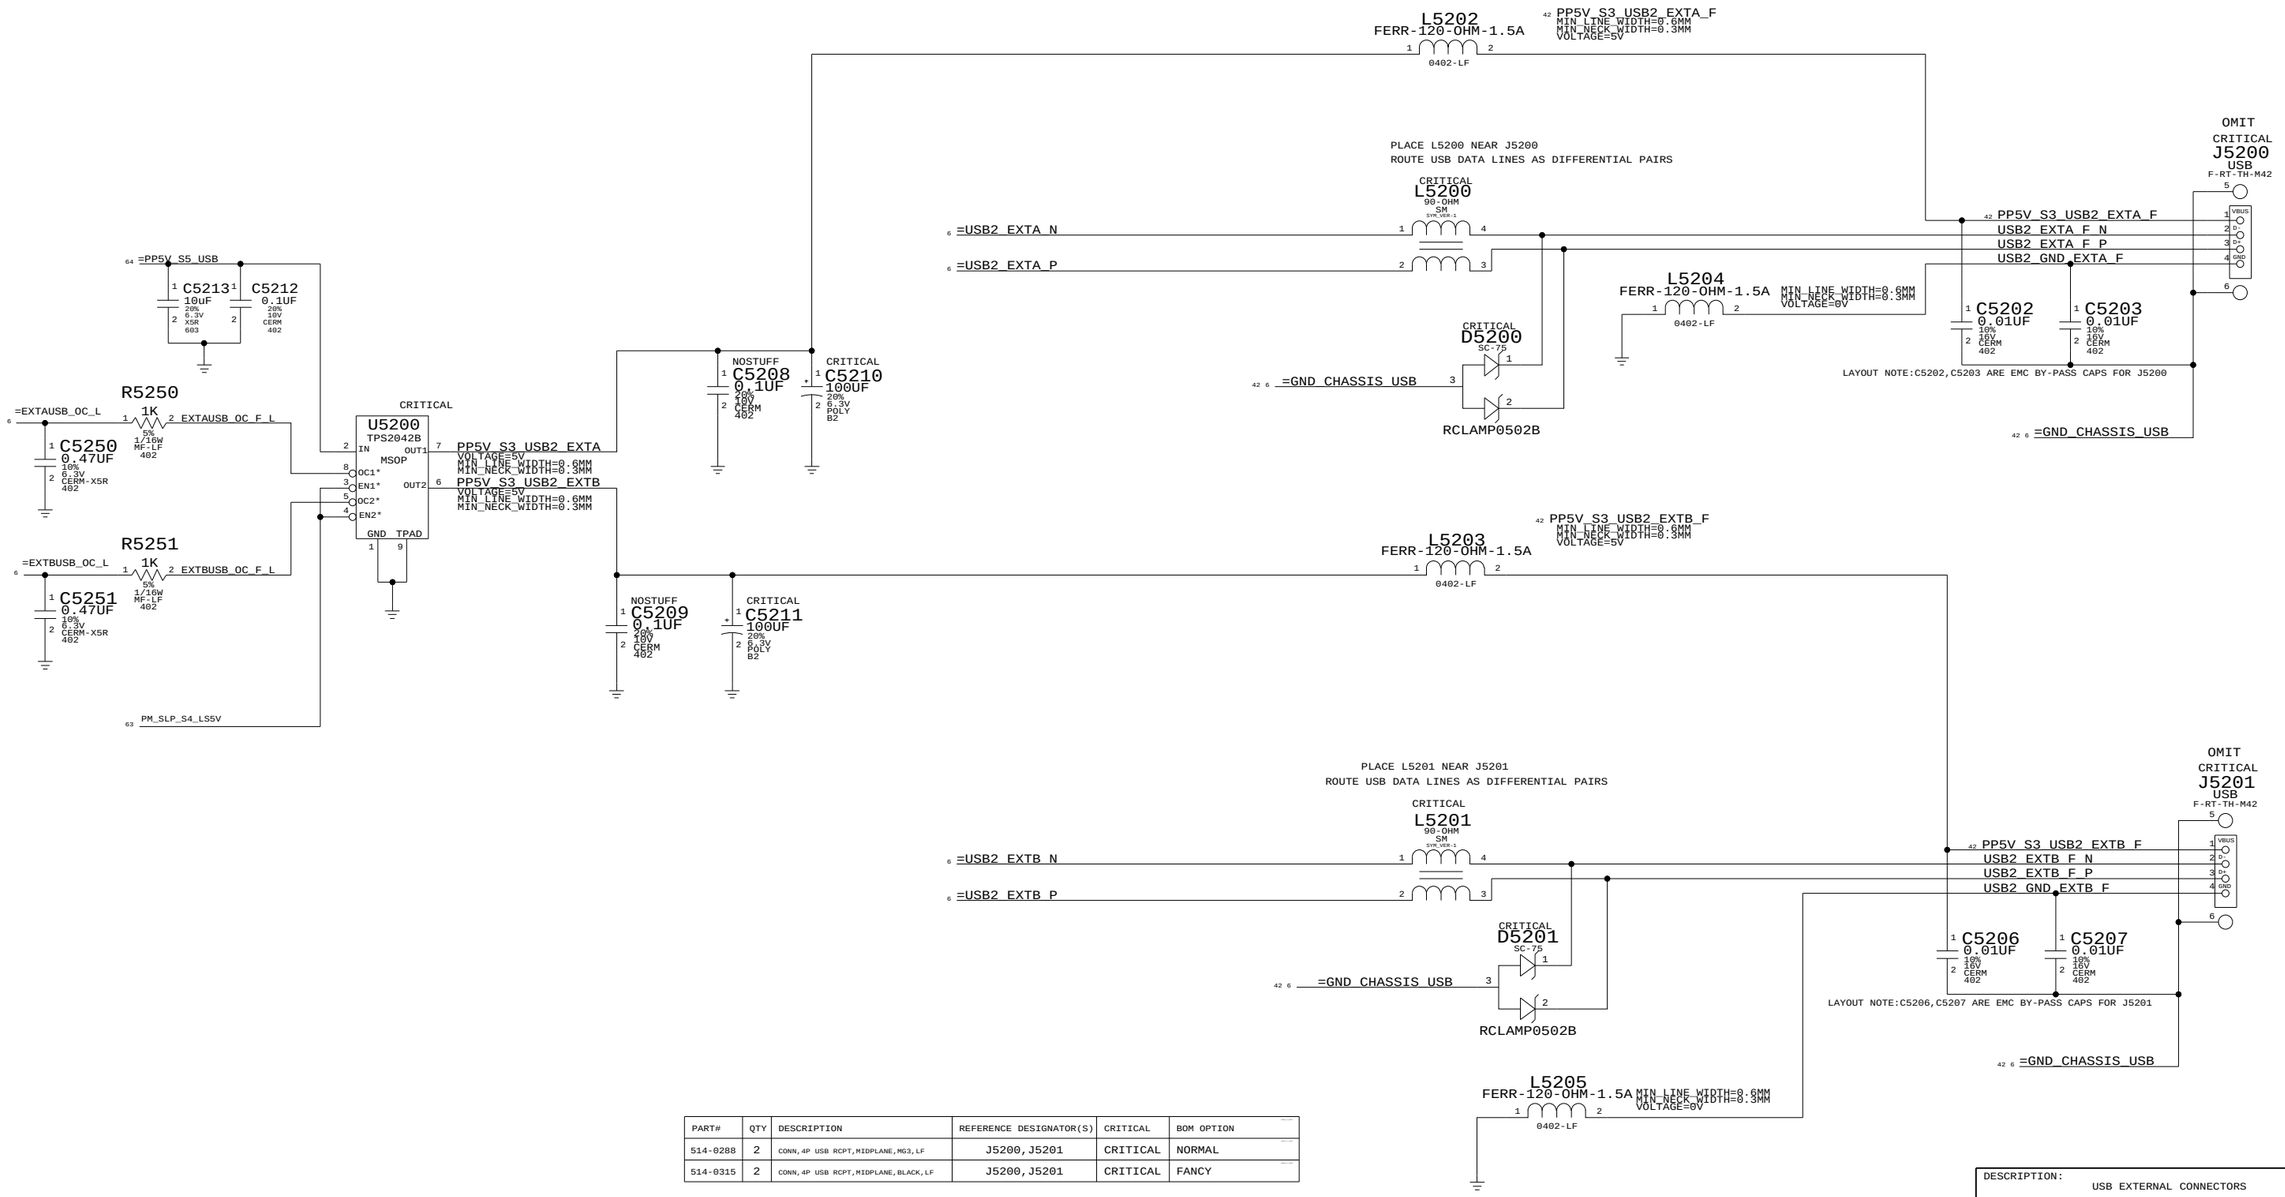

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
514-0288	2	CONN,4P USB RCPT,MIDPLANE,MG3,LF	J5200,J5201	CRITICAL	NORMAL
514-0315	2	CONN,4P USB RCPT,MIDPLANE,BLACK,LF	J5200,J5201	CRITICAL	FANCY

DESCRIPTION:
USB EXTERNAL CONNECTORS

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 52 OF 108	

WWW.AliSaler.Com

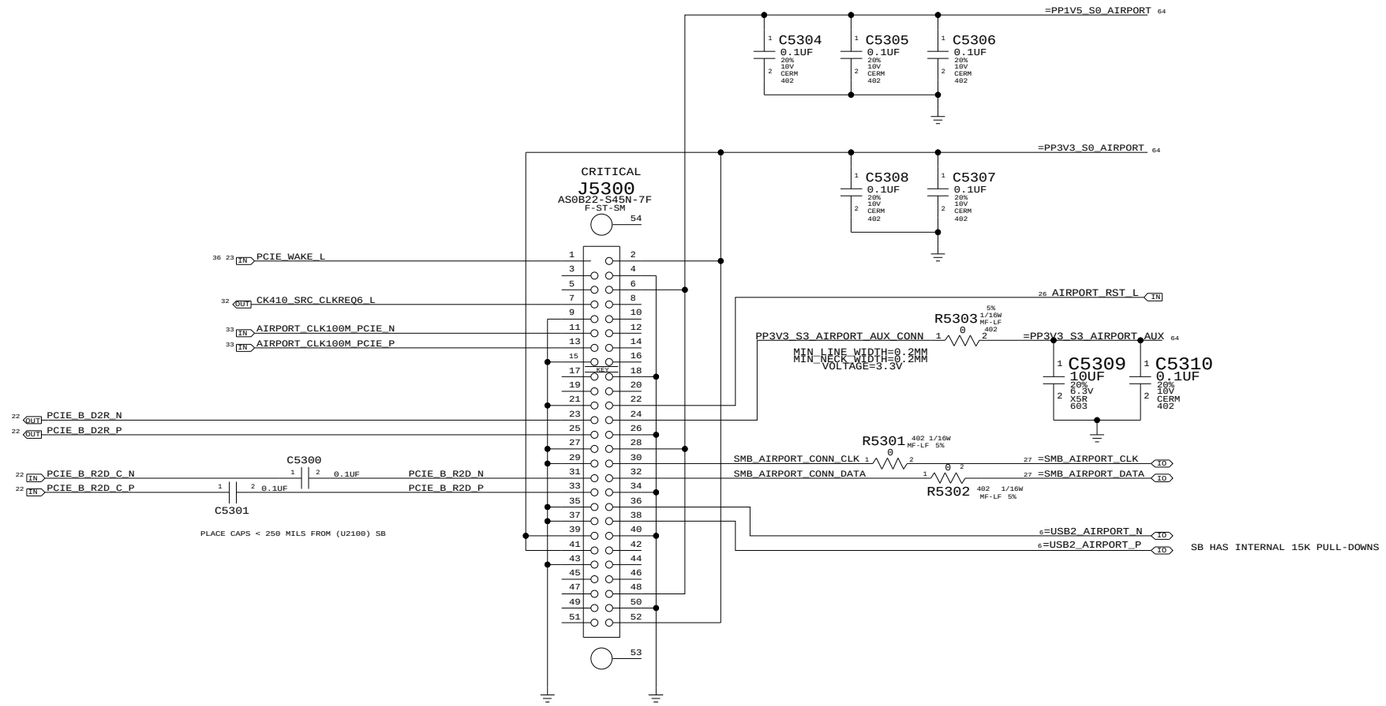

AIRPORT CONN

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	53	108

WWW.AliSaler.Com

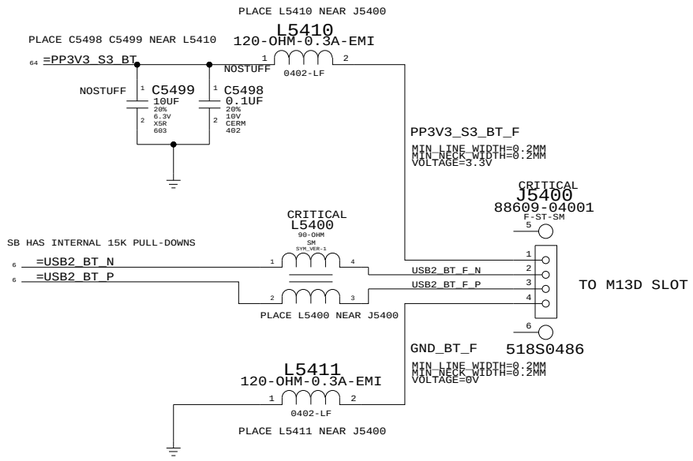

BLUETOOTH INTERFACE

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 54 OF 108	

WWW.AliSaler.Com

OMIT

U5800
SMC_H8S2116
BGA
(1 OF 4)

23 OUT	PM_LAN_ENABLE	B12	P10	P60/KIN0*	L13	63 SMC_PM_G2_EN OUT
26 OUT	SMC_RSTGATE_L	C13	P11	P61/KIN1*	L14	65 46 39 5 SMC_PS_ON (Enable AC adapter PWR) OUT
63 26 5 IN	ALL_SYS_PWRGD	A15	P12	P62/KIN2*	L15	22 SPI_ARB OUT
59 46 IN	RSMRST_PWRGD	B14	P13	P63/KIN3*	K12	50 22 SPI_SCLK OUT
23 OUT	SMC_SB_NMI	B15	P14	P64/KIN4*	K13	50 22 SPI_SI OUT
23 OUT	PM_RSMRST_L	C14	P15	P65/KIN5*	K14	50 22 SPI_SO IN
58 OUT	IMVP_VR_ON	D12	P16	P66/IRQ6*/KIN6*	J12	46 SMC_PROCHOT_3_3_L IN
23 OUT	PM_PWRBTN_L	C15	P17	P67/IRQ7*/KIN7*	J13	6 SMC_CPU_INIT_3_3_L IN
46	SMC_P20	D13	P20	P70/AN0	N12	48 SMC_CPU_ISENSE IN
46	SMC_P21	D14	P21	P71/AN1	R13	48 5 SMC_CPU_VSENSE IN
46	SMC_P22	D15	P22	P72/AN2	P13	46 SMC_GPU_ISENSE IN
46	SMC_P23	E12	P23	P73/AN3	R14	46 SMC_GPU_VSENSE IN
66 46 5 OUT	SMC_BATT_TRICKLE_EN_L	E14	P24	P74/AN4	P14	66 SMC_DCIN_ISENSE IN
66 46 5 OUT	SMC_BATT_CHG_EN	E15	P25	P75/AN5	R15	48 SMC_PBUS_VSENSE IN
46	SMC_P26	E13	P26	P76/AN6	N13	66 SMC_BATT_ISENSE IN
46	SMC_P27	F14	P27	P77/AN7	P15	46 SMC_FWIRE_ISENSE IN
53 47 21 5 IO	LPC_AD<0>	D9	P30/LAD0	P80/PME*	C7	23 SMC_WAKE_SCI_L OUT
53 47 21 5 IO	LPC_AD<1>	C9	P31/LAD1	P81/GA20	A7	46 SMC_TPM_GPIO IO
53 47 21 5 IO	LPC_AD<2>	A9	P32/LAD2	P82/CLKRUN*	B7	53 47 38 23 5 PM_CLKRUN_L IO
53 47 21 5 IO	LPC_AD<3>	B9	P33/LAD3	P83/LPCPD*	D6	53 47 46 23 5 PM_SUS_STAT_L IN
53 47 21 5 IN	LPC_FRAME_L	D8	P34/LFRAME*	P84/IRQ3*/TXD1	C6	46 SC_TX_L (Serial Port Transmit) IO
26 IN	SMC_LRESET_L	C8	P35/LRESET*	P85/IRQ4*/RXD1	A6	46 SC_RX_L (Serial Port Receive) IO
33 IN	PCI_CLK_SMC	A8	P36/LCLK	P86/IRQ5*/SCK1/SCL1	B6	27 SMB_BSB_CLK (BAT B SMBUS CLK) IO
53 47 23 5 OUT	INT_SERIRQ	D7	P37/SERIRQ	P90/IRQ2*	K4	48 46 40 SMC_ONOFF_L IN
OUT	SMC_DISPLAY_ENABLE	A5	P40/TMIO	P91/IRQ1*	J2	66 65 46 5 SMC_BC_ACOK (AC I/P detect) IN
46 OUT	SMC_SYS_LED_16B	B5	P41/TMO0	P92/IRQ0*	J1	65 46 5 SMC_BS_ALRT_L IN
27 IO	SMB_BSB_DATA (BAT B SMBUS DATA)	D5	P42/SDA1	P93/IRQ12*	J3	63 23 PM_SLP_S3_L IN
53 OUT	SMC_TPM_PP (TPM physical presence)	C3	P43/TMI1/EXSCK1	P94/IRQ13*	J4	63 61 60 23 PM_SLP_S4_L IN
46	SMC_P44	B1	P44/TMO1	P95/IRQ14*	H2	46 23 PM_SLP_S5_L IN
OUT	SMC_BKLIGHT_ENABLE	C2	P45	P96/EXCL	H1	46 SMC_SUS_CLK IN
46	SMC_P46	D3	P46/PWX0/PWM0	P97/IRQ15*/SDA0	G2	27 SMB_0_DATA IO
47 46 5 OUT	SMC_TX_L (Debug feature,16550 Transmit)	G1	P50			
47 46 5 IN	SMC_RX_L (Debug feature,16550 Receive)	G4	P51			
27 IO	SMB_0_CLK	F2	P52/SCL0			

OMIT

U5800
SMC_H8S2116
BGA
(2 OF 4)

21 IO	SMC_RCIN_L	R3	PA0/KIN8*/PA2DC	PE0	M3	SMC_CASE_OPEN (CASE OPEN/CLOSE DETECT) 46
47 22 5 IN	BOOT_LPC_SPI_L	P3	PA1/KIN9*/PA2DD	PE1*/ETCK	M2	47 46 5 SMC_TCK IN
26 23 IN	PM_SYSRST_L	R2	PA2/KIN10*/PS2AC	PE2*/ETDI	M1	47 46 5 SMC_TDI IN
53 46 OUT	SMC_TPM_RESET_L	N3	PA3/KIN11*/PS2AD	PE3*/ETDO	L4	47 46 5 SMC_TDO OUT
14 6 IN	PM_EXTTS_L<0>	R1	PA4/KIN12*/PS2BC	PE4*/ETMS	L2	47 46 5 SMC_TMS IN
23 IO	PM_THRM_L	N2	PA5/KIN13*/PS2BD	PF0/IRQ8*/PWM2	M7	SMC_DISP_BKLT_B 46
65 46 5 IO	SYS_ONEWIRE	M4	PA6/KIN14*/PS2CC	PF1/IRQ9*/PWM3	P6	SMC_DISP_BKLT_A OUT
23 OUT	PM_BATLOW_L	N1	PA7/KIN15*/PS2CD	PF2/IRQ10*/TMOY	R6	65 46 40 5 SMC_LID (LID OPEN/CLOSE SW) IN
23 IN	SMC_EXTSMI_L	B10	PB0/LSMI*	PF3/IRQ11*/TMOX	N6	46 SMC_CPU_RESET_3_3_L IN
23 OUT	SMC_RUNTIME_SCI_L	A10	PB1/LSCI	PF4/PWM4	M6	66 5 SMC_BATT_ISET OUT
34 IN	SMC_ODD_DETECT (Optical Disk Insert detect)	D10	PB2	PF5/PWM5	R5	SMC_BATT_VSET 46
48 OUT	ISENSE_CAL_EN	A11	PB3	PF6/PWM6	P5	66 SMC_SYS_ISET OUT
46	SMC_EXCARD_CP	B11	PB4	PF7/PWM7	N5	SMC_SYS_VSET 46
46	SMC_EXCARD_PWR_EN	C11	PB5	PG0/EXIRQ8*/TMIX	P9	50 22 SPI_CE_L IO
46	SMC_EXCARD_PWR_OC_L	A12	PB6	PG1/EXIRQ9*/TMIY	R9	SMC_PG1 46
46	SMC_PB7	D11	PB7	PG2/EXIRQ10*/SDA2	N9	27 SMB_BSA_DATA IO
46	SMC_FAN_0_CTL	G14	PC0/TIOCA0/WUE8*	PG3/EXIRQ11*/SCL2	P8	27 SMB_BSA_CLK IO
51 5 OUT	SMC_FAN_1_CTL	G15	PC1/TIOCB0/WUE9*	PG4/EXIRQ12*/EXSDAA	R8	27 SMB_RMT_DATA IO
46	SMC_FAN_2_CTL	G13	PC2/TIOCC0/TCLKA/WUE10*	PG5/EXIRQ13*/EXSCLA	M8	27 SMB_RMT_CLK IO
46	SMC_FAN_3_CTL	G12	PC3/TIOCD0/TCLKB/WUE11*	PG6/EXIRQ14*/EXSDAB	P7	27 SMB_MLB_DATA IO
46	SMC_FAN_0_TACH	H14	PC4/TIOCA1/WUE12*	PG7/EXIRQ15*/EXSCLB	R7	27 SMB_MLB_CLK IO
51 5 IN	SMC_FAN_1_TACH	H15	PC5/TIOCB1/TCLKC/WUE13*	PH0/EXIRQ6*	E1	46 SMC_PROCHOT OUT
46	SMC_FAN_2_TACH	H13	PC6/TIOCA2/WUE14*	PH1/EXIRQ7*	F3	46 SMC_THRMTRIP OUT
46 5	SMC_FAN_3_TACH	H12	PC7/TIOCB2/TCLKD/WUE15*	PH2/FWE	K2	SMC_FWE 46
52 IN	SMS_X_AXIS	M11	PD0/AN8	PH3/EXEXCL	C4	ALS_GAIN 46
52 IN	SMS_Y_AXIS	P11	PD1/AN9	PH4	D4	46 23 SMS_INT_L OUT
52 IN	SMS_Z_AXIS	R11	PD2/AN10	PH5	B3	52 SMS_ONOFF_L OUT
46	SMC_PD3 (ANALOG_ID)	N11	PD3/AN11			
62 46	SMC_NB_ISENSE	P10	PD4/AN12			
61 46	SMC_MEM_ISENSE	R10	PD5/AN13			
46 5	ALS_LEFT	N10	PD6/AN14			
46	ALS_RIGHT	M10	PD7/AN15			

OMIT

U5800
SMC_H8S2116
BGA
(4 OF 4)

NC	G3	NC0	NC12	F15	NC
NC	H3	NC1	NC13	A14	NC
NC	K3	NC2	NC14	C12	NC
NC	L3	NC3	NC15	C10	NC
NC	N4	NC4	NC16	C5	NC
NC	M5	NC5	NC17	A3	NC
NC	N7	NC6	NC18	B8	NC
NC	M12	NC7	NC19	E4	NC
NC	M13	NC8	NC20	H4	NC
NC	L12	NC9	NC21	M9	NC
NC	K15	NC10	NC22	N8	NC
NC	J14	NC11			

64 48 46 45 =PP3V42_G3H_SMC

CRITICAL
C5802 22UF 20% 6.3V CERM-X5R 805
C5803 0.1UF 20% 10V CERM 402
C5804 0.1UF 20% 10V CERM 402
C5805 0.1UF 20% 10V CERM 402
C5806 0.1UF 20% 10V CERM 402

LAYOUT NOTE:
PLACE R5899, C5820 NEAR SMC PIN N14, N15

(VCL IS INTERNAL RAIL)
SMC_VCL

64 48 46 45 =PP3V42_G3H_SMC

R5899 4.7 5% 1/16W MF-LF 402

C5807 0.47UF 10% 6.3V CERM-X5R 402

LAYOUT NOTE:
PLACE C5807 NEAR PIN F1

64 48 46 45 =PP3V42_G3H_SMC

R5809 10K 5% 1/16W MF-LF 402

R5801 10K 5% 1/16W MF-LF 402

PP3V3_AVREF_SMC 46

SMC_AVCC_RC

C5820 0.1UF 20% 10V CERM 402

47 5 SMC_MD1 (Should PD) (To debug card for mode select)
KBC_MDE (Should PU)

R5802 10K 5% 1/16W MF-LF 402

R5803 0 5% 1/16W MF-LF 402

NOSTUFF

66 62 61 48 46 45 GND_SMC_AVSS

47 46 5 IN SMC_RST_L

46 SMC_XTAL

46 SMC_EXTAL

OMIT

U5800
SMC_H8S2116
BGA
(3 OF 4)

AVCC N14, AVCC N15, VCC P2, VCC P1, VCC J15, VCC A1, VCC F1, VCL M14, AVREF M15, AVREF

MD1 E2
MD2 K1
RES* E3
XTAL A2
EXTAL B2
NMI F4 (Should PD) (To debug card for mode select) 47 5 SMC_NMI IN
ETRST* L1 47 5 SMC_TRST_L IN
AVSS P12, R12
VSS D1, F4, R4, F12, F13, B13, A13, A4, B4, D2

R5898 10K 5% 1/16W MF-LF 402

XW5800 SM 1 2

GND_SMC_AVSS 45 46 48 61 62 66

SMC

SYNC_MASTER=SMC SYNC_DATE=08/18/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE NONE	SHT 58 OF 108	

WWW.AliSaler.Com

SMC Reset Button / Brownout Detect

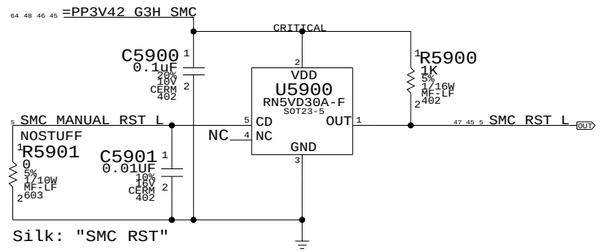

Debug Power Button



SMC Crystal Circuit



Is this the best part to use?

SMC AVREF Supply

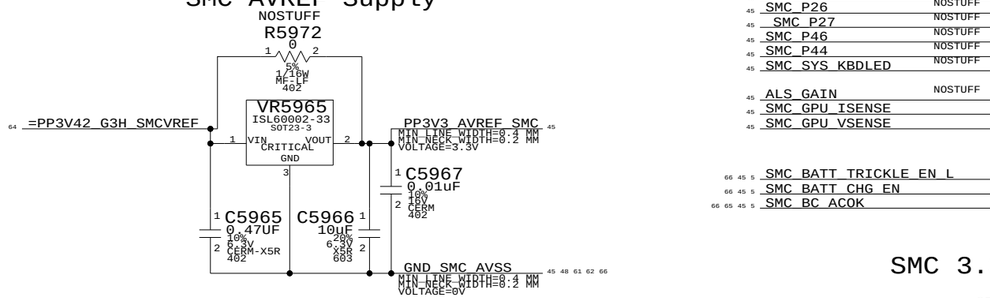

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
353S1278	353S1381	?	VR5965	TI REF3133

SMC G3HOT OSCILLATOR

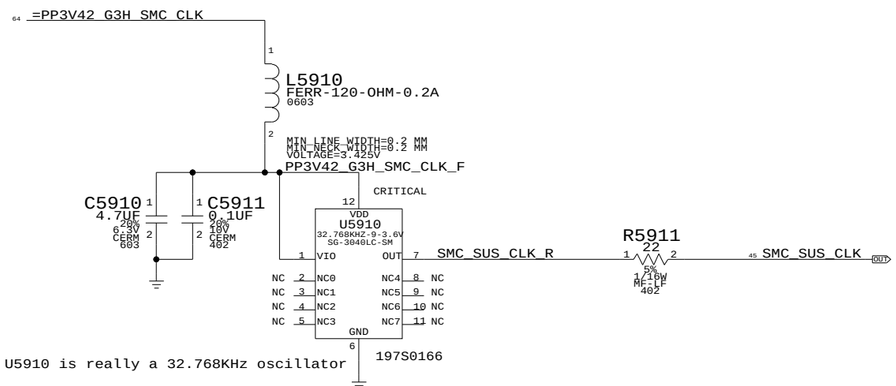

U5910 is really a 32.768KHz oscillator

THESE NEED TO BE PULLED TO THE PROPER RAIL:

SMS_INT_L
SMC_TPM_RESET_L

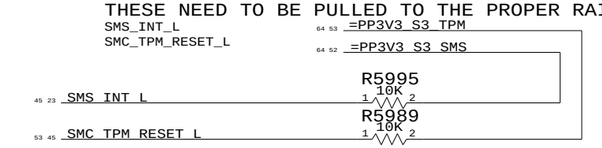

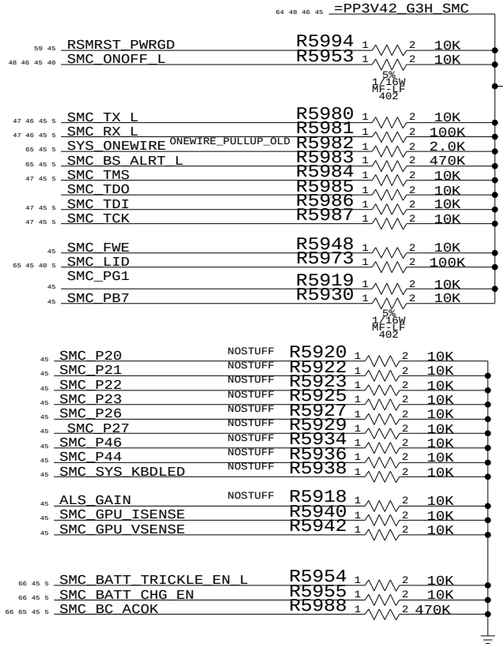

SMC 3.3V to 1.05V Level Shifting

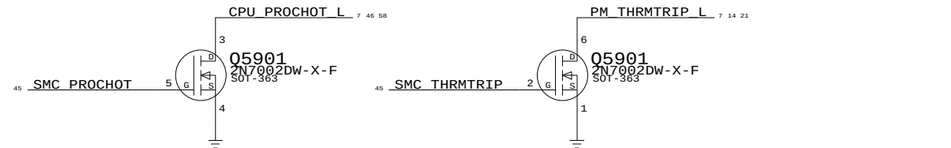

SMC 1.05V to 3.3V Level Shifting

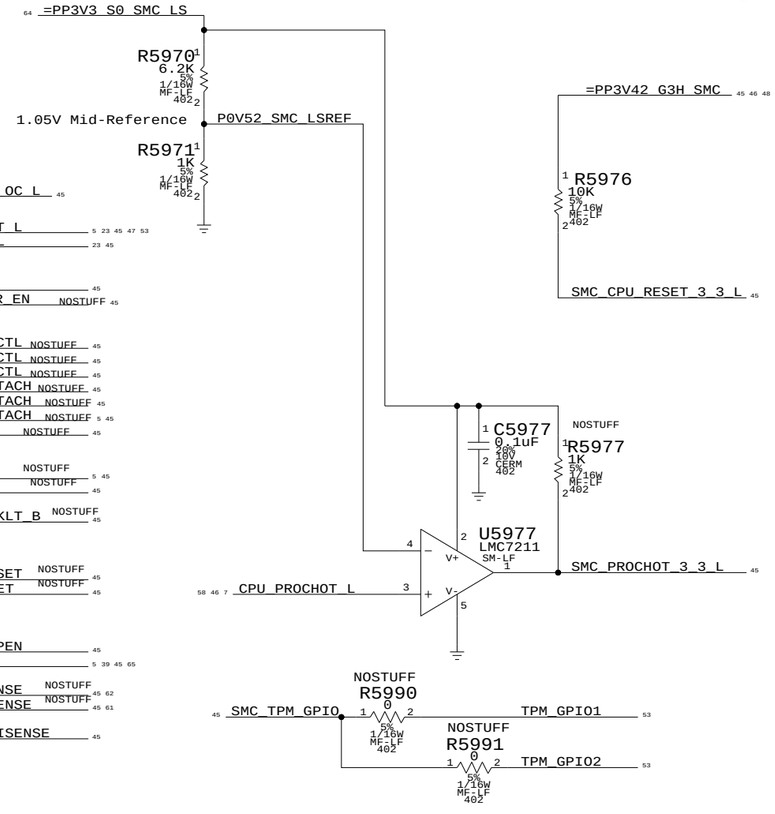

Stuff R5992, R5993 for development only

System (Sleep) LED Circuit

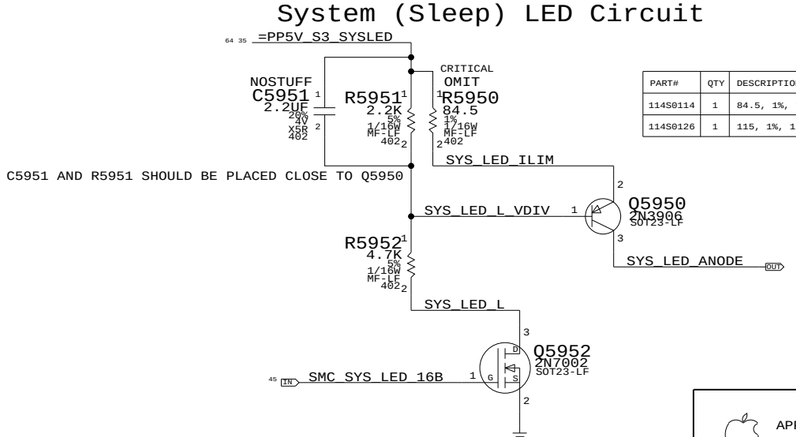

C5951 AND R5951 SHOULD BE PLACED CLOSE TO Q5950

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
114S0114	1	84.5, 1%, 1/16W, MF-LF, 402	R5950	NORMAL
114S0126	1	115, 1%, 1/16W, MF-LF, 402	R5950	FANCY

SMC SUPPORT

SYNC_MASTER=SMC SYNC_DATE=08/23/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	59	108

WWW.AliSaler.Com

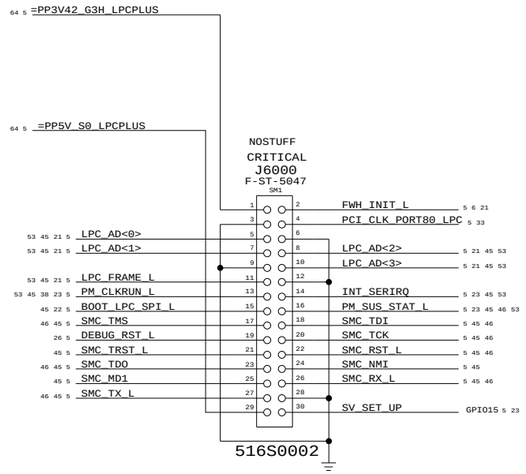
64 5 =PP3V42_G3H_LPCPLUS
64 5 =PP5V_S0_LPCPLUS
NOSTUFF
CRITICAL
J6000
F-ST-5047
SM1
1 2 FWH_INIT_L 5 6 21
3 4 PCI_CLK_PORT80_LPC 5 33
5 6
7 8 LPC_AD<2> 5 21 45 53
9 10 LPC_AD<3> 5 21 45 53
11 12
13 14 INT_SERIRQ 5 23 45 53
15 16 PM_SUS_STAT_L 5 23 45 46 53
17 18 SMC_TDI 5 45 46
19 20 SMC_TCK 5 45 46
21 22 SMC_RST_L 5 45 46
23 24 SMC_NMI 5 45
25 26 SMC_RX_L 5 45 46
27 28
29 30 SV_SET_UP GPIO15 5 23
53 45 21 5 LPC_AD<0>
53 45 21 5 LPC_AD<1>
53 45 21 5 LPC_FRAME_L
53 45 38 23 5 PM_CLKRUN_L
45 22 5 BOOT_LPC_SPI_L
46 45 5 SMC_TMS
26 5 DEBUG_RST_L
45 5 SMC_TRST_L
46 45 5 SMC_TDO
45 5 SMC_MD1
46 45 5 SMC_TX_L
516S0002

LPC+ Debug Connector

SYNC_MASTER=NB SYNC_DATE=06/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	60	108

WWW.AliSaler.Com

PROCESSOR DCIN VOLTAGE SENSE

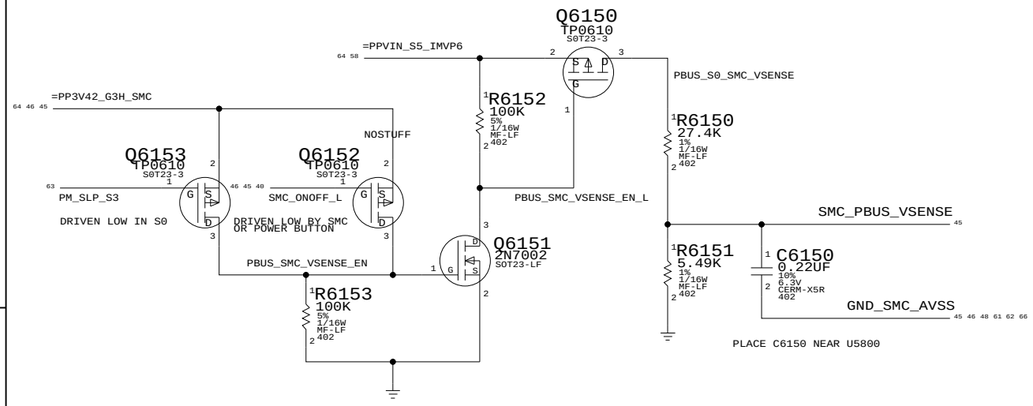

CPU CURRENT SENSE

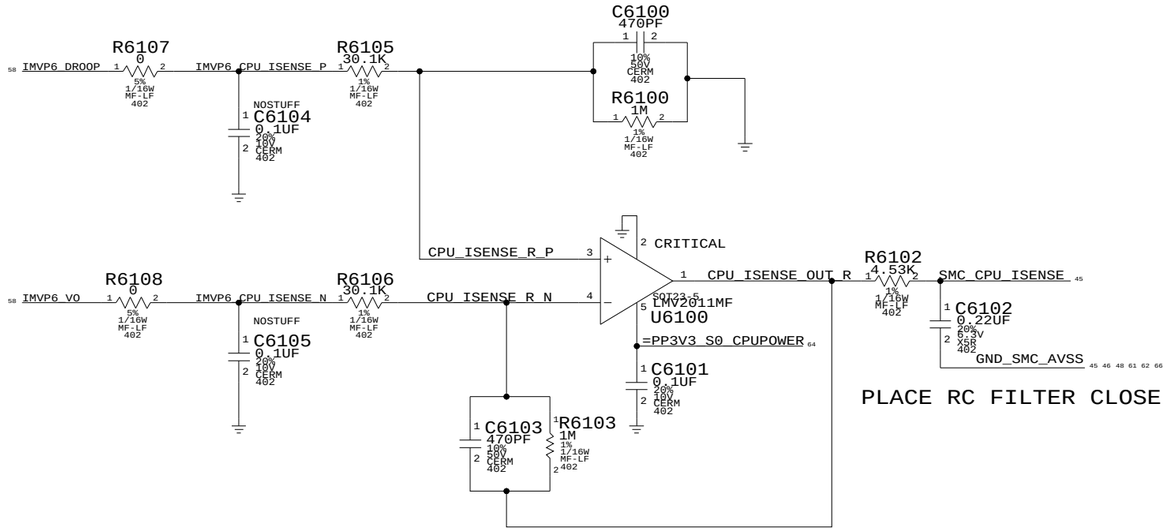

PLACE RC FILTER CLOSE TO SMC

Current Sense Calibration Circuit

Switches in fixed load on power supplies to calibrate current sense circuits

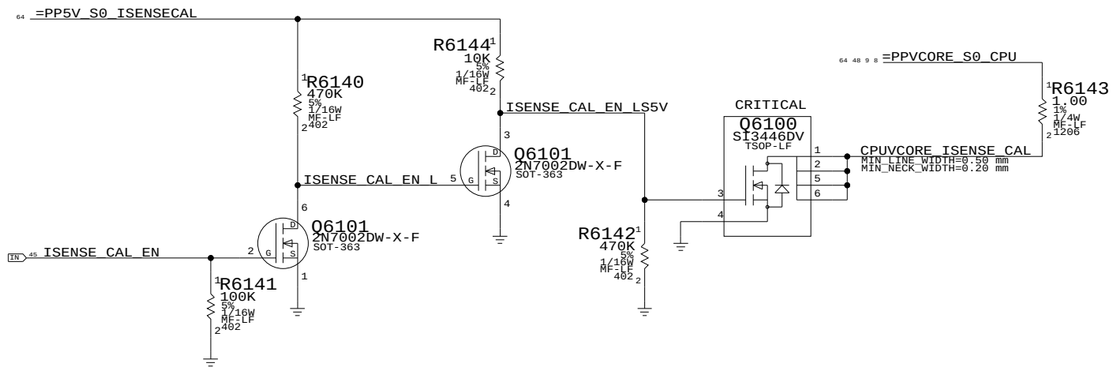

CPU VOLTAGE SENSE

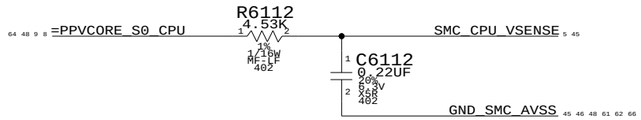

PLACE RC FILTER CLOSE TO SMC

CPU Current & Voltage Sense

SYNC_MASTER=ENET SYNC_DATE=08/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 61 OF 108	

WWW.AliSaler.Com

DIMM0 TEMPERATURE ZONE

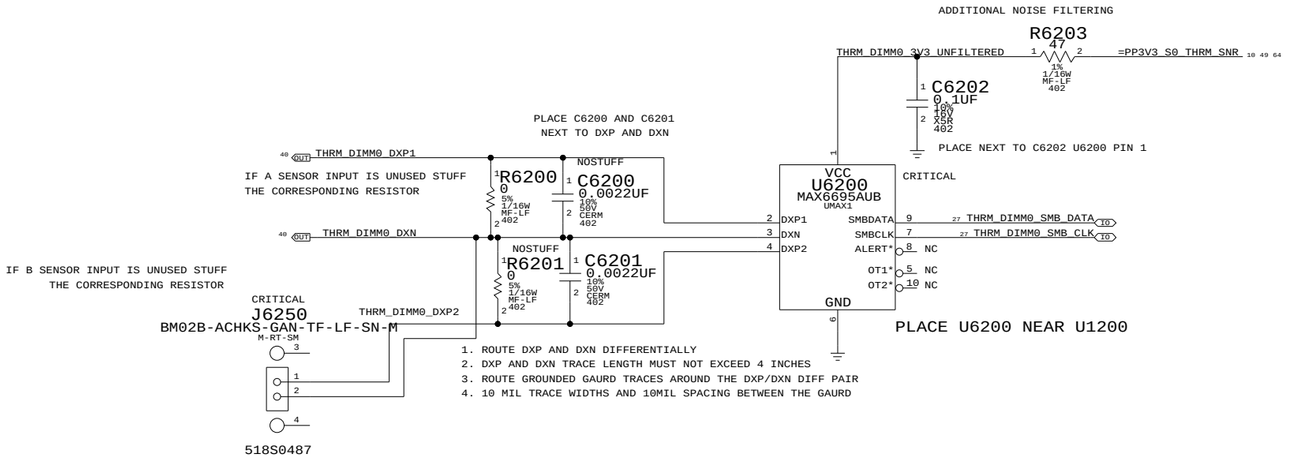

NOTE: REPLACE J6250 AND J6251 FROM 518S0332 TO 518S0452 AND THEN 518S0487
AFTER THIS CHANGE, THE SCHEAMTIC DOES NOT MATCH THE PCB ON THESE TWO LOCATIONS.

DIMM1 TEMPERATURE ZONE

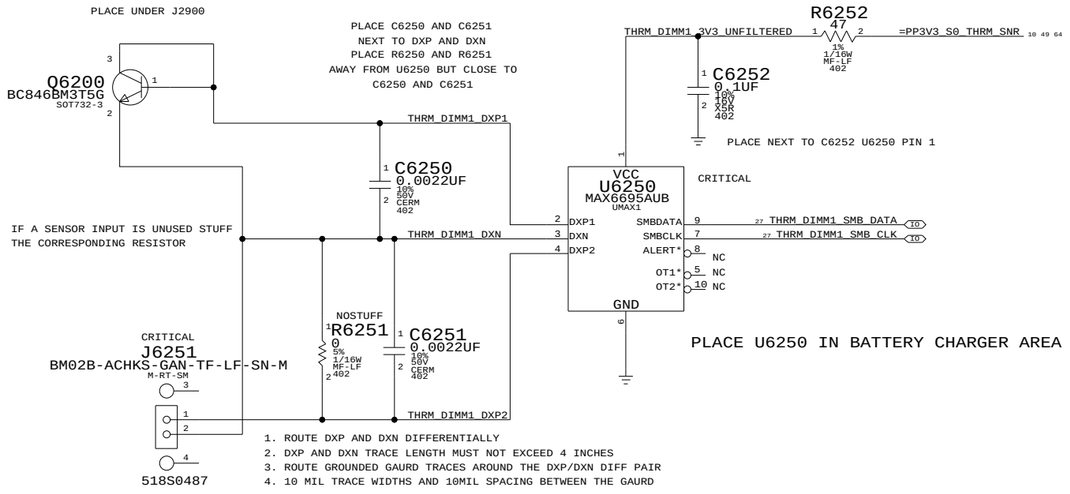

NOTE: REPLACE J6250 AND J6251 FROM 518S0332 TO 518S0452 AND 518S0487
AFTER THIS CHANGE, THE SCHEAMTIC DOES NOT MATCH THE PCB ON THESE TWO LOCATIONS.

TEMPERATURE SENSE

SYNC_MASTER=ENET SYNC_DATE=11/09/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 62 OF 108	

WWW.AliSaler.Com

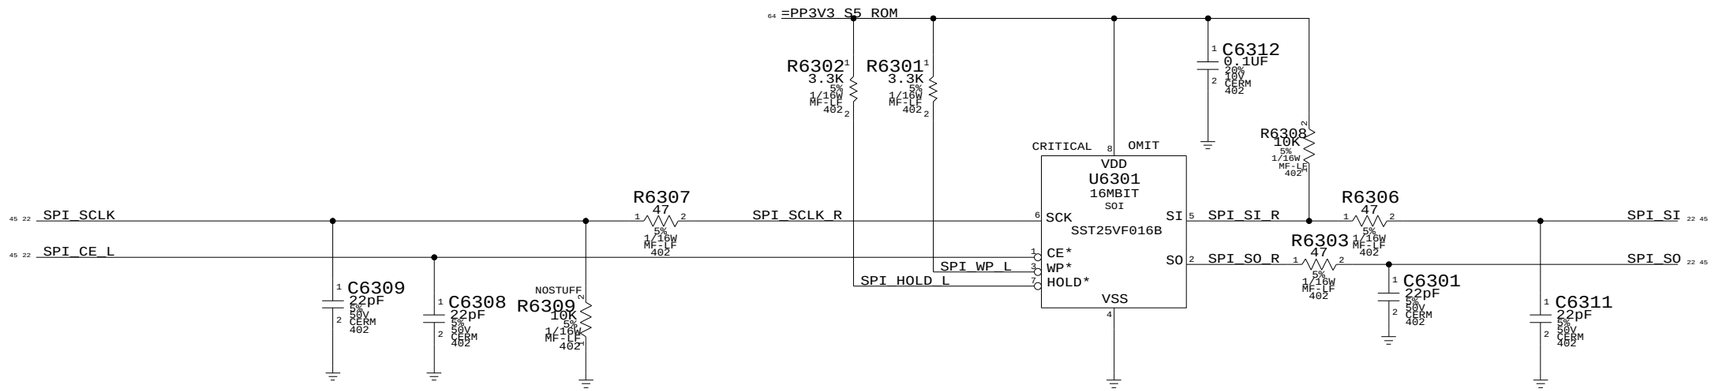

R6309 IS NOT NEEDED WHEN SHARING SPI FLASH WITH ICH7M AND TEKOA(LAN CHIP)

R6307 AND R6306 SHOULD BE PLACED LESS THAN 100 MILS FORM ICH7M

R6303 SHOULD BE PLACED LESS THAN 100 MILS FORM FLASH ROM

SPI BOOTROM

SYNC_MASTER=MASTER SYNC_DATE=5/23/05

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	63	108

WWW.AliSaler.Com

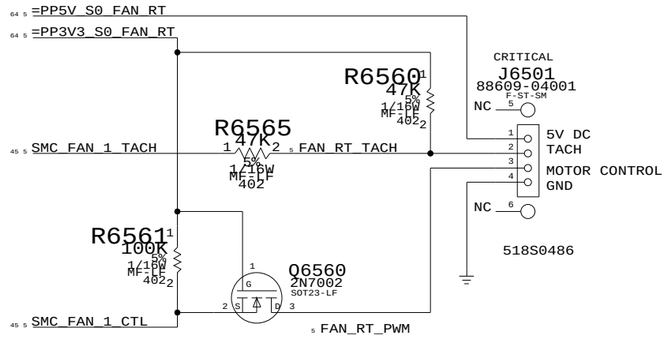

Fan

SYNC_MASTER=ENET SYNC_DATE=11/10/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 65 OF 108	

WWW.AliSaler.Com

PAGE NOTES

INPUT

=PP3V3_S3_SMS - 3.3V POWER FOR SMS (STAYS ALIVE IN SLEEP)
SMS_ONOFF_L - CONNECT TO SMC TO BE ABLE TO PUT SMS INTO LOW-POWER MODE

OUTPUT

SMS_ACC_*_AXIS - ACCELEROMETER OUTPUT TO SCU

PAGE HISTORY

5/19/2005 - FIRST REVISION OF PAGE
7/26/2005 - REMOVED BOM TABLE AND UPDATED SYMBOL TO KXM52-2050
7/26/2005 - CONNECTED PD PIN TO SMC'S SMS_ONOFF_L
7/26/2005 -

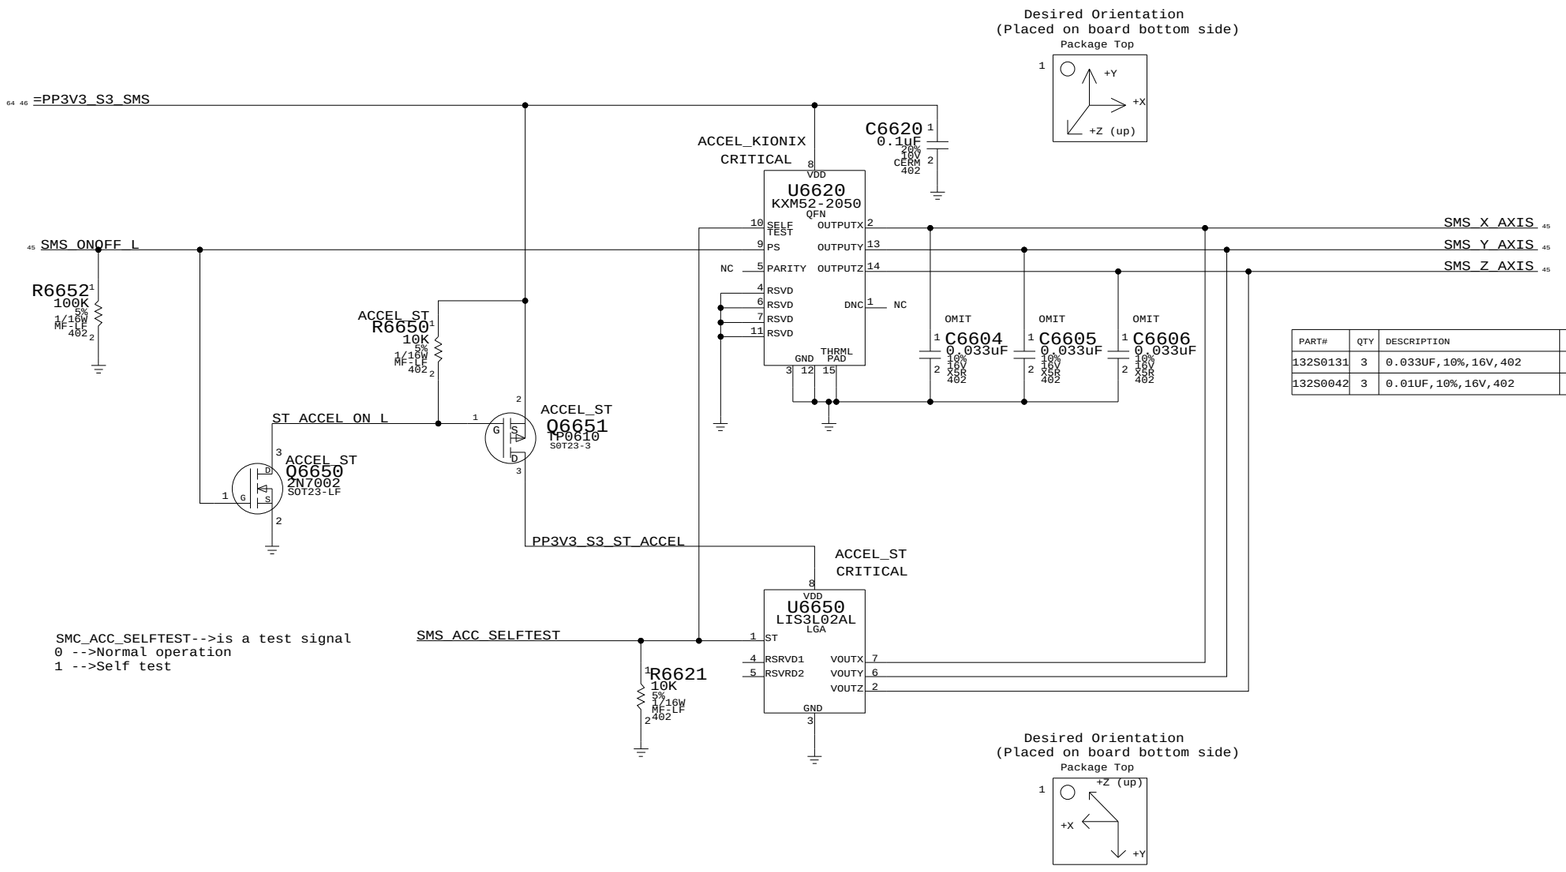

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
132S0131	3	0.033UF,10%,16V,402	C6604,C6605,C6606		ACCEL_KIONIX
132S0042	3	0.01UF,10%,16V,402	C6604,C6605,C6606		ACCEL_ST

SMS

SYNC_MASTER=SMC SYNC_DATE=08/23/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE NONE SHT 66 OF 108

WWW.AliSaler.Com

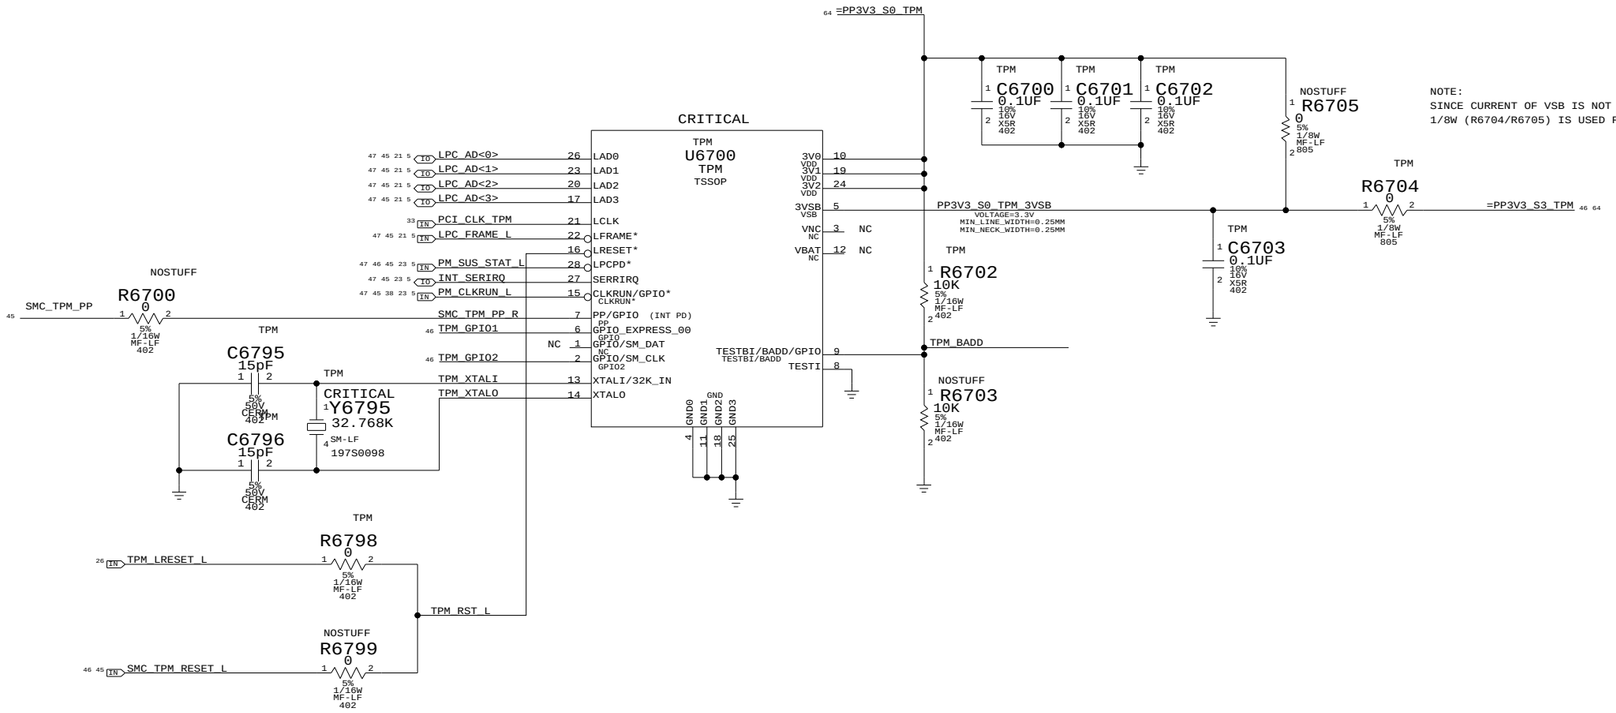

TPM

SYNC_MASTER=SMC SYNC_DATE=07/18/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 67 OF 108	

WWW.AliSaler.Com

AUDIO CODEC

APPLE P/N 353S1458

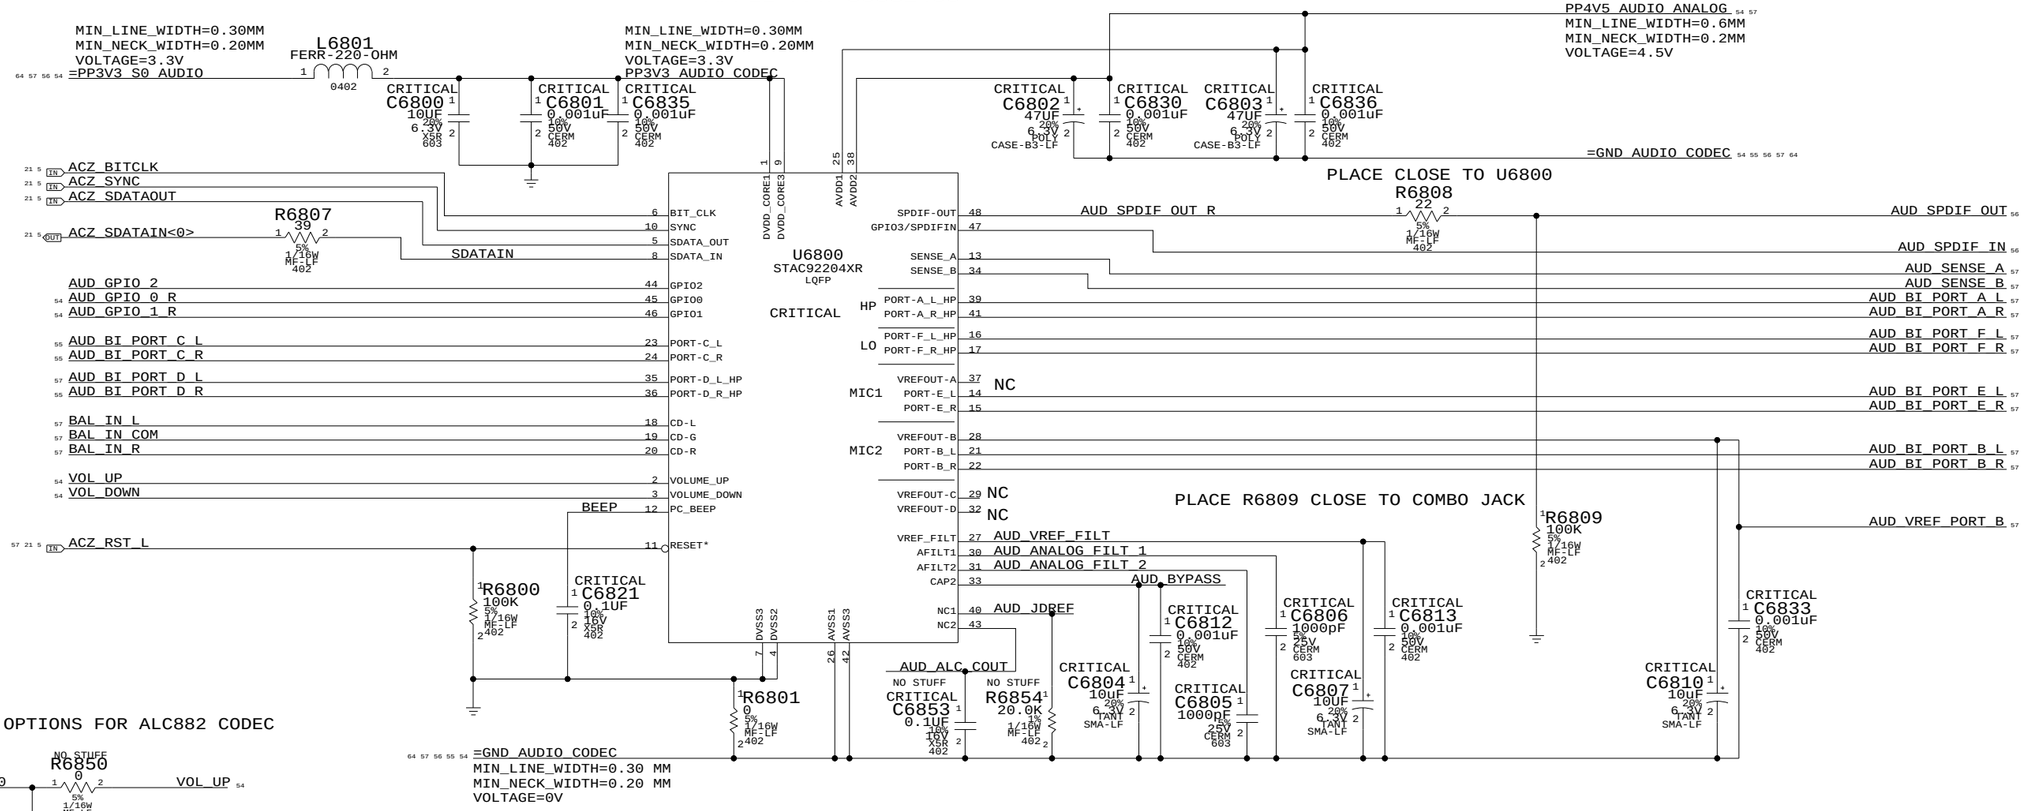

STUFFING OPTIONS FOR ALC882 CODEC

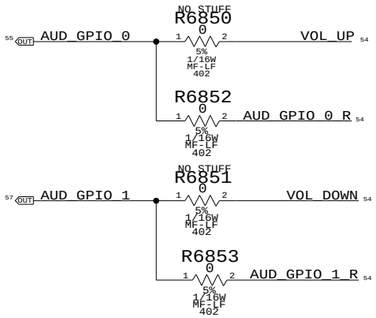

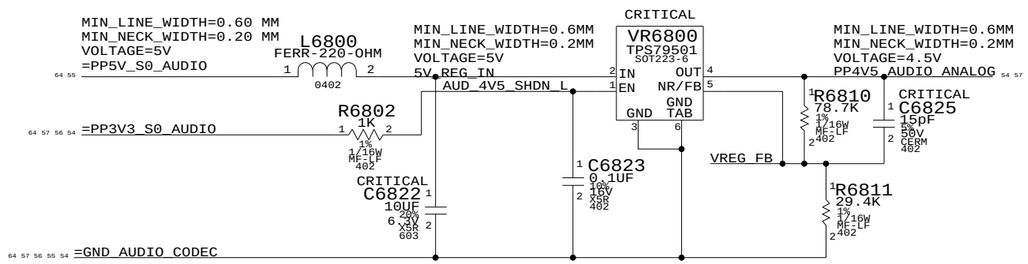

4.5V POWER SUPPLY FOR CODEC

USING DC OFFSET SCREENED PART AS PRIMARY OPTION

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
353S1345	353S1458	?	U6800	DC OFFSET SCREEN PRTS

AUDIO: CODEC

SYNC_MASTER=M42AUDIO SYNC_DATE=08/05/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE SHT 68 OF 108

WWW.AliSaler.Com

SATELLITE & SUB TWEETER AMPLIFIER APN:353S1595

SATELLITE 442 Hz < FC < 736 Hz
SUB 169 Hz < FC < 282 Hz

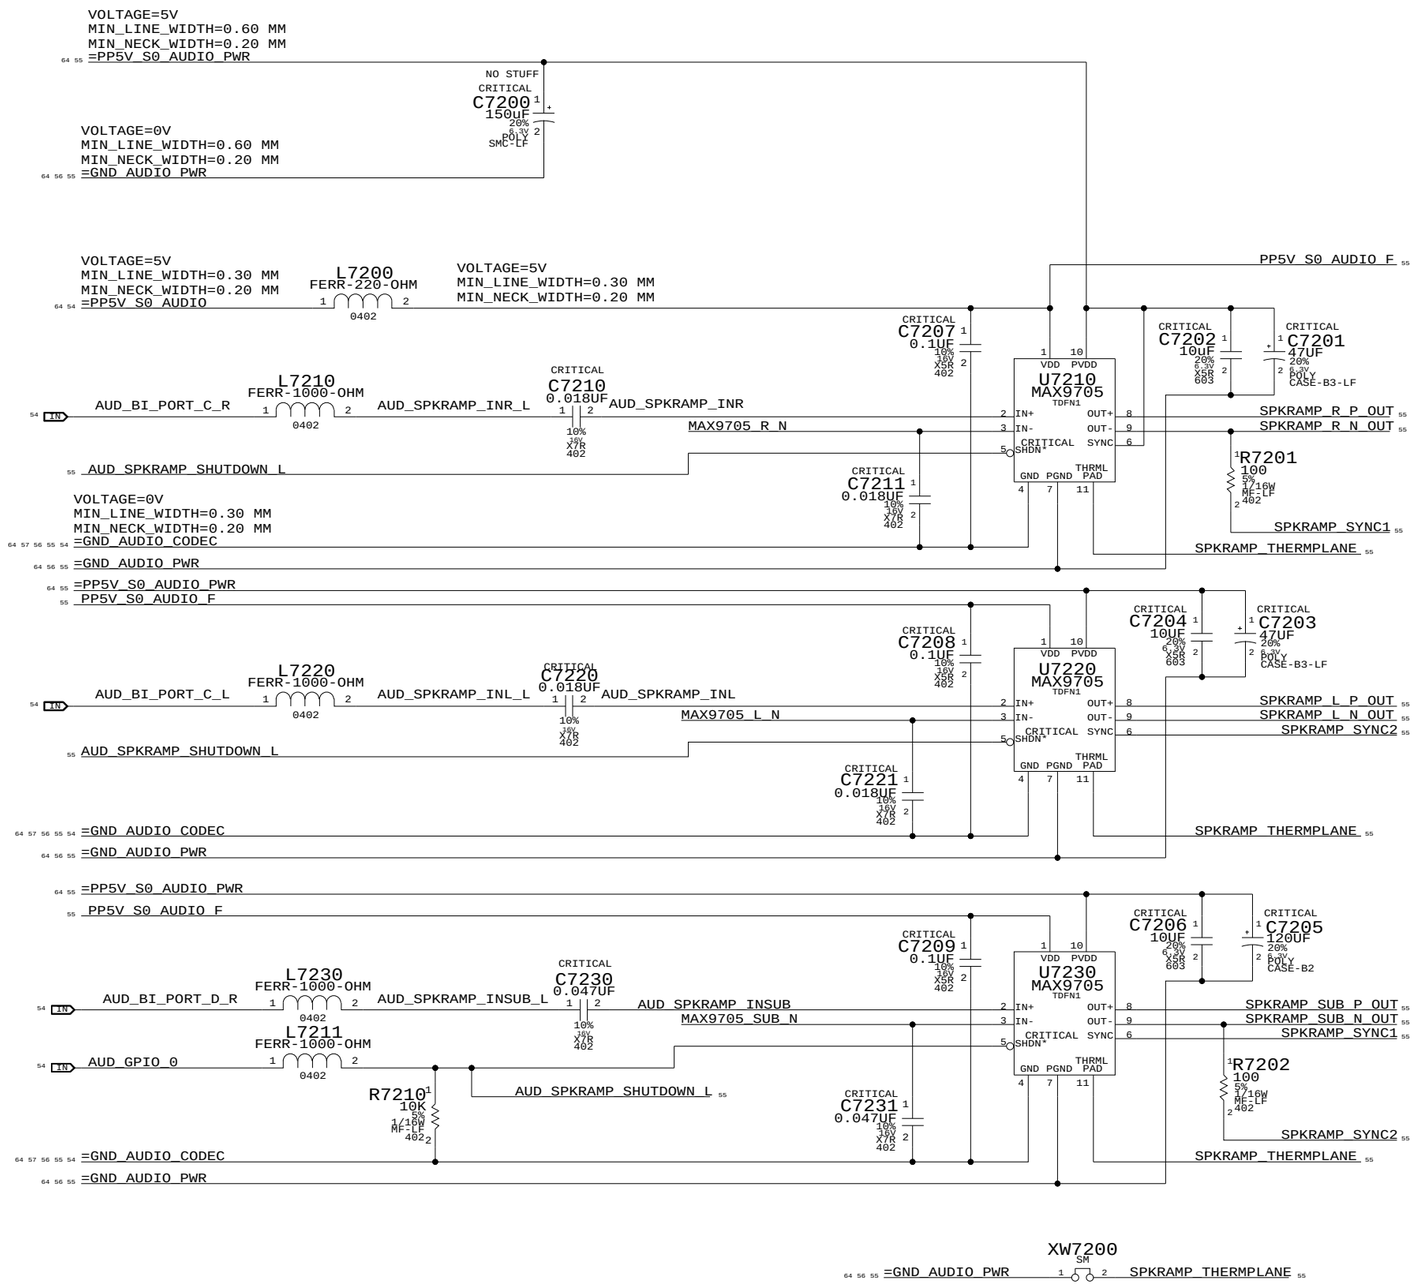

SPEAKER OUTPUT EMI FILTERS

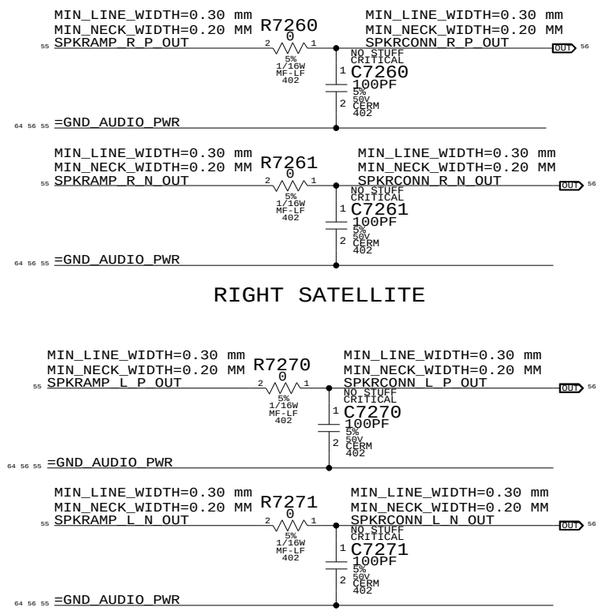

RIGHT SATELLITE

LEFT SATELLITE

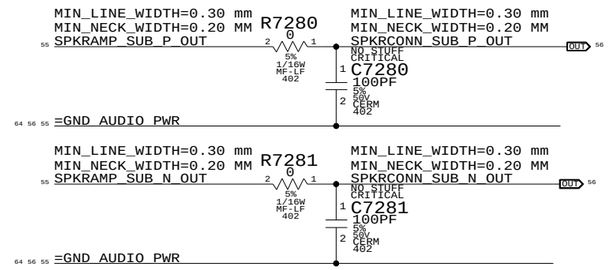

SUB-TWEETER

AUDIO: SPEAKER AMP

SYNC_MASTER=M42AUDIO SYNC_DATE=08/05/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 72 OF 108	

WWW.AliSaler.Com

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
518S0491	518S0332	?	J7302	IMPROVED TWO PIN CONNECTOR

AUDIO JACK 1: LO/HP CONNECTOR, SPDIF TX

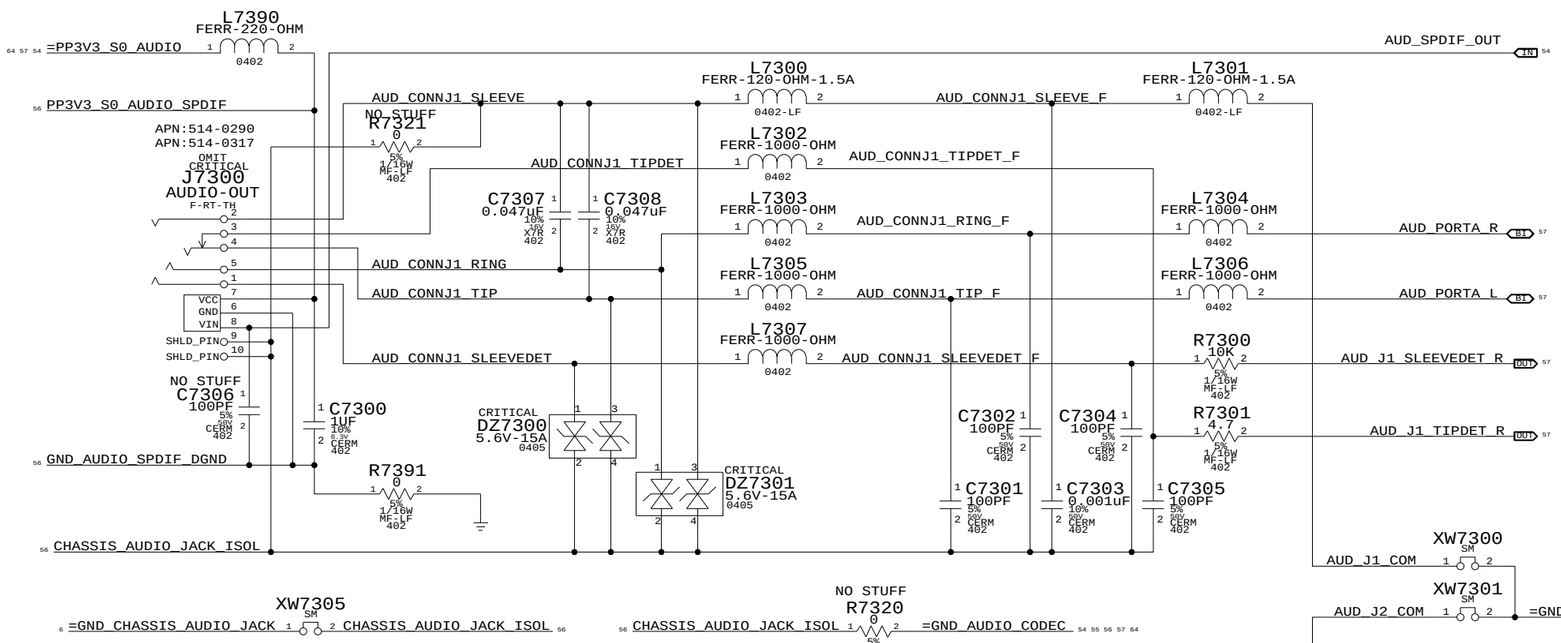

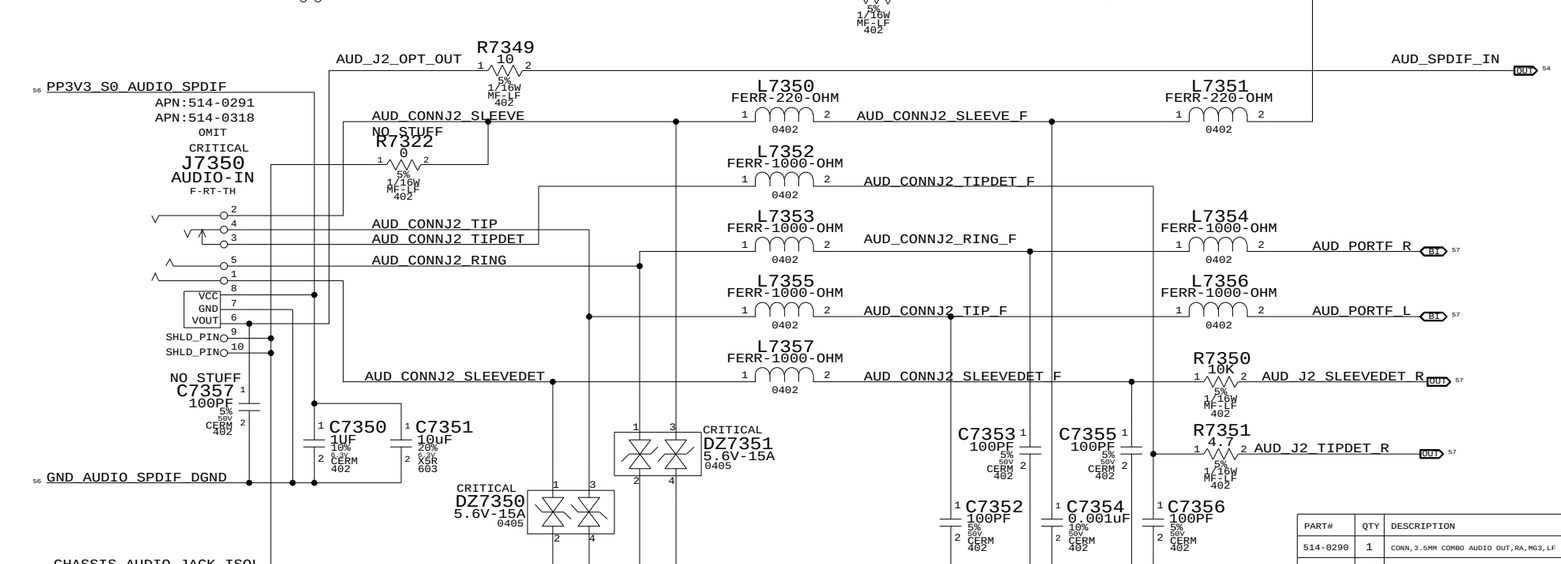

AUDIO JACK 2: LINE IN CONNECTOR, SPDIF RX

MIC CONNECTOR

APN:514S0392

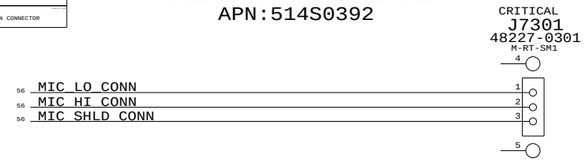

SPEAKER CONNECTOR

APN:518S0332

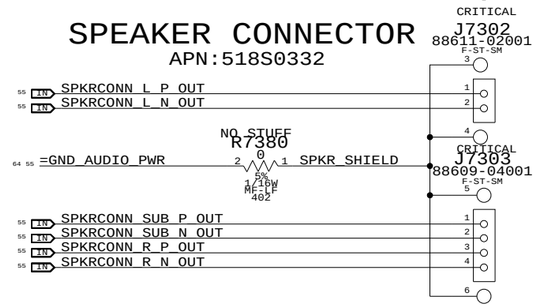

REPLACE 518S0334 WITH 518S0486

AUDIO SHIELD FILL

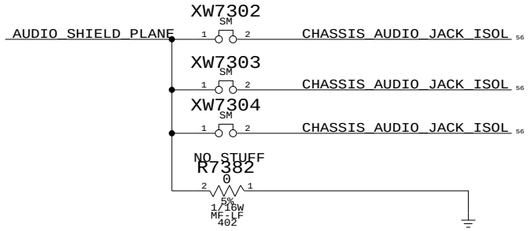

MIC EMI FILTER

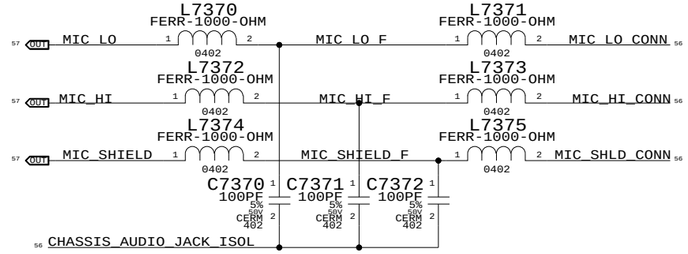

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
514-0290	1	CONN,3.5MM COMBO AUDIO OUT,RA,MG3,LF	J7300	CRITICAL	NORMAL
514-0291	1	CONN,3.5MM COMBO AUDIO IN,RA,MG3,LF	J7350	CRITICAL	NORMAL
514-0317	1	CONN,3.5MM COMBO AUDIO OUT,RA,BLACK,LF	J7300	CRITICAL	FANCY
514-0318	1	CONN,3.5MM COMBO AUDIO IN,RA,BLACK,LF	J7350	CRITICAL	FANCY

AUDIO: JACK

SYNC_MASTER=M42AUDIO SYNC_DATE=08/05/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE	SHT	OF
NONE	73	108

WWW.AliSaler.Com

PORT A DETECT PORT E DETECT(E TELLS H TO TURN ON)

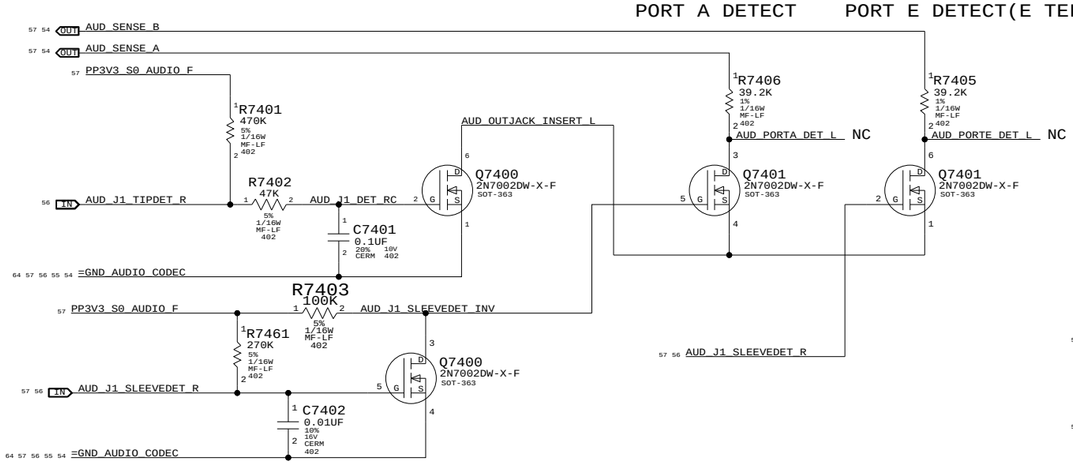

CODEC PORT ASSIGNMENTS

PORT A :HEADPHONE/LINE OUT
PORT B :MICROPHONE ON BOTH CH (ADC 0)
PORT C :SPEAKER AMP
PORT D :UNUSED
PORT E :SW USES TO TRIGGER DIGITAL OUT
PORT F :LINE IN (ADC 1)
CD INPUT :UNUSED

PORT A HP/LO

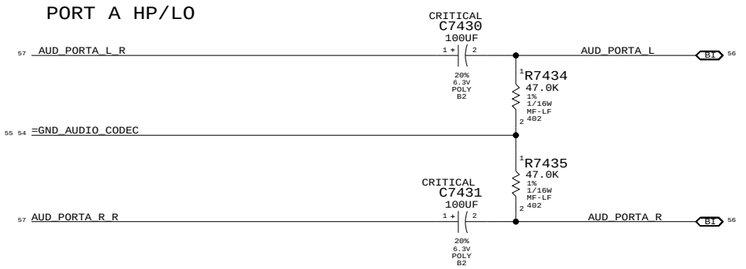

PORT F DETECT PORT G DETECT

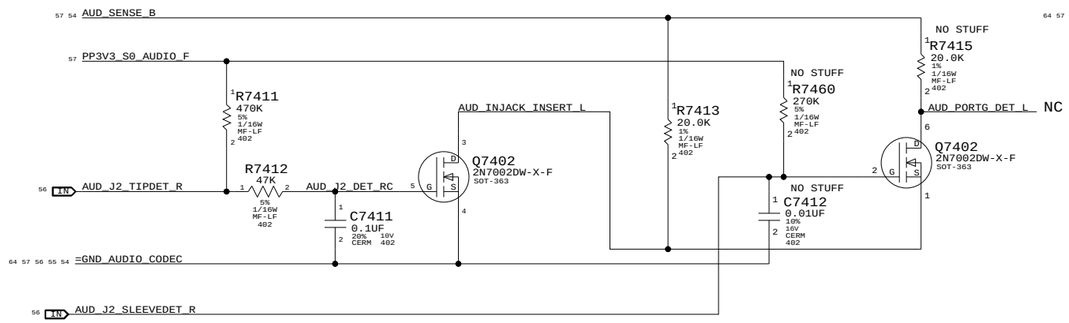

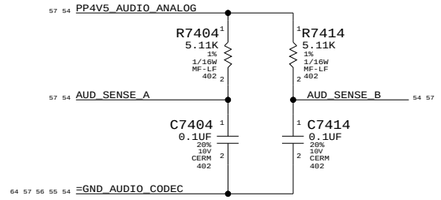

HP/LO DE-POP SWITCH APN:353S1459

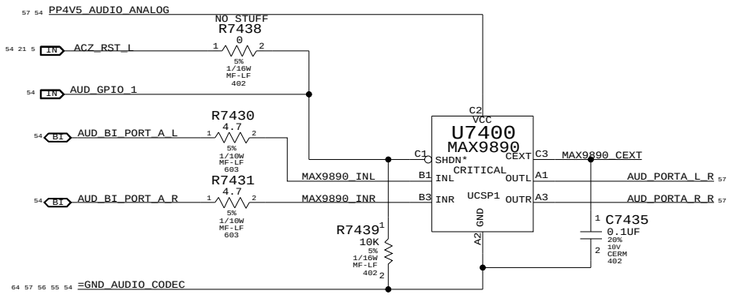

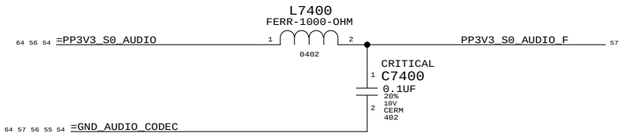

PORT F LI

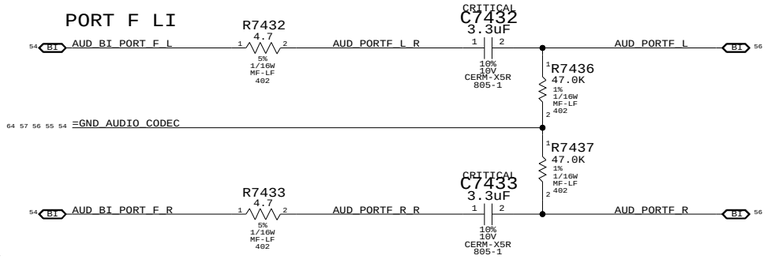

MIC INPUT CIRCUITRY

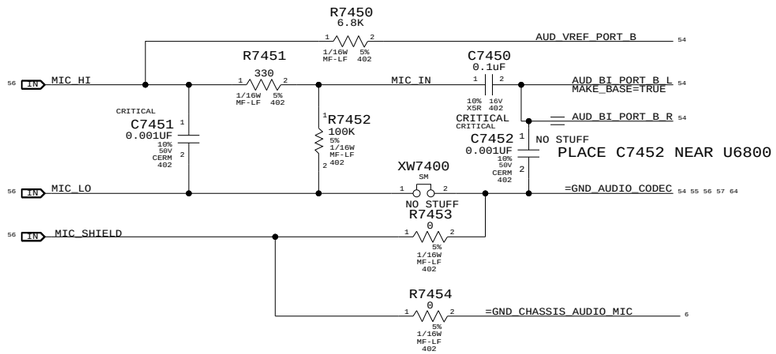

UNUSED CODEC ANALOG PORT TERMINATIONS

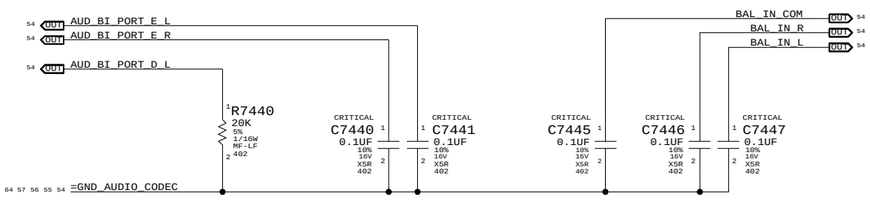

AUDIO: JACK TRANSLATORS

SYNC_MASTER=M42AUDIO SYNC_DATE=08/05/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 74 OF 108	

WWW.AliSaler.Com

IMVP6 CPU VCORE REGULATOR

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
128S0093	128S0092	?	C7501,C7508	KEMET T520V336M016ATE045?650
128S0093	128S0092	?	C7509,C7517	KEMET T520V336M016ATE045?650

DPRSLPVR	DPRSTP*	PSI*	Operation Mode
0	1	1	2-Phase CCM
0	1	0	1-Phase CCM
1	0	1	1-Phase DCM
1	0	0	1-Phase DCM

Note 1: C7532,C7533 = 27.4 Ohm For Validating CPU Only.

R0802/R0803 **on the CPU page** protect the IMVP6 if the CPU is not installed

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S1465	1	ISL6262	U7500		M42
353S1461	1	ISL9504	U7500		M42A

	MIN_LINE_WIDTH	MIN_NECK_WIDTH
IMVP6_PHASE1	1.5 MM	0.25 MM
IMVP6_BOOT1	0.25 MM	0.25 MM
IMVP6_UGATE1	1.5 MM	0.25 MM
IMVP6_LGATE1	1.5 MM	0.25 MM
IMVP6_ISEN1	0.25 MM	0.25 MM
IMVP6_FET_RC1	0.25 MM	0.25 MM
IMVP6_VSUM_R1	0.25 MM	0.25 MM
IMVP6_VO_R1	0.25 MM	0.25 MM

	MIN_LINE_WIDTH	MIN_NECK_WIDTH
IMVP6_PHASE2	0.25 MM	0.25 MM
IMVP6_BOOT2	0.25 MM	0.25 MM
IMVP6_UGATE2	0.25 MM	0.25 MM
IMVP6_LGATE2	0.25 MM	0.25 MM
IMVP6_ISEN2	0.25 MM	0.25 MM
IMVP6_FET_RC2	0.25 MM	0.25 MM
IMVP6_VSUM_R2	0.25 MM	0.25 MM
IMVP6_VO_R2	0.25 MM	0.25 MM

	MIN_LINE_WIDTH	MIN_NECK_WIDTH
IMVP6_OCSET	0.25 MM	0.20 MM
CPU_VID_R<0..6>	0.25 MM	0.20 MM
IMVP6_VSUM	0.25 MM	0.20 MM
GND_IMVP6_SGND	0.50 MM	0.20 MM
IMVP6_VO	0.25 MM	0.20 MM
IMVP6_DROOP	0.25 MM	0.20 MM
IMVP6_DFB	0.25 MM	0.20 MM
IMVP6_SOFT	0.25 MM	0.20 MM
IMVP6_RBIAS	0.25 MM	0.20 MM
IMVP6_VDIFF	0.25 MM	0.20 MM
IMVP6_FB2	0.25 MM	0.20 MM
IMVP6_FB	0.25 MM	0.20 MM
IMVP6_COMP	0.25 MM	0.20 MM
IMVP6_VW	0.25 MM	0.25 MM
CPU_VCCSENSE_P	0.25 MM	0.25 MM
CPU_VCCSENSE_N	0.25 MM	0.25 MM
IMVP6_RTN	0.25 MM	0.25 MM
IMVP6_VSEN	0.25 MM	0.25 MM

IMVP6 CPU VCore Regulator

SYNC_MASTER=POWER SYNC_DATE=07/13/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 75 OF 108	

WWW.AliSaler.Com

5V/3.3V POWER SUPPLY

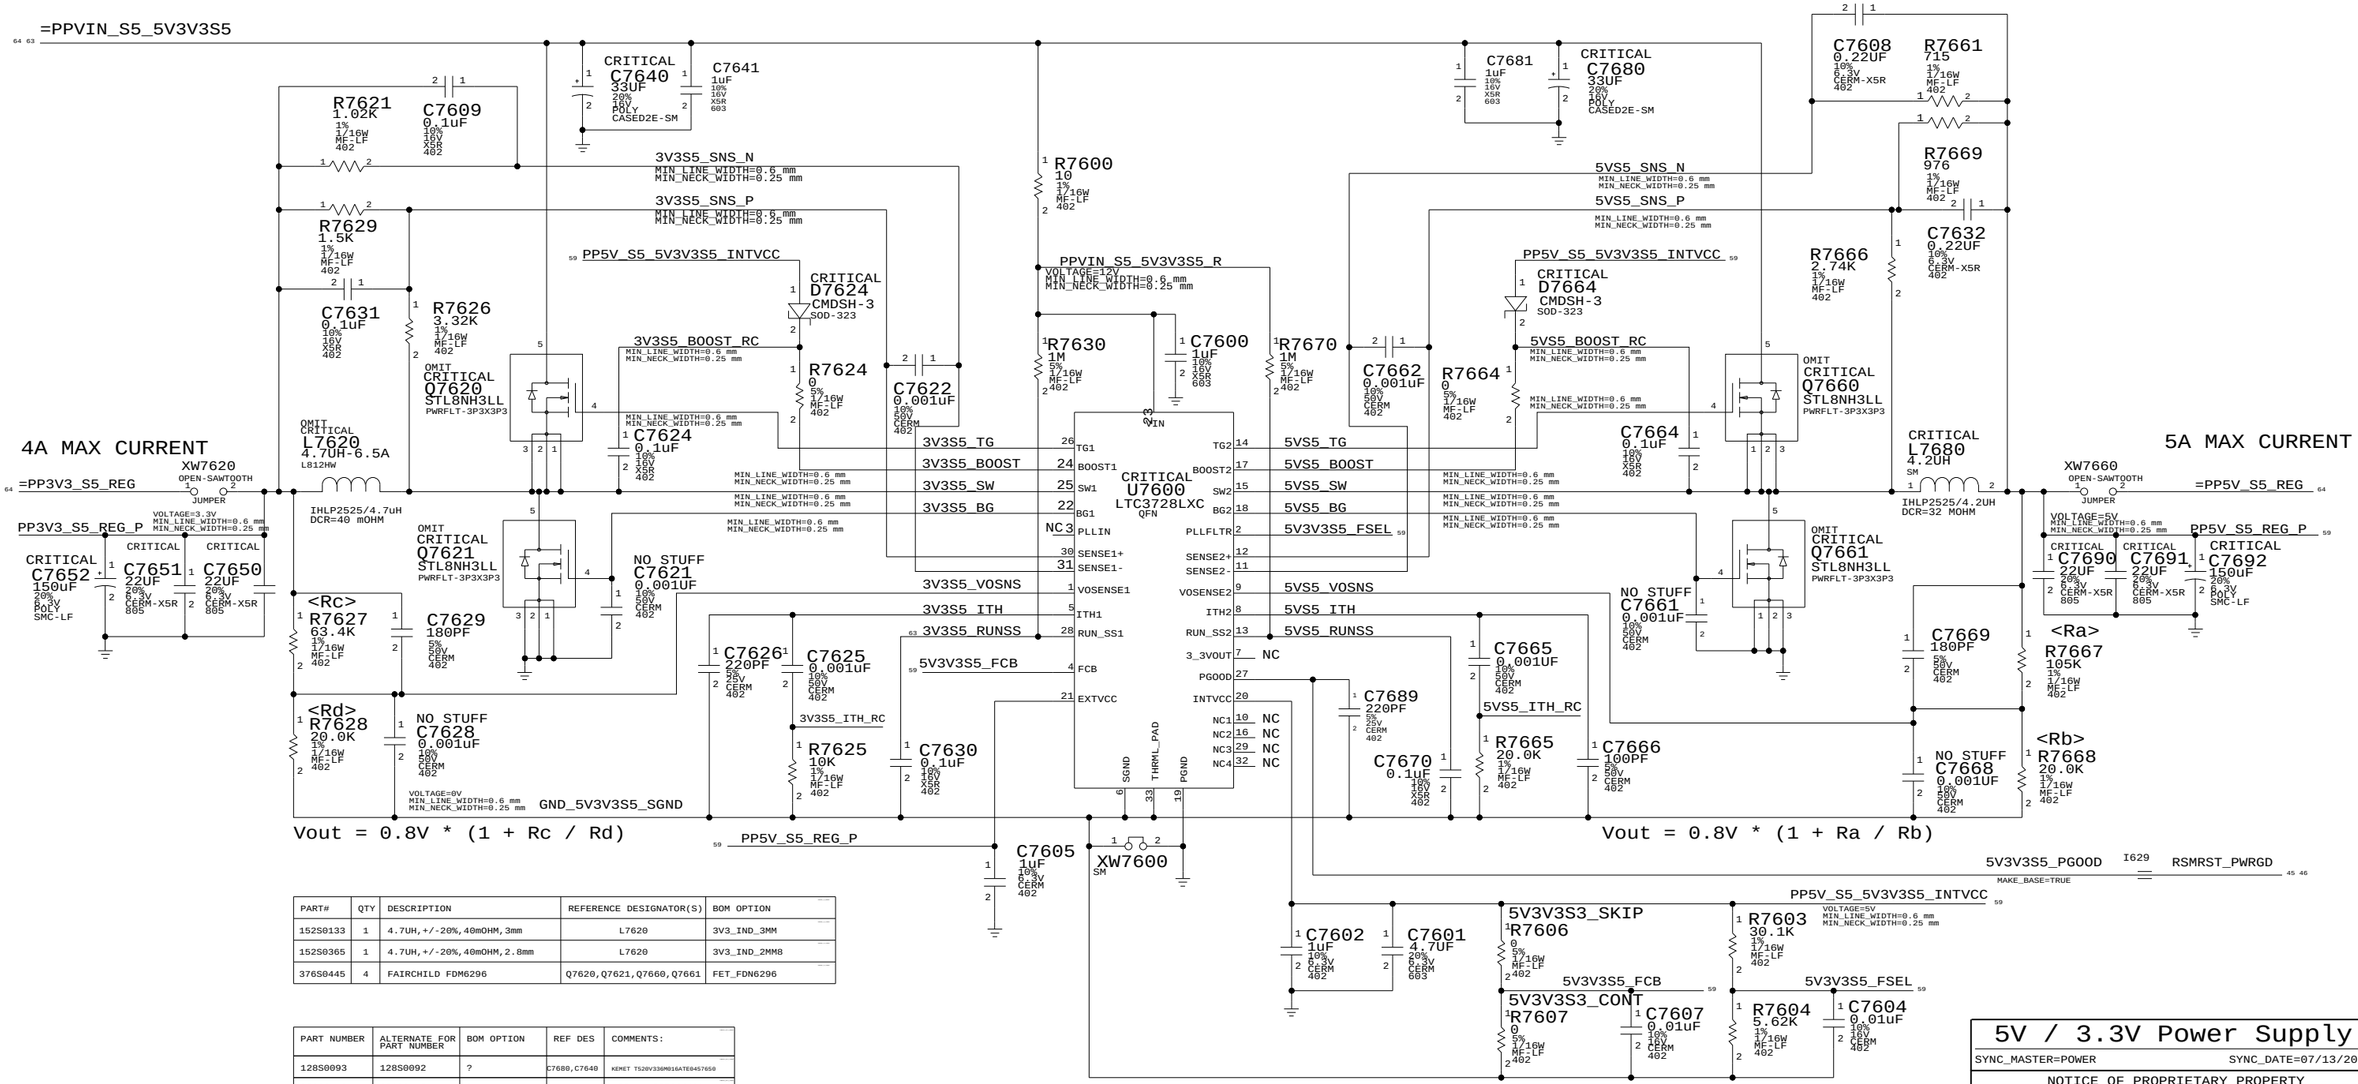

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
152S0133	1	4.7UH,+/-20%,40mOHM,3mm	L7620	3V3_IND_3MM
152S0365	1	4.7UH,+/-20%,40mOHM,2.8mm	L7620	3V3_IND_2MM8
376S0445	4	FAIRCHILD FDM6296	Q7620,Q7621,Q7660,Q7661	FET_FDN6296

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
128S0093	128S0092	?	C7680,C7640	KEMET T520V336M016ATE0457650
376S0448	376S0445	?	Q7620,Q7621	VISHAY SI7806ADN
376S0448	376S0445	?	Q7660,Q7661	VISHAY SI7806ADN

5V / 3.3V Power Supply

SYNC_MASTER=POWER SYNC_DATE=07/13/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 76 OF 108	

WWW.AliSaler.Com

YUKON POWER CONTROL

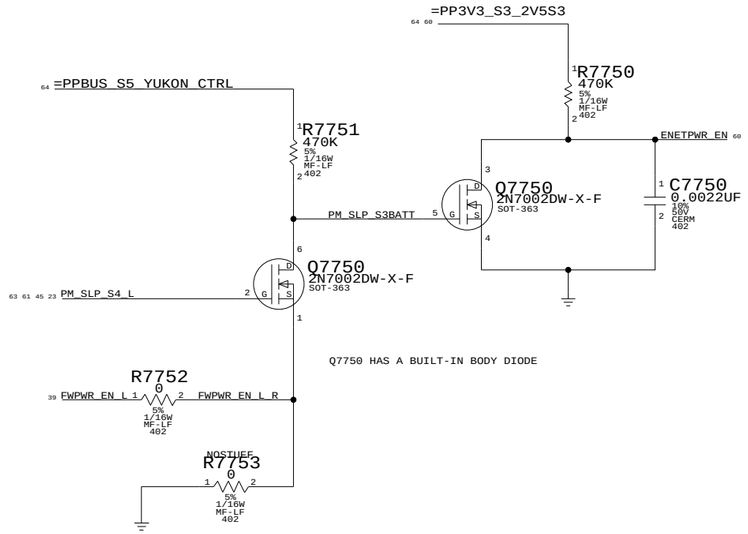

NAME	PM_SLP_S4_L	FWPWR_EN_L	PM_SLP_S3BATT	ENETPWR_EN
LOGIC	S3 | S0	~S0 | ~SMC_PS_ON		POWER YUKON
S3 ON BATTERY	TRUE (3.3V)	TRUE (PBUS 12.6V)	TRUE (PBUS 12.6V)	FALSE (0V)
S0 OR S3 ON AC	TRUE (3.3V)	FALSE (0V)	FALSE (0V)	TRUE (3.3V)
S5 ON AC	FALSE (0V)	TRUE (PBUS 12.6V)	TRUE (PBUS 12.6V)	FALSE (0V)
S5 ON BATT	FALSE (0V)	FALSE (0V)	TRUE (PBUS 12.6V)	FALSE (0V)

NOTE: IF CHANGE TO STUFFING R7753 THEN ENETPWR_EN IS BUFFERED PM_SLP_S4_L

2.5V REGULATORS

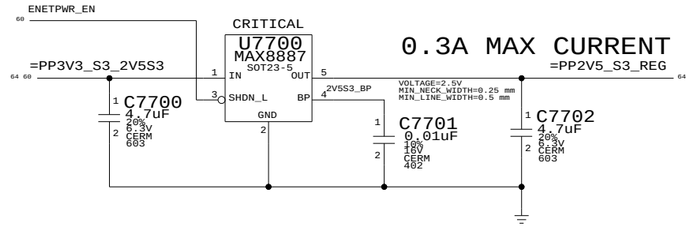

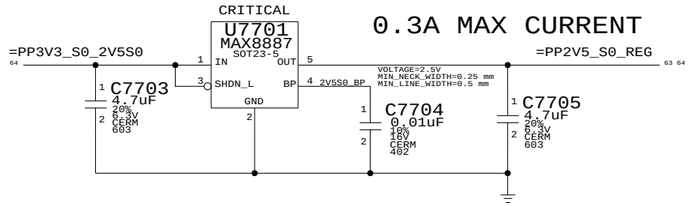

1.2V REGULATOR

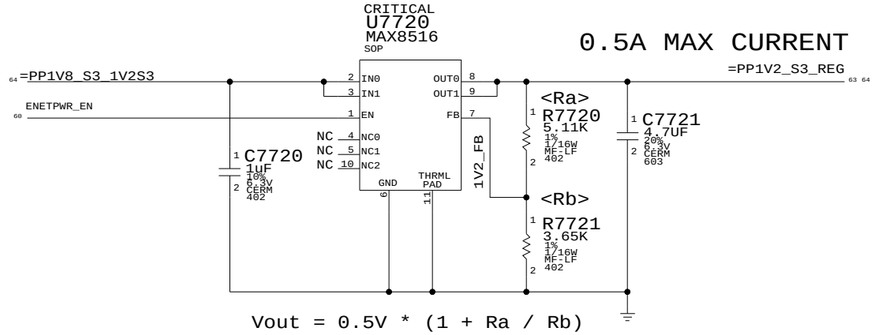

Vout = 0.5V * (1 + Ra / Rb)

2.5V/1.2V Regulator	
SYNC_MASTER=ENET	SYNC_DATE=12/06/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 77 OF 108	

WWW.AliSaler.Com

1.8V POWER SUPPLY

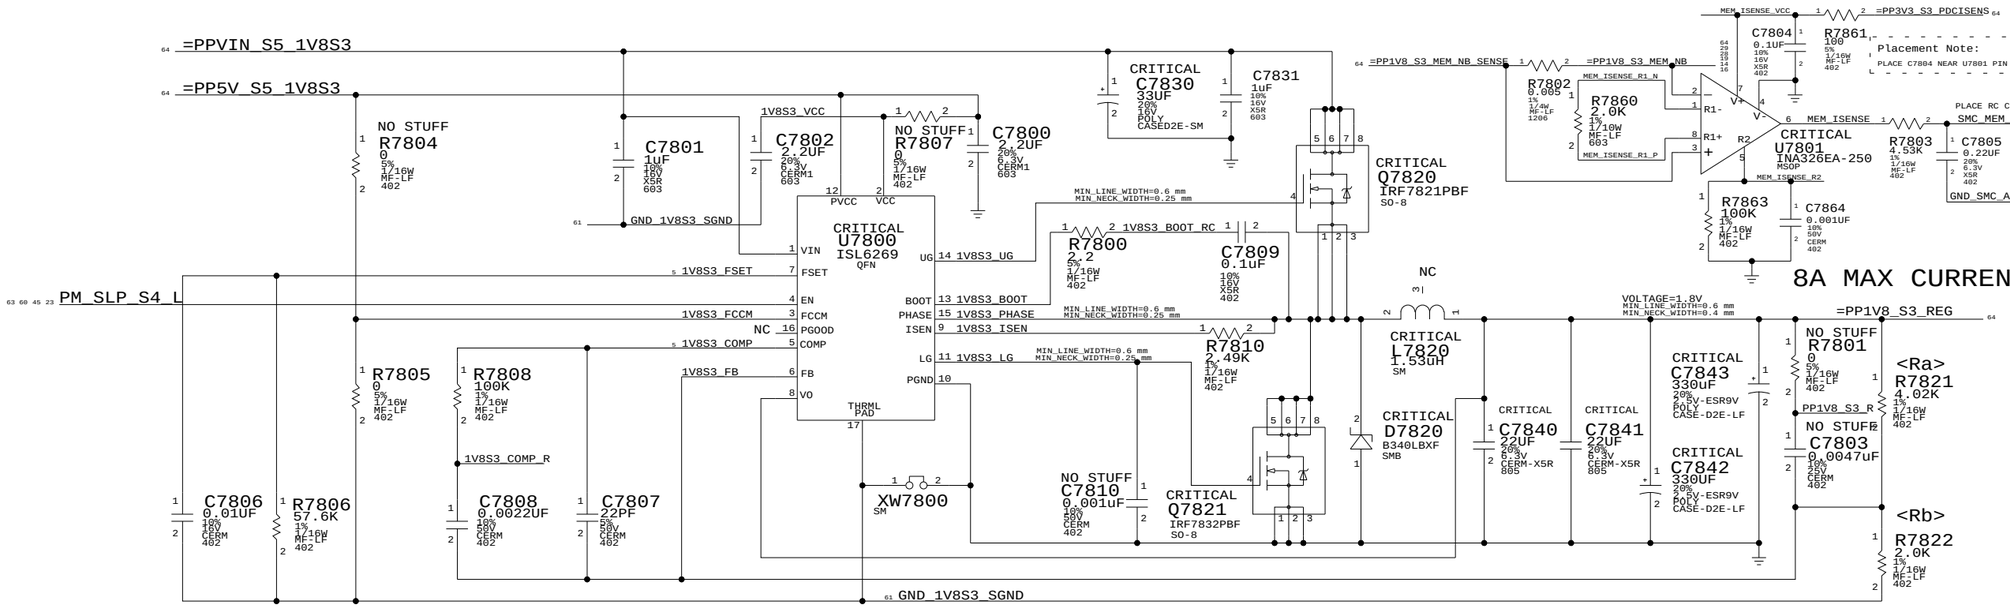

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
128S0093	128S0092	?	C7830	KEMET T520V336M016ATE045760

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
128S0094	128S0060	?	C7842,C7843	PANASONIC EEFSX0D331ER
128S0095	128S0060	?	C7842,C7843	PANASONIC EEFSX0D331XE

1.8V Supply

SYNC_MASTER=POWER SYNC_DATE=07/13/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 78 OF 108	

WWW.AliSaler.Com

1.5V/1.05V POWER SUPPLY

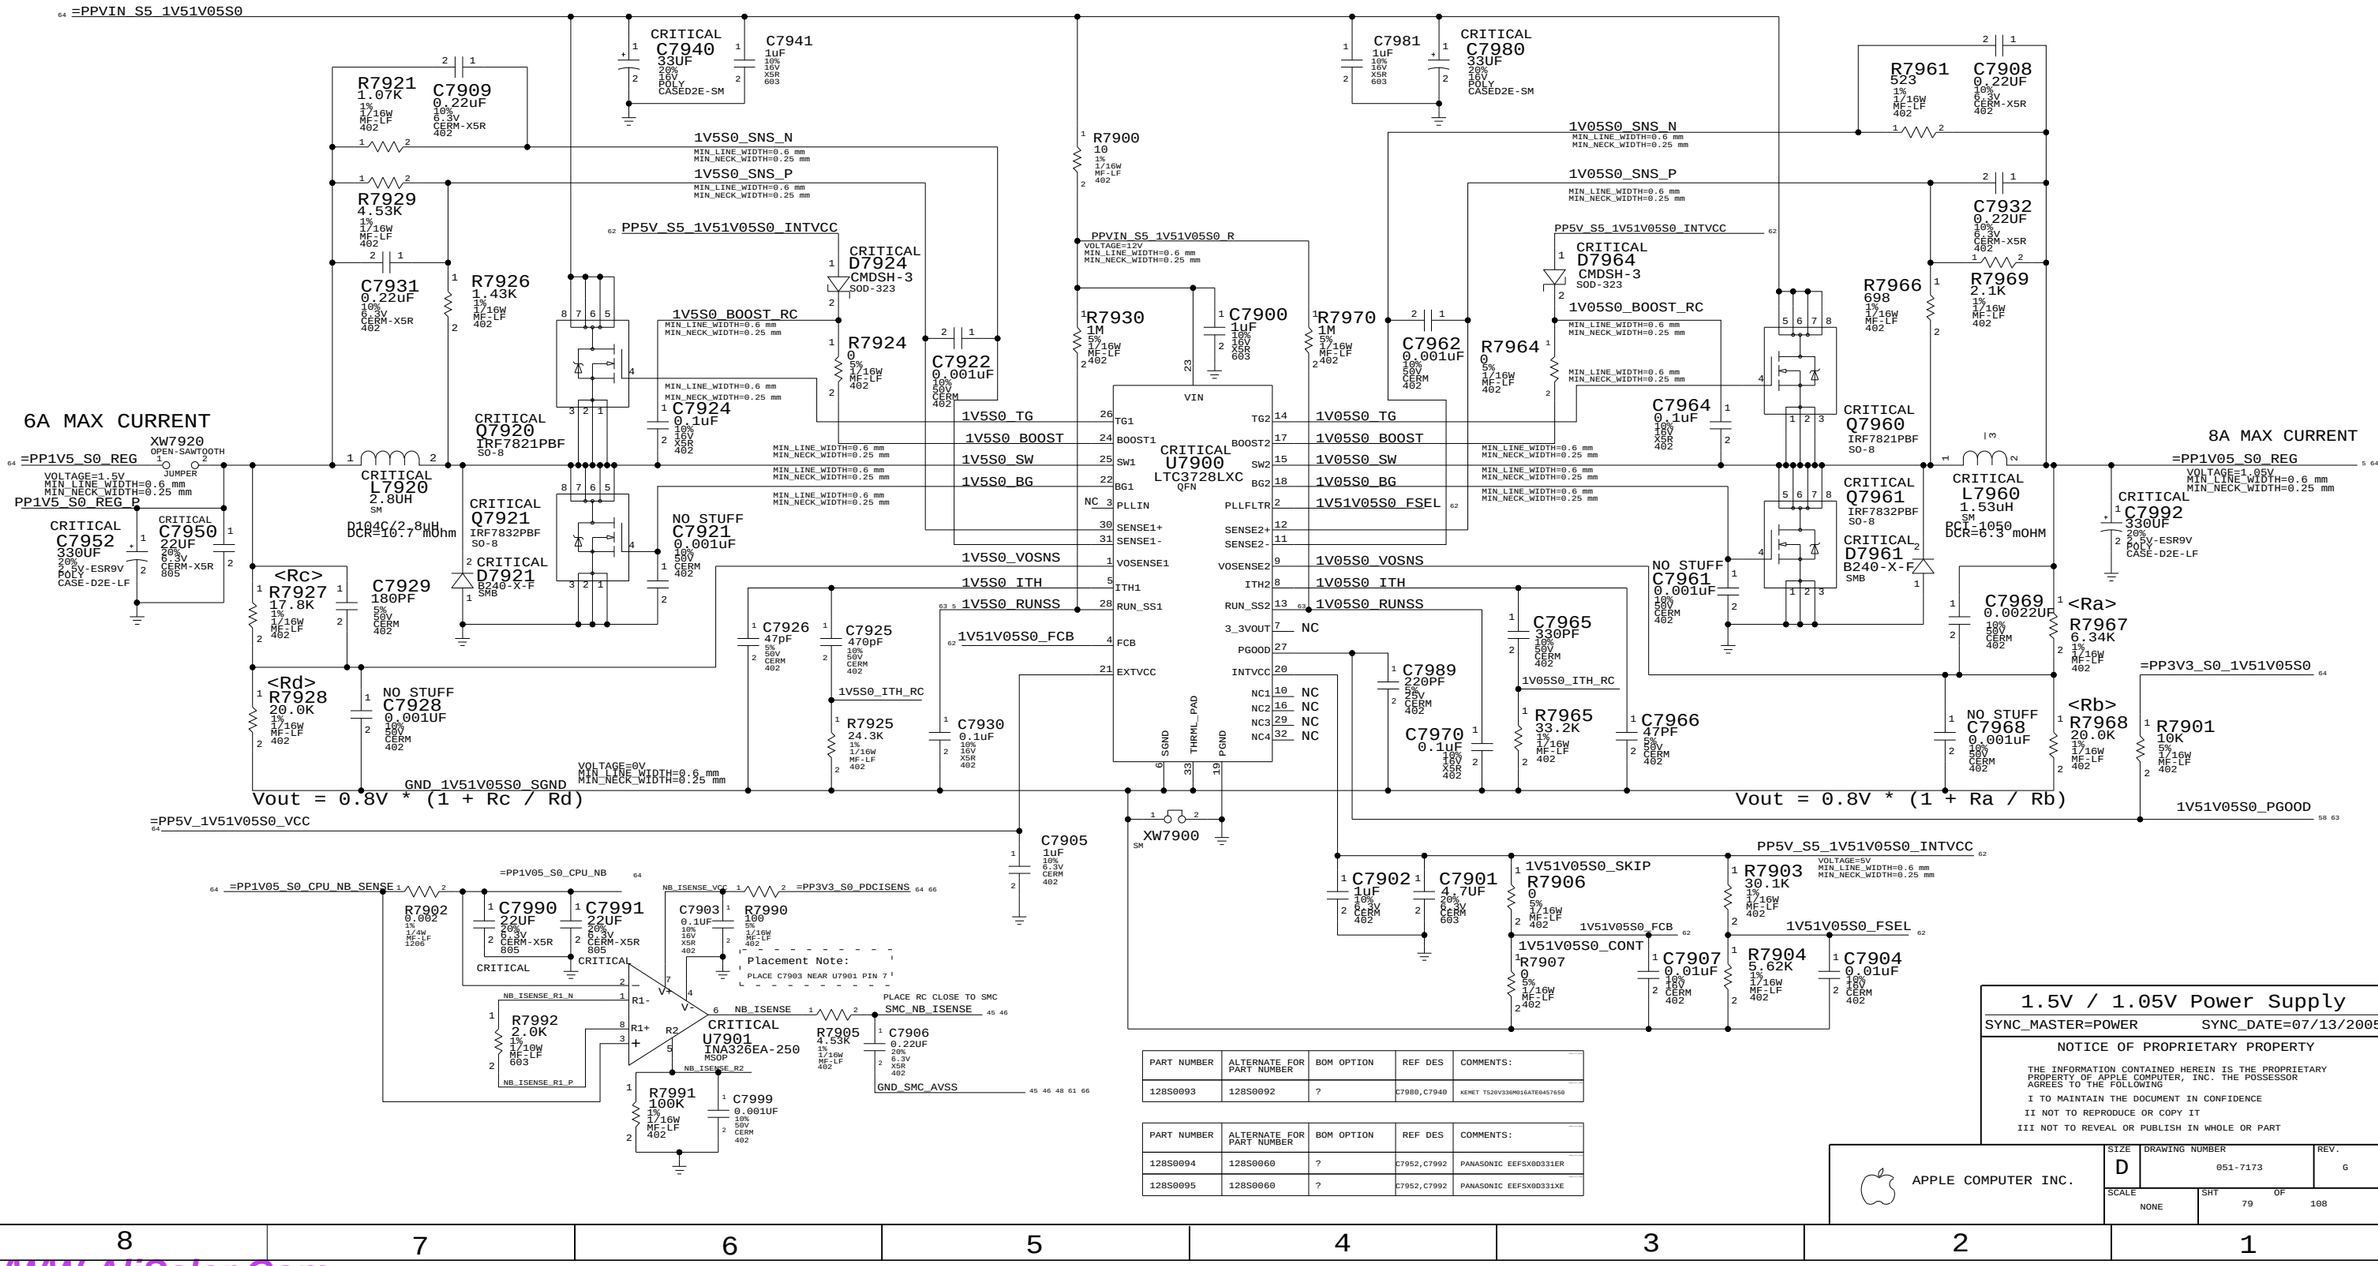
=PPVIN_S5_1V51V05S0
CRITICAL C7940 33UF 20% 16V POLY CASED2E-SM
C7941 1uF 10% 16V X5R 603
C7981 1uF 10% 16V X5R 603
CRITICAL C7980 33UF 20% 16V POLY CASED2E-SM
R7921 1.07K 1% 1/16W MF-LF 402
C7909 0.22UF 10% 6.3V CERM-X5R 402
R7961 523 1% 1/16W MF-LF 402
C7908 0.22UF 10% 6.3V CERM-X5R 402
1V5S0_SNS_N
1V05S0_SNS_N
MIN_LINE_WIDTH=0.6 mm
MIN_NECK_WIDTH=0.25 mm
R7929 4.53K 1% 1/16W MF-LF 402
1V5S0_SNS_P
1V05S0_SNS_P
C7932 0.22UF 10% 6.3V CERM-X5R 402
PP5V_S5_1V51V05S0_INTVCC
CRITICAL D7924 CMDSH-3 SOD-323
CRITICAL D7964 CMDSH-3 SOD-323
C7931 0.22UF 10% 6.3V CERM-X5R 402
R7926 1.43K 1% 1/16W MF-LF 402
1V5S0_BOOST_RC
1V05S0_BOOST_RC
R7966 698 1% 1/16W MF-LF 402
R7969 2.1K 1% 1/16W MF-LF 402
R7924 0 5% 1/16W MF-LF 402
C7922 0.001uF 10% 50V CERM 402
C7924 0.1uF 10% 16V X5R 402
R7900 10 1% 1/16W MF-LF 402
PPVIN_S5_1V51V05S0_R
VOLTAGE=12V
R7930 1M 5% 1/16W MF-LF 402
C7900 1uF 10% 25V X5R 603
R7970 1M 5% 1/16W MF-LF 402
C7962 0.001uF 10% 50V CERM 402
R7964 0 5% 1/16W MF-LF 402
C7964 0.1uF 10% 16V X5R 402
CRITICAL Q7960 IRF7821PBF SO-8
6A MAX CURRENT
XW7920 OPEN-SAWTOOTH JUMPER
=PP1V5_S0_REG
VOLTAGE=1.5V
PP1V5_S0_REG_R
CRITICAL L7920 2.8UH SM
Dtot/2.8uH DCR=16.7 mOhm
CRITICAL Q7920 IRF7821PBF SO-8
CRITICAL Q7921 IRF7832PBF SO-8
NO STUFF C7921 0.001uF 10% 50V CERM 402
CRITICAL L7960 1.53uH SM PCI-1050 DCR=0.9 mOHM
CRITICAL Q7961 IRF7832PBF SO-8
CRITICAL D7961 B240-X-F SMB
8A MAX CURRENT
=PP1V05_S0_REG
VOLTAGE=1.05V
CRITICAL C7992 330UF 20% 2.5V-ESR9V POLY CASE-D2E-LF
CRITICAL C7950 330UF 20% 2.5V-ESR9V POLY CASE-D2E-LF
CRITICAL C7952 22UF 20% 6.3V CERM-X5R 805
<Rc> R7927 17.8K 1% 1/16W MF-LF 402
C7929 180PF 5% 50V CERM 402
<Rd> R7928 20.0K 1% 1/16W MF-LF 402
NO STUFF C7928 0.001UF 10% 50V CERM 402
C7926 47pF 5% 50V CERM 402
C7925 470pF 10% 50V CERM 402
1V5S0_ITH_RC
R7925 24.3K 1% 1/16W MF-LF 402
C7930 0.1uF 10% 16V X5R 402
1V51V05S0_FCB
C7989 220PF 5% 25V CERM 402
C7970 0.1uF 10% 16V X5R 402
C7965 330PF 10% 50V CERM 402
1V05S0_ITH_RC
R7965 33.2K 1% 1/16W MF-LF 402
C7966 47PF 5% 50V CERM 402
C7969 0.0022UF 10% 50V CERM 402
<Ra> R7967 6.34K 1% 1/16W MF-LF 402
NO STUFF C7968 0.001uF 10% 50V CERM 402
<Rb> R7968 20.0K 1% 1/16W MF-LF 402
=PP3V3_S0_1V51V05S0
R7901 10K 5% 1/16W MF-LF 402
1V51V05S0_PGOOD
Vout = 0.8V * (1 + Rc / Rd)
Vout = 0.8V * (1 + Ra / Rb)
GND_1V51V05S0_SGND
VOLTAGE=0V
MIN_LINE_WIDTH=0.6 mm
MIN_NECK_WIDTH=0.25 mm
U7900 LTC3728LXC QFN
TG1 BOOST1 SW1 BG1 PLLIN SENSE1+ SENSE1- VOSNS1 ITH1 RUN_SS1 FCB EXTVCC
TG2 BOOST2 SW2 BG2 PLLFLTR SENSE2+ SENSE2- VOSENSE2 ITH2 RUN_SS2 3_3VOUT PGOOD INTVCC NC1 NC2 NC3 NC4 SGND THRML_PAD PGND
1V5S0_TG 1V5S0_BOOST 1V5S0_SW 1V5S0_BG 1V5S0_VOSNS 1V5S0_ITH 1V5S0_RUNSS
1V05S0_TG 1V05S0_BOOST 1V05S0_SW 1V05S0_BG 1V51V05S0_FSEL 1V05S0_VOSNS 1V05S0_ITH 1V05S0_RUNSS
NC
VIN
XW7900 SM
C7905 1uF 10% 6.3V CERM 402
C7902 1uF 10% 6.3V CERM 402
C7901 4.7UF 20% 6.3V CERM 603
1V51V05S0_SKIP
R7906 0 5% 1/16W MF-LF 402
1V51V05S0_CONT
R7907 0 5% 1/16W MF-LF 402
C7907 0.01uF 10% 16V CERM 402
PP5V_S5_1V51V05S0_INTVCC
R7903 30.1K 1% 1/16W MF-LF 402
R7904 5.62K 1% 1/16W MF-LF 402
C7904 0.01uF 10% 16V CERM 402
=PP1V05_S0_CPU_NB
=PP1V05_S0_CPU_NB_SENSE
R7902 0.002 1% 1/4W MF-LF 1206
C7990 22UF 20% 6.3V CERM-X5R 805
C7991 22UF 20% 6.3V CERM-X5R 805
NB_ISENSE_VCC
=PP3V3_S0_PDCISENS
C7903 0.1UF 10% 16V X5R 402
R7990 100 5% 1/16W MF-LF 402
Placement Note:
PLACE C7903 NEAR U7901 PIN 7
PLACE RC CLOSE TO SMC
CRITICAL U7901 INA326EA-250 MSOP
NB_ISENSE_R1_N
NB_ISENSE_R1_P
NB_ISENSE_R2
NB_ISENSE
SMC_NB_ISENSE
R7992 2.0K 1% 1/16W MF-LF 603
R7905 4.53K 1% 1/16W MF-LF 402
C7906 0.22UF 20% 6.3V X5R 402
R7991 100K 1% 1/16W MF-LF 402
C7999 0.001UF 10% 50V CERM 402
GND_SMC_AVSS
PART NUMBER | ALTERNATE FOR PART NUMBER | BOM OPTION | REF DES | COMMENTS:
128S0093 | 128S0092 | ? | C7980,C7940 | KEMET T520V336M016ATE0457650
PART NUMBER | ALTERNATE FOR PART NUMBER | BOM OPTION | REF DES | COMMENTS:
128S0094 | 128S0060 | ? | C7952,C7992 | PANASONIC EEFSX0D331ER
128S0095 | 128S0060 | ? | C7952,C7992 | PANASONIC EEFSX0D331XE
1.5V / 1.05V Power Supply
SYNC_MASTER=POWER
SYNC_DATE=07/13/2005
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART
APPLE COMPUTER INC.
SIZE D
DRAWING NUMBER 051-7173
REV. G
SCALE NONE
SHT 79 OF 108

WWW.AliSaler.Com

POWER CONTROL SIGNALS

These rails are monitored by LTC2908

State	SMC_PM_G2_ENABLE	PM_SLP_S4_L	PM_SLP_S3_L
Run (S0)	1	1	1
Sleep (S3)	1	1	0
Soft-Off (S5)	1	0	0
Battery Off (G3Hot)	0	0	0

5V/3.3V S5 RUN/SS CONTROL

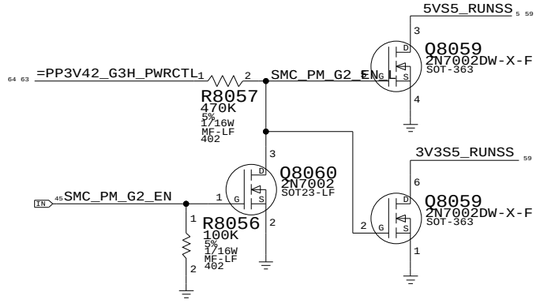

1.5V/1.05V S0 RUN/SS CONTROL

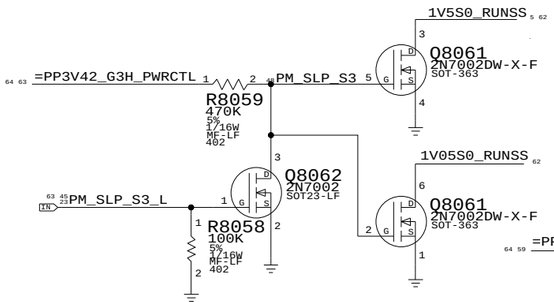

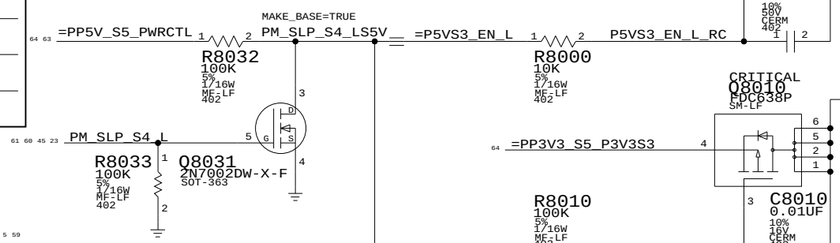

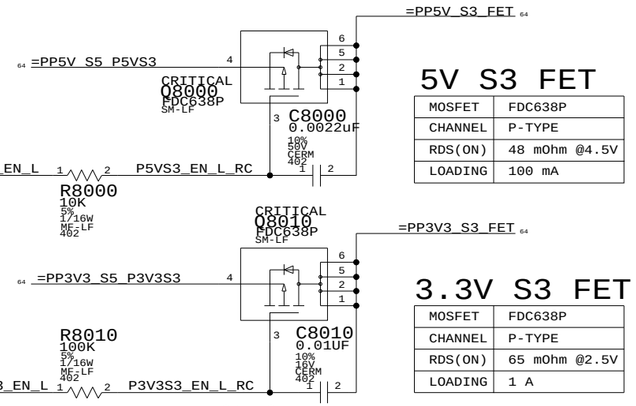

5V S3 FET

MOSFET	FDC638P
CHANNEL	P-TYPE
RDS(ON)	48 mOhm @4.5V
LOADING	100 mA

3.3V S3 FET

MOSFET	FDC638P
CHANNEL	P-TYPE
RDS(ON)	65 mOhm @2.5V
LOADING	1 A

3.425V "G3Hot" SUPPLY

Supply needs to guarantee 3.31V delivered to SMC VRef generator

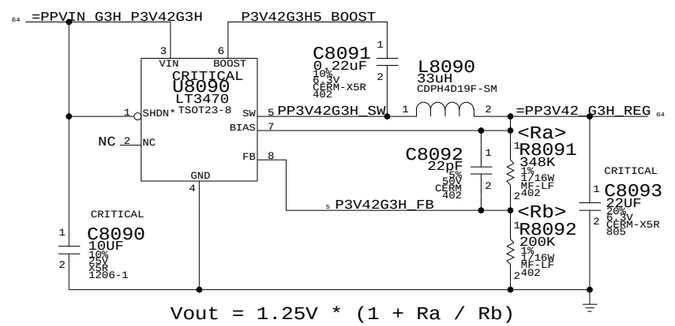

Vout = 1.25V * (1 + Ra / Rb)

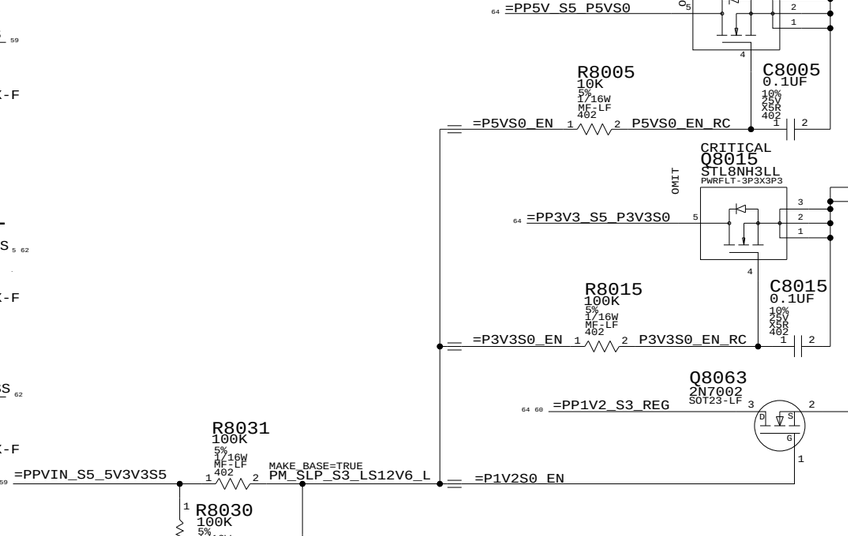

5V S0 FET

MOSFET	STL8NH3LL
CHANNEL	N-TYPE
RDS(ON)	15 mOhm @10V
LOADING	3 A

3.3V S0 FET

MOSFET	STL8NH3LL
CHANNEL	N-TYPE
RDS(ON)	15 mOhm @10V
LOADING	2 A

1.2V S0 FET

MOSFET	2N7002
CHANNEL	N-TYPE
RDS(ON)	13.5 Ohm
LOADING	Nothing

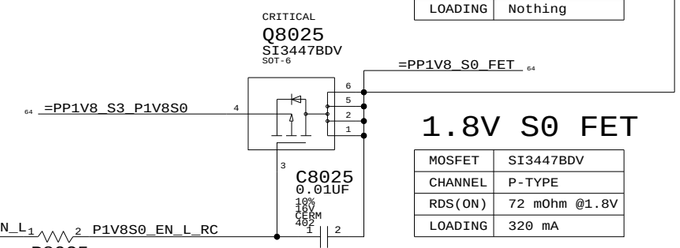

1.8V S0 FET

MOSFET	SI3447BDV
CHANNEL	P-TYPE
RDS(ON)	72 mOhm @1.8V
LOADING	320 mA

ALL SYSTEM PWRGD CIRCUIT

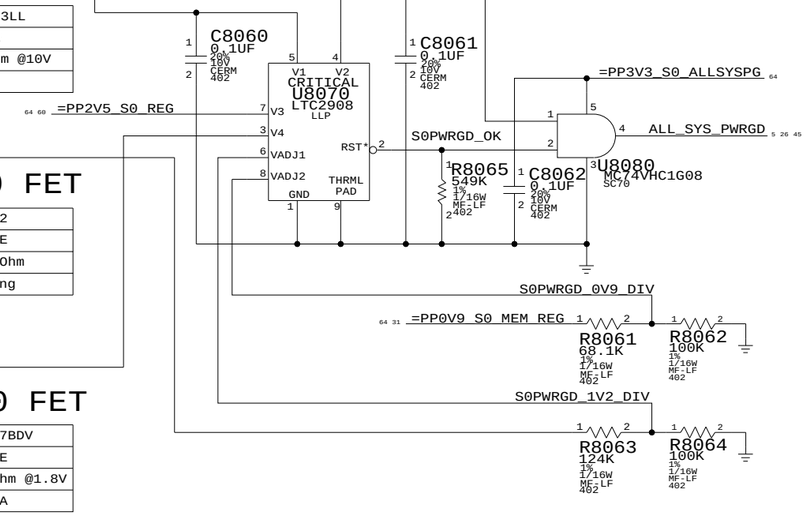

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
376S0445	2	FAIRCHILD FDM6296	Q8005,Q8015	FET_FDN6296

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
376S0448	376S0445	?	Q8005,Q8015	VISHAY SI7806ADN

S3/S0 FETS, G3H SUPPLY

SYNC_MASTER=ENET SYNC_DATE=08/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE SHT 80 OF 108

WWW.AliSaler.Com

"S0" RAILS ONLY ON IN RUN

PPVCORE_CPU_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=0.9V

(REGULATOR OUTPUT CPU VCORE PWR) 58 =PPVOUT_S0_IMVP6_REG
(CPU VCORE PWR) =PPVCORE_S0_CPU 8 9 48

PP0V9_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=0.9V

(LDO OUTPUT 0.9V PWR) 63 31 =PP0V9_S0_MEM_REG
(DDR2 TERMINATION 0.9V PWR) =PP0V9_S0_MEM_TERM 30

PP1V05_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.4MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=1.05V

(REGULATOR OUTPUT 1.05V PWR) 62 5 =PP1V05_S0_REG
(ICH CPU I/O 1.05V PWR) =PP1V05_S0_SB_CPU_IO 21 24 25
(ICH VCORE 1.05V PWR) =PPVCORE_S0_SB 24 25
=PP1V05_S0_CPU_NB_SENSE 62

PP1V05_S0_CPU_NB
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.4MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=1.05V

62 =PP1V05_S0_CPU_NB
(MCH CORE 1.05V PWR) =PPVCORE_S0_NB 16 19
(CPU FSB 1.05V PWR) =PP1V05_S0_CPU 7 8 9 11
(MCH FSB 1.05V PWR) =PP1V05_S0_FSB_NB 12 19 33
=PP1V05_S0_NB_VTT 17 19
(MCH FSB 1.05V PWR) =PP1V05_S0_NB 19

PP1V5_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=1.5V

(REGULATOR OUTPUT 1.5V PWR) 62 =PP1V5_S0_REG
(CPU AVDD 1.5V PWR) =PP1V5_S0_CPU 8 9
(MCH PCIE GRAPHICS O/P COMPENSATION 1.5V PWR) =PP1V5_S0_NB_PCIE 13 19
(MCH DDR DLL&IO, FSB HSIO&IO PWR 1.5V) =PP1V5_S0_NB_VCCAUX 16 17 19
(MCH DIGITAL DIVIDER IN HMPLL 1.5V PWR) =PP1V5_S0_NB_VCCD_HMPLL 17 19
(MCH LVDS DIGITAL 1.5V PWR) =PP1V5_S0_NB_VCCD_LVDS 17 19
(HOST/MEMORY PLL 1.5V PWR) =PP1V5_S0_NB_PLL 19
=PP1V5_S0_NB 19
(MCH TVDAC DEDICATED/QUIET PWR 1.5V) =PP1V5_S0_NB_TVDAC 19
(MCH 3GIO[PCIE/DMI] 1.5V PWR) =PP1V5_S0_NB_3G 19
(MCH 3GIO PLL 1.5V PWR) =PP1V5_S0_NB_3GPLL 19
(ICH LOGIC&IO[ARX] 1.5V PWR) =PP1V5_S0_SB_VCC1_5_A_ARX 24 25
(ICH SATA PLL 1.5V PWR) =PP1V5_S0_SB_VCCSATAPLL 24 25
(ICH LOGIC&IO[ATX] 1.5V PWR) =PP1V5_S0_SB_VCC1_5_A_ATX 24 25
(ICH USB PLL 1.5V PWR) =PP1V5_S0_SB_VCCUSBPLL 24 25
(ICH USB CORE 1.5V PWR) =PP1V5_S0_SB_VCC1_5_A_USB_CORE 24 25
(ICH LOGIC&IO 1.5V PWR) =PP1V5_S0_SB_VCC1_5_A 24 25
=PP1V5_S0_SB 25
(WIRELESS CARD 1.5V PWR) =PP1V5_S0_AIRPORT 43

PP1V8_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=1.8V

(COME FROM S3 TO S0 MOSFET) 63 =PP1V8_S0_FET
(DDR2 TERMINATION REGULATOR 1.8V SWITCH PWR)
(TMDS 1.8V PWR) =PP1V8_S0_TMDS 68

PP2V5_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.5 mm
MIN_NECK_WIDTH=0.25 mm
VOLTAGE=2.5V

(COME FROM S3 TO S0 MOSFET) 63 60 =PP2V5_S0_REG
(MCH H/V SYNC 2.5V PWR) =PP2V5_S0_NB_VCCSYNC 17 19
(MCH LVDS DATA/CLK TX 2.5V PWR) =PP2V5_S0_NB_VCC_TXLVDS 17 19
(MCH PCIE/DMI BAND GAP 2.5V PWR) =PP2V5_S0_NB_VCCA_3GBG 17 19
(MCH LVDS ANALOG 2.5V PWR) =PP2V5_S0_NB_VCCA_LVDS 17 19
(MCH CRTDAC ANALOG 2.5V PWR) =PP2V5_S0_NB_CRTDAC 19
(TMDS 2.5V PWR) =PP2V5_S0_TMDS 68
=PP2V5_S0_NB_DISP_PLL 19

PP3V3_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.30MM
MIN_NECK_WIDTH=0.20MM
VOLTAGE=3.3V

(COME FROM S5 TO S0 MOSFET) 63 =PP3V3_S0_FET
(MCH HV BUFFER 3.3V PWR) =PP3V3_S0_NB_VCC_HV 17 19
=PP3V3_S0_SB 22 25 34
(ICH GPIO PULLS 3.3V PWR) =PP3V3_S0_SB_GPIO 21 23
(ICH IO BUFFER 3.3V PWR) =PP3V3_S0_SB_VCC3_3 24 25
(ICH PCI I/O 3.3V PWR) =PP3V3_S0_SB_VCC3_3_PCI 24 25
(ICH IDE I/O 3.3V PWR) =PP3V3_S0_SB_VCC3_3_IDE 24 25
(ICH PCI PULLS 3.3V PWR) =PP3V3_S0_SB_PCI 26
(ICH PM PULLS 3.3V PWR) =PP3V3_S0_SB_PM 26
(PATA PULLS 3.3V PWR) =PP3V3_S0_PATA 34
(SATA 3.3V PWR) =PP3V3_S0_SMC_LS 46
(MCH PULLS 3.3V PWR) =PP3V3_S0_NB 14 19 20
(ICH LAN I/F 3.3V PWR, NEED TO CHECK INTEL) =PP3V3_S0_SB_VCCLAN3_3 24 25
(ICH INTEL HDA CORE 3.3V PWR) =PP3V3_S0_SB_3V3_1V5_VCCHDA 24 25
(DIMM SPD 3.3V PWR) =PPSPD_S0_MEM 28 29
(CLOCK GENERATOR 3.3V PWR) =PP3V3_S0_CK410 32
(WIRELESS CARD 3.3V PWR) =PP3V3_S0_AIRPORT 43
(TPM 3.3V PWR) =PP3V3_S0_TPM 53
(AUDIO 3.3V PWR) =PP3V3_S0_AUDIO 54 56 57
(TMDS 3.3V PWR) =PP3V3_S0_TMDS 68 69
(CPU THERMAL SENSOR 3.3V PWR) =PP3V3_S0_THRM_SNR 10 49
(ISL6262 3V3) =PP3V3_S0_IMVP6 58
=PP3V3_S0_RSTBUF 26
=PP3V3_S0_SMBUS_SB 27
=PP3V3_S0_SMBUS_SMC_0 27
=PP3V3_S0_SMBUS_SMC_MLB 27
=PP3V3_S0_ALLSYSPG 63
=PP3V3_S0_FAN_RT 5 51
=PP3V3_S0_LCD 67
=PP3V3_S0_PBATTISENS 66
=PP3V3_S0_PDCISENS 62 66
=PP3V3_S0_CPUPOWER 48
=PP3V3_S0_SMBUS_SMC_BSB 27
=PP3V3_S0_1V51V05S0 62
=PP3V3_S0_2V5S0 60
(FIREWIRE DIGITAL 3.3V PWR) =PP3V3_S0_FW 39
=PP3V3_S0_ENET 36

PP5V_S0
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.30 MM
MIN_NECK_WIDTH=0.20 MM
VOLTAGE=5V

(COME FROM S5 TO S0 MOSFET) 63 =PP5V_S0_FET
=PP5V_S0_SB 25
(SATA 5V PWR) =PP5V_S0_SATA 35
(DDR2 TERMINATION) =PP5V_S0_MEMVTT 31
(AUDIO 5V PWR) =PP5V_S0_AUDIO 54 55
(AUDIO SPEAKER 5V PWR) =PP5V_S0_AUDIO_PWR 55
(LPC DEBUG BOARD 5V PWR) =PP5V_S0_LPCPLUS 5 47
(MCH TV 3.3V LDO) =PP5V_S0_NB_TVDAC 19
(ISL6262 VDD) =PP5V_S0_IMVP6 58
(LTC3728LXC EXTVCC) =PP5V_1V51V05S0_VCC 62
(TMDS 5V PWR) =PP5V_S0_TMDS 68 69
=PP5V_S0_FAN_RT 5 51
=PP5V_S0_LCD 67
=PP5V_S0_ISENSECAL 48

"S3" RAILS
ON IN RUN AND SLEEP

PP1V2_S3
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.32MM
VOLTAGE=1.2V

(LDO OUTPUT 1.2V PWR) 63 60 =PP1V2_S3_REG
(ENET 1.2V PWR) =PP1V2_S3_ENET 36

PP1V8_S3
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=1.8V

(REGULATOR OUTPUT 1.8V PWR) 61 =PP1V8_S3_REG
(DDR2 DIMM 1.8V PWR) =PP1V8_S3_MEM 19 28 29
=PP1V8_S3_P1V8S0 63
=PP1V8_S3_MEMVTT 31
=PP1V8_S3_MEM_NB_SENSE 61
=PP1V8_S3_1V2S3 60

PP1V8_S3_MEM_NB
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.4MM
VOLTAGE=1.8V

61 29 28 19 16 14 =PP1V8_S3_MEM_NB
(MCH DDR2 1.8V PWR)

PP2V5_S3
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.5 mm
MIN_NECK_WIDTH=0.25 mm
VOLTAGE=2.5V

(REGULATOR OUTPUT 2.5V PWR) 60 =PP2V5_S3_REG
(ENET 2.5V PWR) =PP2V5_S3_ENET 36

PP3V3_S3
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.2 MM
MIN_NECK_WIDTH=0.16 MM
VOLTAGE=3.3V

(COME FROM S5 TO S3 MOSFET) 63 =PP3V3_S3_FET
=PP3V3_S3_SMBUS_SMC_RMT 27
(ETHERNET 3.3V PWR) =PP3V3_S3_ENET 36
(BLUETOOTH 3.3V PWR) =PP3V3_S3_BT 44
(ACCELEROMETER 3.3V PWR) =PP3V3_S3_SMS 46 52
(TPM 3.3V SUSPEND PWR) =PP3V3_S3_TPM 46 53
(TPS62050 VIN) =PP3V3_S3_2V5S3 60
(FIREWIRE CHIP PCI SIGNAL INDICATOR) =PP3V3_S3_PCI 38
=PP3V3_S3_RSTGATE 26
=PP3V3_S3_AIRPORT_AUX 43
=PP3V3_S3_FW 38
=PP3V3_S3_PDCISENS 61

PP5V_S3
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.3MM
VOLTAGE=5V

(COME FROM S5 TO S3 MOSFET) 63 =PP5V_S3_FET
(ISL6269 PVCC)
(SYSTEM LED PWR) =PP5V_S3_SYSLED 35 46
(USB IO PORT 5V PWR) =PP5V_S3_CAMERA 67
(USB IR CONTROLLER 5V PWR) =PP5V_S3_IR 41
=PP5V_S3_GEYSER 40

"S5" RAILS
ALWAYS ON WHEN UNIT HAS AC POWER (TRICKLE)

PP3V3_S5
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.3MM
VOLTAGE=3.3V

(REGULATOR OUTPUT 3.3V PWR) 59 =PP3V3_S5_REG
=PP3V3_S5_SB 23 25
(ICH USB CTL PULLS 3.3V PWR) =PP3V3_S5_SB_USB 22
(ICH PM 3.3V PWR) =PP3V3_S5_SB_PM 11 23 26
(ICH SUSPEND 3.3V PWR) =PP3V3_S5_SB_VCCSUS3_3 24 25
(ICH SUSPEND USB 3.3V PWR) =PP3V3_S5_SB_VCCSUS3_3_USB 24 25
(ICH SUSPEND PULLS 3.3V PWR) =PP3V3_S5_SB_IO 22
(ICH INTEL HDA SUSPEND 3.3V PWR) =PP3V3_S5_SB_3V3_1V5_VCCSUSHDA 24
(SPI BOOTROM PWR) =PP3V3_S5_ROM 50
=PP3V3_S5_P3V3S3 63
=PP3V3_S5_P3V3S0 63
=PP3V3_S5_FWLATEVG 39
=PP3V3_S5_LCD 67

PP5V_S5
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.3MM
VOLTAGE=5V

(REGULATOR OUTPUT 5 PWR) 59 =PP5V_S5_REG
=PP5V_S5_SB 25
=PP5V_S5_P5VS3 63
=PP5V_S5_PWRCTL 63
=PP5V_S5_P5VS0 63
=PP5V_S5_USB 42
=PP5V_S5_PATA (PATA 5V PWR) 34
=PP5V_S5_1V8S3 61

G3 HOT

PP3V42_G3H
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.2MM
MIN_NECK_WIDTH=0.2MM
VOLTAGE=3.425V

63 =PP3V42_G3H_REG
=PP3V42_G3H_SMCVREF 46
=PP3V42_G3H_SMBUS_SMC_BSA 27
=PP3V42_G3H_PWRCTL 63
=PP3V42_G3H_LIDSWITCH 65
(LPC DEBUG BOARD) =PP3V42_G3H_LPCPLUS 5 47
=PP3V42_G3H_SB_RTC 26
=PP3V42_G3H_ACIN 65 66
(SMC 32.768KHz OSC) =PP3V42_G3H_SMC_CLK 46
(SMC 3.3V PWR) =PP3V42_G3H_SMC 45 46 48

PBUS HOT

PPBUSB_G3H
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.3MM
VOLTAGE=12.6V

66 =PPBUSA_G3H
(INVERTER PBUS PWR)
(ISL6262 VIN)
(LTC3728 VIN) =PPBUS_S5_INV 67
=PPVIN_S5_IMVP6 48 58
=PPVIN_S5_1V51V05S0 62

66 =PPBUSB_G3H
(LTC3728 VIN) =PPVIN_S5_5V3V3S5 59 63
(ISL6269 VIN) =PPVIN_S5_1V8S3 61
(FIREWIRE PORT PBUS PWR) =PPBUS_S5_FWPWRSW 39
(YUKON POWER CONTROL) =PPBUS_S5_YUKON_CTRL 60

PP18V5_G3H
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6 MM
MIN_NECK_WIDTH=0.20 MM
VOLTAGE=18.5V

65 =PP18V5_G3H_INRUSH
(DC-IN OUTPUT 18.5V PWR)
(CHARGER INPUT 18.5V PWR)
(SMC INPUT 18.5V PWR) =PP18V5_G3H_CHGR 66

DCIN G3HOT

PPDCIN_G3H
MAKE_BASE=TRUE
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.3MM
VOLTAGE=18.5V

65 =PPDCIN_G3H
66 =PPVBATT_G3H
=PPVIN_G3H_P3V42G3H 63

GND RAILS

XW8101
SM
57 56 55 54 =GND_AUDIO_CODEC — GND_AUDIO_CODEC (5) — MAKE_BASE=TRUE — 1 2

XW8102
SM
56 55 =GND_AUDIO_PWR — GND_AUDIO_PWR (5) — MAKE_BASE=TRUE — 1 2

Power Conn / Alias

SYNC_MASTER=ENET SYNC_DATE=11/16/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 81 OF 108	

WWW.AliSaler.Com

DC-JACK INTERFACE

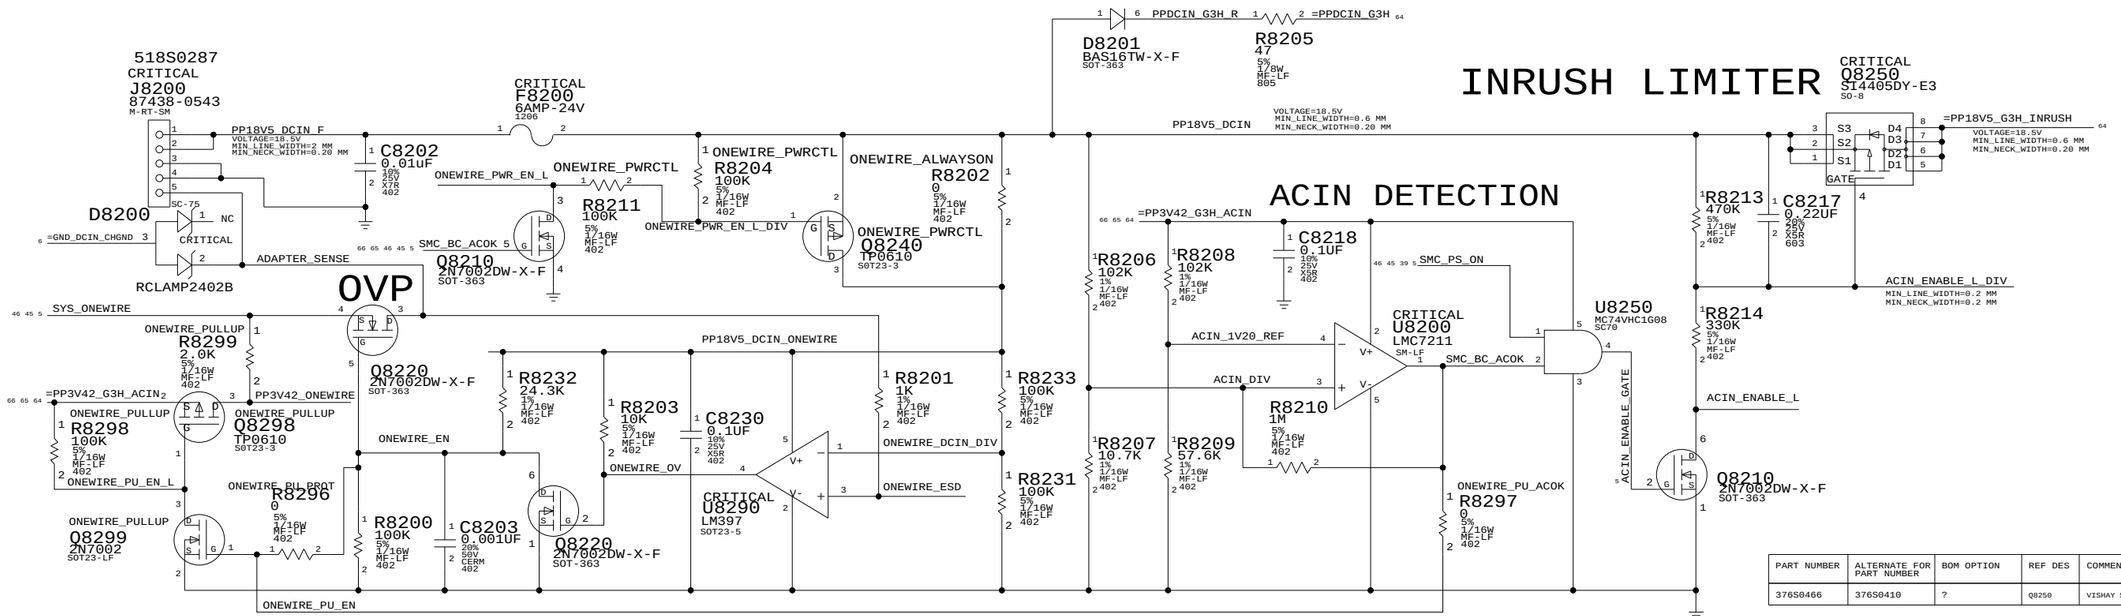

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
376S0466	376S0410	?	Q8250	VISHAY SI4413ADY

BATTERY INTERFACE

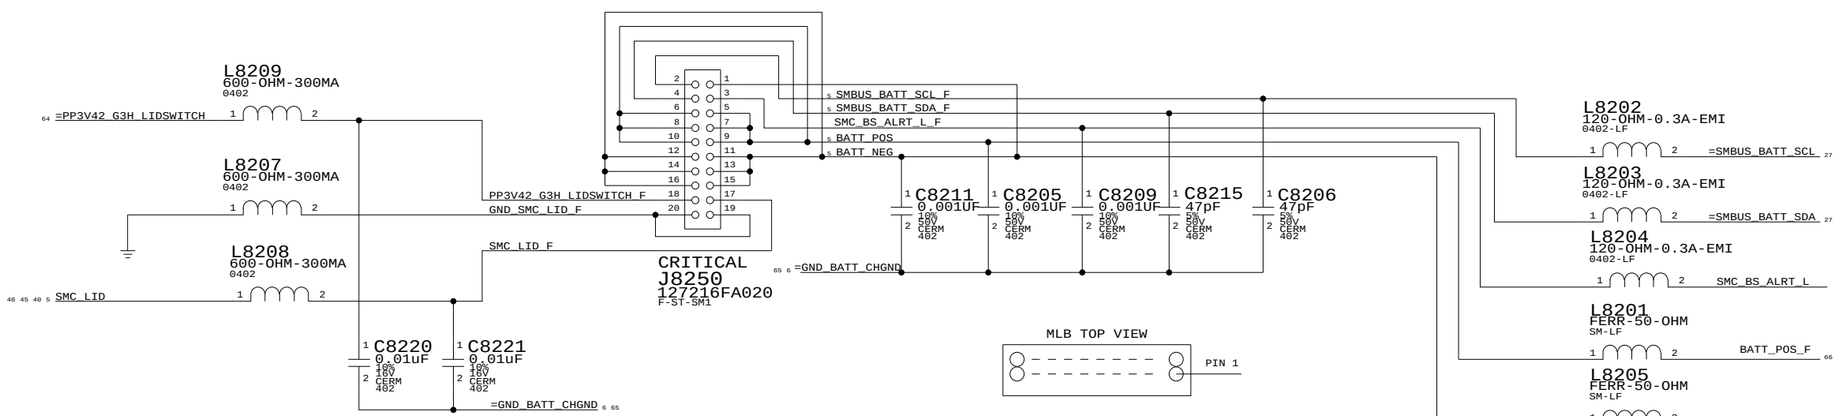

LID HALL EFFECT SENSOR

DC-In & Battery Connectors

SYNC_MASTER=POWER SYNC_DATE=07/13/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE: NONE SHT 82 OF 108

WWW.AliSaler.Com

PBUS SUPPLY / BATTERY CHARGER

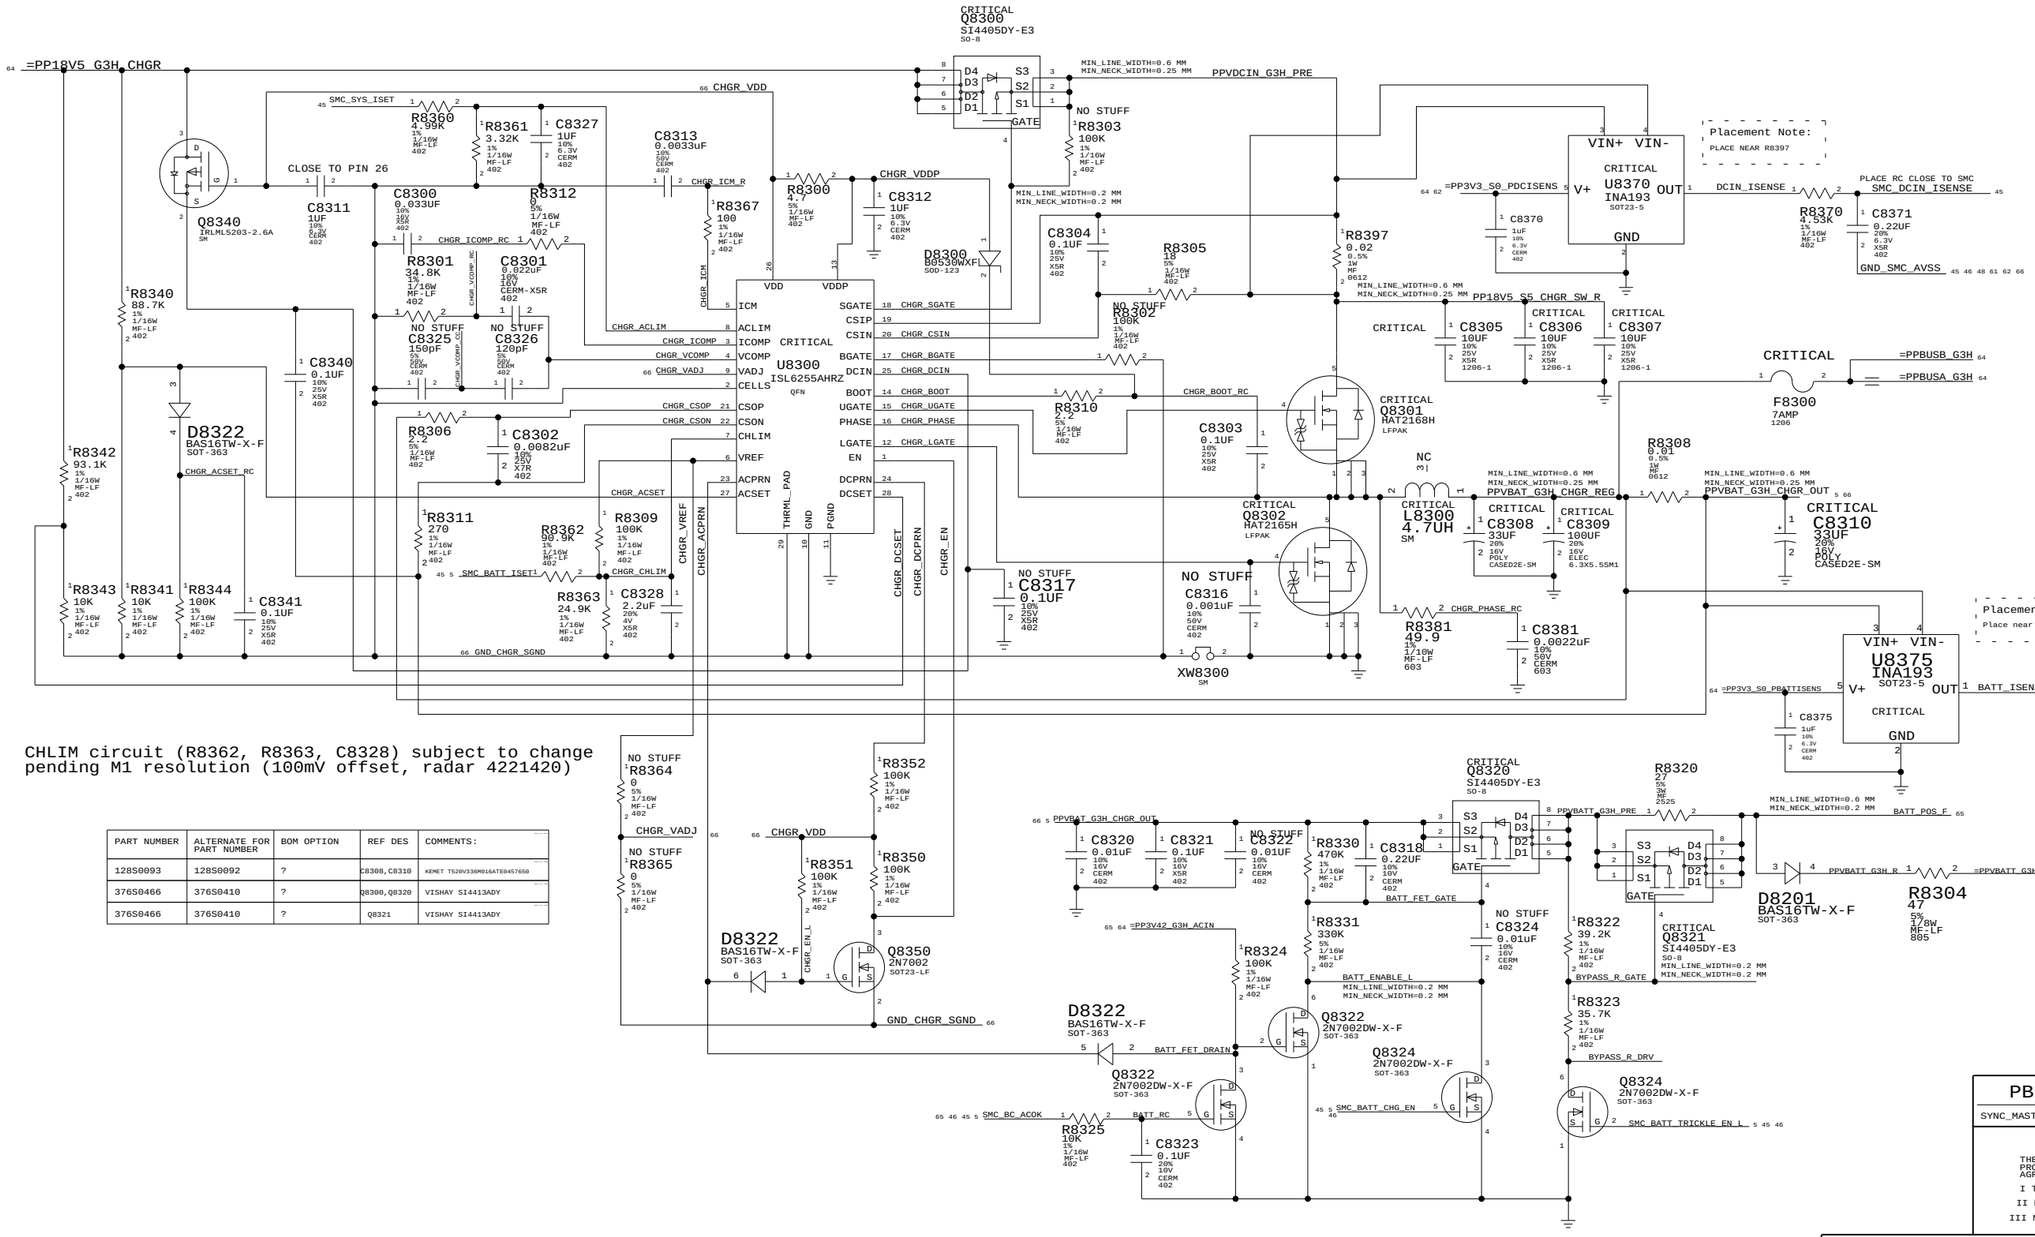

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
128S0093	128S0092	?	C8308,C8310	KEMET T520V336M016ATE045/650
376S0466	376S0410	?	Q8300,Q8320	VISHAY SI4413ADY
376S0466	376S0410	?	Q8321	VISHAY SI4413ADY

PBUS Supply/Battery Charger

SYNC_MASTER=SMC SYNC_DATE=08/19/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 83 OF 108	

WWW.AliSaler.Com

INVERTER CONNECTOR

=PP5V_S0_LCD
R9400 100K 1% 1/16W MF-LF 402
R9401 100K 1% 1/16W MF-LF 402
INV_PWREN_F_L
INV_PWREN_L
Q9405 TP0610 SOT23-3
Q9406 2N7002 SOT23-LF
LVDS_BKLTEN
C9414 0.0022UF 10% 50V CERM 402
PP5V_INV
MIN_LINE_WIDTH=0.30 MM
MIN_NECK_WIDTH=0.20 MM
VOLTAGE=5V

L9403 FERR-120-OHM-1.5A 0402-LF
=PPBUS_S5_INV
PPBUS_ALL_INV_CONN
VOLTAGE=12.6V
MIN_LINE_WIDTH=0.30 MM
MIN_NECK_WIDTH=0.20 MM
L9402 FERR-120-OHM-1.5A 0402-LF
L9400 120-OHM-0.3A-EMI 0402-LF
PP5V_INV_F
VOLTAGE=5V
MIN_LINE_WIDTH=0.30 MM
MIN_NECK_WIDTH=0.20 MM
L9401 120-OHM-0.3A-EMI 0402-LF

CRITICAL
J9400 88609-04001 F-ST-SM
INV_GND
INV_BKLIGHT_PWM_L

REPLACE 518S0334 WITH 518S0486

=PP3V3_S0_LCD
INVERTER_BUF
MC74VHC1G08 SC70
U9453
LVDS_BKLTCTL
C9459 0.1UF 10% 16V X5R 402
INVERTER_UNBUF
R9428 0 5% 1/10W MF-LF 402
BKLIGHT_CTL

C9401 100PF 5% 50V CERM 402
C9402 100PF 5% 50V CERM 402
C9403 100PF 5% 50V CERM 402
C9400 100PF 5% 50V CERM 402
INVT_CHGND
THIS GND CONECTS TO CHASSIS GND

LCD + CAMERA CONNECTOR

=PP3V3_S5_LCD
R9402 100K 5% 1/16W MF-LF 402
R9423 10K 5% 1/16W MF-LF 402
LCDVDD_PWREN_L
LCDVDD_PWREN_L_R
Q9404 2N7002 SOT23-LF
LVDS_VDDEN
R9414 100K 1% 1/16W MF-LF 402

Q9403 FDC638P SM-LF
C9411 0.1UF 10% 16V X5R 402
C9412 10UF 20% 6.3V X5R 603
PP3V3_LCDVDD_SW
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.30 MM
MIN_NECK_WIDTH=0.20 MM
C9413 0.0033UF 10% 50V CERM 402

=PP3V3_S0_LCD
R9408 10K 5% 1/16W MF-LF 402
R9409 10K 5% 1/16W MF-LF 402
LVDS_DDC_CLK
LVDS_DDC_DATA

L9404 FERR-120-OHM-1.5A 0402-LF
PP3V3_LCDVDD_SW_F
VOLTAGE=3.3V MIN_LINE_WIDTH=0.30 MM MIN_NECK_WIDTH=0.20 MM
L9408 120-OHM-0.3A-EMI 0402-LF
PP3V3_S0_LCD_F (LVDS_DDC_POWER)
VOLTAGE=3.3V MIN_LINE_WIDTH=0.25 MM MIN_NECK_WIDTH=0.20 MM

C9409 0.001uF 10% 50V CERM 402
CRITICAL
J9401 S-050162B F-RT-SM
=GND_CHASSIS_LVDS
LVDS_A_DATA_N<0>
LVDS_A_DATA_P<0>
LVDS_A_DATA_N<1>
LVDS_A_DATA_P<1>
LVDS_A_DATA_N<2>
LVDS_A_DATA_P<2>
LVDS_A_CLK_N
LVDS_A_CLK_P
LCD I/F
CAMERA I/F

=PP3V3_S0_LCD
NOSTUFF
R9415 10K 5% 1/16W MF-LF 402
R9416 10K 5% 1/16W MF-LF 402
LVDS_CLKCTLA
LVDS_CLKCTLB

CRITICAL
L9407 90-OHM SM SYM_VER-1
=USB2_CAMERA_P
=USB2_CAMERA_N
USB2_CAMERA_CONN_P
USB2_CAMERA_CONN_N
L9405 FERR-120-OHM-1.5A 0402-LF
=PP5V_S3_CAMERA
PP5V_S3_CAMERA_F
VOLTAGE=5V
MIN_NECK_WIDTH=0.20 MM
MIN_LINE_WIDTH=0.30 MM
=SMBUS_ATS_SCL
=SMBUS_ATS_SDA

C9416 0.001uF 10% 50V CERM 402
C9415 0.001uF 10% 50V CERM 402
C9410 0.001uF 10% 50V CERM 402
C9408 0.001uF 10% 50V CERM 402

Plexi: 516S0212
*Enclosure: 518S0364

LVDS REFERENCE CURRENT,1.5K OHM PULL DOWN RESISTOR NEEDED
LVDS_VREFH
LVDS_VREFL
LVDS_IBG
R9413 1.5K 1% 1/16W MF-LF 402

INVERTER,LVDS,TMDS

SYNC_MASTER=GRAPHIC SYNC_DATE=06/06/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 94 OF 108	

WWW.AliSaler.Com

L9506
120-OHM-0.3A-EMI
=PP3V3_S0_TMDS
0402-LF
PP3V3_S0_ANALOG_TMDS_F
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM
C9536 0.001UF 10% 50V CERM 402
C9537 0.001UF 10% 50V CERM 402
C9538 0.1UF 10% 16V X5R 402
C9539 0.1UF 10% 16V X5R 402
C9540 10UF 20% 6.3V X5R 603
ONE 0.1UF AND 0.001UF FOR EACH PIN

L9503
120-OHM-0.3A-EMI
=PP3V3_S0_TMDS
0402-LF
PP3V3_S0_ANALOG_SDVO_F
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.3MM
MIN_NECK_WIDTH=0.25MM
C9530 0.001UF 10% 50V CERM 402
C9531 0.1UF 10% 16V X5R 402
C9514 0.1UF 10% 16V X5R 402

L9504
120-OHM-0.3A-EMI
=PP3V3_S0_TMDS
0402-LF
PP3V3_S0_PVCC1_TMDS_F
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.3MM
MIN_NECK_WIDTH=0.25MM
C9532 0.001UF 10% 50V CERM 402
C9533 0.1UF 10% 16V X5R 402
C9506 0.1UF 10% 16V X5R 402

L9505
120-OHM-0.3A-EMI
=PP3V3_S0_TMDS
0402-LF
PP3V3_S0_PVCC2_TMDS_F
VOLTAGE=3.3V
MIN_LINE_WIDTH=0.3MM
MIN_NECK_WIDTH=0.25MM
C9534 0.001UF 10% 50V CERM 402
C9535 0.1UF 10% 16V X5R 402

L9501
120-OHM-0.3A-EMI
=PP1V8_S0_TMDS
0402-LF
PP1V8_S0_TMDS_F
VOLTAGE=1.8V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM
C9507 0.1UF 10% 16V X5R 402
C9508 0.001UF 10% 50V CERM 402
C9509 0.1UF 10% 16V X5R 402
C9510 0.001UF 10% 50V CERM 402
C9511 0.1UF 10% 16V X5R 402
C9512 0.001UF 10% 50V CERM 402
C9513 10UF 20% 6.3V X5R 603
ONE 0.1UF AND 0.001UF FOR EACH PIN

L9500
120-OHM-0.3A-EMI
=PP1V8_S0_TMDS
0402-LF
PP1V8_S0_ANALOG_SDVO_F
VOLTAGE=1.8V
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM
C9500 0.001UF 10% 50V CERM 402
C9501 0.001UF 10% 50V CERM 402
C9502 0.1UF 10% 16V X5R 402
C9503 0.1UF 10% 16V X5R 402
C9504 10UF 20% 6.3V X5R 603
ONE 0.1UF AND 0.001UF FOR EACH PIN

R9507 49.9 1% 1/10W MF-LF 402
R9537 49.9 1% 1/10W MF-LF 402
TMDS_TX_P<0>
TMDS_TX<0>
TMDS_TX_N<0>
C9522 0.001UF 10% 50V CERM 402

R9508 49.9 1% 1/10W MF-LF 402
R9538 49.9 1% 1/10W MF-LF 402
TMDS_TX_P<1>
TMDS_TX<1>
TMDS_TX_N<1>
C9523 0.001UF 10% 50V CERM 402

R9509 49.9 1% 1/10W MF-LF 402
R9539 49.9 1% 1/10W MF-LF 402
TMDS_TX_P<2>
TMDS_TX<2>
TMDS_TX_N<2>
C9524 0.001UF 10% 50V CERM 402

R9510 49.9 1% 1/10W MF-LF 402
R9540 49.9 1% 1/10W MF-LF 402
TMDS_TX_CLK_P
TMDS_TX_CLK
TMDS_TX_CLK_N
NOSTUFF
C9526 10pF 5% 50V CERM 402
C9525 0.001UF 10% 50V CERM 402
NOSTUFF
C9527 10pF 5% 50V CERM 402

C9526,C9527 close to CHIP

MCH SDVO CHANNEL R,G,B,CLK SIGNAL TO TMDS CHIP
PLACE THE CAP NEAR THE NB SIDE
PEG_R2D_C_P<0>
PEG_R2D_C_N<0>
PEG_R2D_C_P<1>
PEG_R2D_C_N<1>
PEG_R2D_C_P<2>
PEG_R2D_C_N<2>
PEG_R2D_C_P<3>
PEG_R2D_C_N<3>
C9541 0.1UF 10% 16V X5R 402
C9542 0.1UF 10% 16V X5R 402
C9543 0.1UF 10% 16V X5R 402
C9544 0.1UF 10% 16V X5R 402
C9545 0.1UF 10% 16V X5R 402
C9546 0.1UF 10% 16V X5R 402
C9547 0.1UF 10% 16V X5R 402
C9548 0.1UF 10% 16V X5R 402

PP3V3_S0_ANALOG_SDVO_F
PP1V8_S0_ANALOG_SDVO_F
PP3V3_S0_PVCC2_TMDS_F
PP3V3_S0_PVCC1_TMDS_F
PP3V3_S0_ANALOG_TMDS_F
PP1V8_S0_TMDS_F

U9500
CRITICAL
SIL1362ACLU
LQFP
SDVO RCVR CORE
DIFF SIG DATA
I2C MASTER INTER
CONFIG/ PRGRM
TEST MODE

TMDS_SDR_P
TMDS_SDR_N
TMDS_SDG_P
TMDS_SDG_N
TMDS_SDB_P
TMDS_SDB_N
TMDS_SDC_P
TMDS_SDC_N
TMDS_INT_P
TMDS_INT_N
TMDS_EXT_RES
TMDS_RST_L
SDVO_CTRLCLK
SDVO_CTRLDATA
TMDS_HTPLG_R

=PP3V3_S0_TMDS
C9521 0.1UF 10% 16V X5R 402
C9505 10UF 20% 6.3V X5R 603

PP3V3_S0_ANALOG_TMDS_F
R9504 249 1% 1/16W MF-LF 402
=PP3V3_S0_TMDS
R9505 10K 5% 1/16W MF-LF 402
R9506 10K 5% 1/16W MF-LF 402
TMDS_I2C_SCL
TMDS_I2C_SDA
TMDS_I2C_SCL AND TMDS_I2C_SDA DON'T NEED TO CONNECT

PLACE IT CLOSE TO CONNECTOR
=PP5V_S0_TMDS
D9500 BAV99DW-X-F SOT-363
=PP2V5_S0_TMDS
R9501 3.3K 5% 1/16W MF-LF 402
R9502 3.3K 5% 1/16W MF-LF 402
C9519 0.1UF 10% 16V X5R 402
C9520 0.1UF 10% 16V X5R 402
PEG_D2R_P<1>
PEG_D2R_N<1>
TMDS CHIP SDVO INPUT INTERRUPT SIGNAL TO MCH
R9500 2.2K 5% 1/16W MF-LF 402
TMDS_HTPLG
R9503 1K 5% 1/16W MF-LF 402

NC
D9500 BAV99DW-X-F SOT-363
PP5V_S0_DVIPORT
PP5V_S0_DVIPORT_D

EXTERNAL TMDS

SYNC_MASTER=GRAPHIC SYNC_DATE=06/06/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G
SCALE: NONE	SHT 95 OF 108	

WWW.AliSaler.Com

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
155S0227	155S0164	?	L9805,L9806,L9807	KEEP MAG.LAYER IN BOM

Video Connectors

EXTERNAL VIDEO (VGA) INTERFACE

Isolation required for DVI power switch

=PP3V3_S0_TMDS 64 68 69

R9821 2.2K 5% 1/10W MF-LF 402

R9822 2.2K 5% 1/10W MF-LF 402

Q9801 2N7002DW-X-F SOT-363

GPU_CRT_DDC_CLK 69

Q9801 2N7002DW-X-F SOT-363

13 IO CRT_DDC_CLK

13 IO CRT_DDC_DATA

GPU_CRT_DDC_DATA 69

TMDS(MINI DVI) INTERFACE

F9804 0.5AMP-13.2V SM-LF

68 64 =PP5V_S0_TMDS

VOLTAGE=5V MIN_LINE_WIDTH=0.5 MM MIN_NECK_WIDTH=0.25 MM

PP5V_S0_TMDS_FUSE

L9844 400-OHM-EMI SM-1

VOLTAGE=5V MIN_LINE_WIDTH=0.5 MM MIN_NECK_WIDTH=0.25 MM

PP5V_S0_DVIPORT 68 69

VOLTAGE=5V MIN_LINE_WIDTH=0.5 MM MIN_NECK_WIDTH=0.25 MM

C9804 0.1UF 20% 16V CERM 402

=GND_CHASSIS_TMDS_UPPER 6 69

PLACE THE RESISTOR CLOSE TO GMCH AND THE CAP NEAR CONNECTOR

=PP3V3_S0_TMDS 64 68 69

C9860 0.1UF 20% 16V CERM 402

U9804 SN74LVC2G125DCU US8

13 CRT_HSYNC_R

R9860 39 5% 1/10W MF-LF 402

CRT_HSYNC_LS_R

CRT_HSYNC_LS

R9870 39 5% 1/10W MF-LF 402

VGA_HSYNC 69

NOSTUFF C9842 33PF 50V CERM 402

PLACE THE RESISTOR CLOSE TO GMCH AND THE CAP NEAR THE CONNECTOR

U9804 SN74LVC2G125DCU US8

13 CRT_VSYNC_R

R9861 39 5% 1/10W MF-LF 402

CRT_VSYNC_LS_R

CRT_VSYNC_LS

R9871 39 5% 1/10W MF-LF 402

VGA_VSYNC 69

NOSTUFF C9843 33PF 50V CERM 402

A 255 OHM 1% RESISTOR IS REQUIRED BETWEEN CRT_IREF AND GROUND

13 CRT_IREF

R9869 255 1% 1/16W MF-LF 402

TV REFERENCE CURRENT,USES AN EXTERNAL RESISTOR OF 5K OHM 1% TO SET INTERNAL VOLTAGE LEVELS

13 TV_IREF

R9868 4.99K 1% 1/10W MF-LF 402

PP5V_S0_DVIPORT_D 68

DVI power DIODE on page 95 (D9500)

R9862 2.2K 5% 1/10W MF-LF 402

R9863 2.2K 5% 1/10W MF-LF 402

68 TMDS_HTPLG

C9808 0.001uF 10% 50V CERM 402

69 GPU_CRT_DDC_CLK

C9809 100pF 5% 50V CERM 402

69 GPU_CRT_DDC_DATA

C9812 100pF 5% 50V CERM 402

OMIT CRITICAL J9801 MINI-DVI RT-TH

69 68 PP5V_S0_DVIPORT

NC NC

VGA_B 69

VGA_HSYNC 69

VGA_G 69

VGA_VSYNC 69

VGA_R 69

TMDS_TX_CONN_P<2>

TMDS_TX_CONN_N<2>

TMDS_TX_CONN_P<1>

TMDS_TX_CONN_N<1>

TMDS_TX_CONN_P<0>

TMDS_TX_CONN_N<0>

TMDS_TX_CONN_CLK_P

TMDS_TX_CONN_CLK_N

CRITICAL L9805 90-OHM-300MA 2012H SYM_VER-1

TMDS_TX_P<2> 68

TMDS_TX_N<2> 68

CRITICAL L9807 90-OHM-300MA 2012H SYM_VER-1

TMDS_TX_P<1> 68

TMDS_TX_N<1> 68

CRITICAL L9806 90-OHM-300MA 2012H SYM_VER-1

TMDS_TX_P<0> 68

TMDS_TX_N<0> 68

CRITICAL L9804 370-OHM-280MA SM1 SYM_VER-1

TMDS_TX_CLK_P 68

TMDS_TX_CLK_N 68

69 6 =GND_CHASSIS_TMDS_UPPER

6 =GND_CHASSIS_TMDS_DOWN

NOSTUFF C9821 0.1UF 10% 16V X5R 402

PLACE THE RESISTOR CLOSE TO GMCH

13 TV_DACA_OUT

13 CRT_BLUE

R9850 75 1% 1/16W MF-LF 402

R9851 75 1% 1/16W MF-LF 402

13 TV_IRTNA

13 CRT_BLUE_L

69 68 64 =PP3V3_S0_TMDS

C9839 0.1UF 10% 16V X5R 402

CRITICAL U9801 TS3V330 SOP

16 VCC

2 S1A

3 S2A

5 S1B

6 S2B

11 S1C

10 S2C

14 S1D

13 S2D

4 DA

7 DB

9 DC

12 DD

1 IN

15 EN_L

8 GND

PLACE THE RESISTOR CLOSE TO GMCH

13 TV_DACB_OUT

13 CRT_GREEN

R9852 75 1% 1/16W MF-LF 402

R9853 75 1% 1/16W MF-LF 402

13 TV_IRTNB

13 CRT_GREEN_L

EXT_COMPVID_B

EXT_Y_G

EXT_C_R

NOSTUFF R9856 150 1% 1/16W MF-LF 402

NOSTUFF R9864 150 1% 1/16W MF-LF 402

NOSTUFF R9859 150 1% 1/16W MF-LF 402

FL9800 LCFILTER SM-220MHZ-LF

FL9801 LCFILTER SM-220MHZ-LF

FL9802 LCFILTER SM-220MHZ-LF

C9824 3.3PF 0.25% 50V CERM 402

C9834 3.3PF 0.25% 50V CERM 402

C9820 3.3PF 0.25% 50V CERM 402

PLACE THE RESISTOR CLOSE TO GMCH

13 TV_DACC_OUT

13 CRT_RED

R9854 75 1% 1/16W MF-LF 402

R9855 75 1% 1/16W MF-LF 402

13 TV_IRTNC

13 CRT_RED_L

6 =SB_GPIO22

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
514-0292	1	CONN,32P MINI-DVI RCPT,RA,MG3,LF	J9801	CRITICAL	NORMAL
514-0319	1	CONN,32P MINI-DVI RCPT,RA,BLACK,LF	J9801	CRITICAL	FANCY

MINI-DVI CONNECTOR

SYNC_MASTER=EUGENE SYNC_DATE=05/21/05

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-7173	G

SCALE NONE SHT 98 OF 108

WWW.AliSaler.Com

Title: Basenet Report
Design: m42a
Date: Aug 5 16:01:17 2006

Base nets and synonyms for m42a_lib.M42A(@m42a_lib.m42a(sch_1))

Base Signal	Synonyms	Location([Zone][dir])
1V2_FB	1V2_FB - @m42a_lib.M42A	60A3
1V05S0_BG	1V05S0_BG - @m42a_lib.M42A	62B4
1V05S0_BOOST	1V05S0_BOOST - @m42a_lib.M42A	62B4
1V05S0_BOOST_RC	1V05S0_BOOST_RC - @m42a_lib.M42A	62C3
1V05S0_COMP	1V05S0_COMP - @m42a_lib.M42A	5D7
1V05S0_FSET	1V05S0_FSET - @m42a_lib.M42A	5D7
1V05S0_ITH	1V05S0_ITH - @m42a_lib.M42A	62B4
1V05S0_ITH_RC	1V05S0_ITH_RC - @m42a_lib.M42A	62B3
1V05S0_RUNSS	1V05S0_RUNSS - @m42a_lib.M42A	62B4 63B7
1V05S0_SNS_N	1V05S0_SNS_N - @m42a_lib.M42A	62C3
1V05S0_SNS_P	1V05S0_SNS_P - @m42a_lib.M42A	62C3
1V05S0_SW	1V05S0_SW - @m42a_lib.M42A	62B4
1V05S0_TG	1V05S0_TG - @m42a_lib.M42A	62C4
1V05S0_VOSNS	1V05S0_VOSNS - @m42a_lib.M42A	62B4
1V5S0_BG	1V5S0_BG - @m42a_lib.M42A	62B5
1V5S0_BOOST	1V5S0_BOOST - @m42a_lib.M42A	62B5
1V5S0_BOOST_RC	1V5S0_BOOST_RC - @m42a_lib.M42A	62C6
1V5S0_ITH	1V5S0_ITH - @m42a_lib.M42A	62B5
1V5S0_ITH_RC	1V5S0_ITH_RC - @m42a_lib.M42A	62B5
1V5S0_RUNSS	1V5S0_RUNSS - @m42a_lib.M42A	5D7 62B5 63B7
1V5S0_SNS_N	1V5S0_SNS_N - @m42a_lib.M42A	62C6
1V5S0_SNS_P	1V5S0_SNS_P - @m42a_lib.M42A	62C6
1V5S0_SW	1V5S0_SW - @m42a_lib.M42A	62B5
1V5S0_TG	1V5S0_TG - @m42a_lib.M42A	62C5
1V5S0_VOSNS	1V5S0_VOSNS - @m42a_lib.M42A	62B5
1V8S3_BOOT	1V8S3_BOOT - @m42a_lib.M42A	61B5
1V8S3_BOOT_RC	1V8S3_BOOT_RC - @m42a_lib.M42A	61C4
1V8S3_COMP	1V8S3_COMP - @m42a_lib.M42A	5D7 61B6
1V8S3_COMP_R	1V8S3_COMP_R - @m42a_lib.M42A	61B6
1V8S3_FB	1V8S3_FB - @m42a_lib.M42A	61B6
1V8S3_FCCM	1V8S3_FCCM - @m42a_lib.M42A	61B6
1V8S3_FSET	1V8S3_FSET - @m42a_lib.M42A	5D7 61C6
1V8S3_ISEN	1V8S3_ISEN - @m42a_lib.M42A	61B5
1V8S3_LG	1V8S3_LG - @m42a_lib.M42A	61B5
1V8S3_PHASE	1V8S3_PHASE - @m42a_lib.M42A	61B5
1V8S3_UG	1V8S3_UG - @m42a_lib.M42A	61C5
1V8S3_VCC	1V8S3_VCC - @m42a_lib.M42A	61C6
1V51V05S0_FCB	1V51V05S0_FCB - @m42a_lib.M42A	62A3 62B5
1V51V05S0_FSEL	1V51V05S0_FSEL - @m42a_lib.M42A	62A2 62B4
1V51V05S0_PGOOD	1V51V05S0_PGOOD - @m42a_lib.M42A	58C7 62A1 63C2
2V5S0_BP	2V5S0_BP - @m42a_lib.M42A	60C3
2V5S3_BP	2V5S3_BP - @m42a_lib.M42A	60C3
3V3S5_BG	3V3S5_BG - @m42a_lib.M42A	59B5
3V3S5_BOOST	3V3S5_BOOST - @m42a_lib.M42A	59B5
3V3S5_BOOST_RC	3V3S5_BOOST_RC - @m42a_lib.M42A	59C6
3V3S5_COMP	3V3S5_COMP - @m42a_lib.M42A	5D7
3V3S5_FSET	3V3S5_FSET - @m42a_lib.M42A	5D7
3V3S5_ITH	3V3S5_ITH - @m42a_lib.M42A	59B5
3V3S5_ITH_RC	3V3S5_ITH_RC - @m42a_lib.M42A	59B5
3V3S5_RUNSS	3V3S5_RUNSS - @m42a_lib.M42A	59B5 63C7
3V3S5_SNS_N	3V3S5_SNS_N - @m42a_lib.M42A	59C6
3V3S5_SNS_P	3V3S5_SNS_P - @m42a_lib.M42A	59C6
3V3S5_SW	3V3S5_SW - @m42a_lib.M42A	59B5
3V3S5_TG	3V3S5_TG - @m42a_lib.M42A	59C5
3V3S5_VOSNS	3V3S5_VOSNS - @m42a_lib.M42A	59B5
3V3V3S5_FCB	3V3V3S5_FCB - @m42a_lib.M42A	59A3 59B5
3V3V3S5_FSEL	3V3V3S5_FSEL - @m42a_lib.M42A	59A2 59B4
5V5S_BG	5V5S_BG - @m42a_lib.M42A	59B4
5V5S_BOOST	5V5S_BOOST - @m42a_lib.M42A	59B4
5V5S_BOOST_RC	5V5S_BOOST_RC - @m42a_lib.M42A	59C3
5V5S_ITH	5V5S_ITH - @m42a_lib.M42A	59B4
5V5S_ITH_RC	5V5S_ITH_RC - @m42a_lib.M42A	59B3
5V5S_RUNSS	5V5S_RUNSS - @m42a_lib.M42A	5D7 59B4 63C7
5V5S_SNS_N	5V5S_SNS_N - @m42a_lib.M42A	59C3
5V5S_SNS_P	5V5S_SNS_P - @m42a_lib.M42A	59C3
5V5S_SW	5V5S_SW - @m42a_lib.M42A	59B4
5V5S_TG	5V5S_TG - @m42a_lib.M42A	59C4
5V5S_VOSNS	5V5S_VOSNS - @m42a_lib.M42A	59B4
5V_REG_IN	5V_REG_IN - @m42a_lib.M42A	54A5
=EXTBUSB_OC_L	=EXTBUSB_OC_L - @m42a_lib.M42A	6C2 42C8
	USB_C_OC_L - @m42a_lib.M42A	6C1 22C4 22D8
	EXTBUSB_OC_L - @m42a_lib.M42A	6C2
=FWPWR_PWRON	=FWPWR_PWRON - @m42a_lib.M42A	6D2 39C6
	NC_FWPWR_PWRON - @m42a_lib.M42A	6D1
=GND_BATT_CHGND	=GND_BATT_CHGND - @m42a_lib.M42A	6D8 65A6 65A6
	=GND_CHASSIS_AUDIO_JACK - @m42a_lib.M42A	6D8 56B8
	=GND_CHASSIS_AUDIO_MIC - @m42a_lib.M42A	6D8 57A6
	=GND_CHASSIS_DIPDIMM_LEFT - @m42a_lib.M42A	6D8 28A5
	GND_CHASSIS_IO - @m42a_lib.M42A	6C7 6D7
	=GND_CHASSIS_USB - @m42a_lib.M42A	6C8 42A2 42A4 42C2 42C4
	=GND_CHASSIS_FW_DOWN - @m42a_lib.M42A	6C8 39A1
	GND_CHASSIS_IO - @m42a_lib.M42A	6C7 6D7
	=GND_CHASSIS_USB - @m42a_lib.M42A	6C8 42A2 42A4 42C2 42C4
	=GND_CHASSIS_FW_DOWN - @m42a_lib.M42A	6C8 39A1
	=GND_CHASSIS_DIPDIMM_LEFT - @m42a_lib.M42A	6D8 28A5
	=GND_CHASSIS_AUDIO_SPKRCONN - @m42a_lib.M42A	6D8
	=GND_CHASSIS_AUDIO_SHIELD3 - @m42a_lib.M42A	6D8
	=GND_CHASSIS_AUDIO_SHIELD2 - @m42a_lib.M42A	6D8
	=GND_CHASSIS_AUDIO_SHIELD1 - @m42a_lib.M42A	6D8
	=GND_CHASSIS_AUDIO_MIC - @m42a_lib.M42A	6D8 57A6
	=GND_CHASSIS_AUDIO_JACK - @m42a_lib.M42A	6D8 56B8
=GND_CHASSIS_DIPDIMM_CENTER	=GND_CHASSIS_DIPDIMM_CENTER - @m42a_lib.M42A	6B8 28D5 29A5
=GND_CHASSIS_DIPDIMM_RIGHT	=GND_CHASSIS_DIPDIMM_RIGHT - @m42a_lib.M42A	6B8 29D4
	GND_CHASSIS_CENTER - @m42a_lib.M42A	6B7
	GND_CHASSIS_RIGHT - @m42a_lib.M42A	6B7
=GND_CHASSIS_FW_UPPER	=GND_CHASSIS_FW_UPPER - @m42a_lib.M42A	6A6 39A1
	=GND_CHASSIS_TMDS_DOWN - @m42a_lib.M42A	6A6 69A3
	GND_CHASSIS_IO1 - @m42a_lib.M42A	6A5
	=GND_CHASSIS_TMDS_DOWN - @m42a_lib.M42A	6A6 69A3
=GND_CHASSIS_LVDS	=GND_CHASSIS_LVDS - @m42a_lib.M42A	6C8 67A2 67B2
	GND_CHASSIS_SATA - @m42a_lib.M42A	6C7 35C8
=GND_CHASSIS_RJ45	=GND_CHASSIS_RJ45 - @m42a_lib.M42A	6C8 37A4
	=GND_CHASSIS_TMDS_UPPER - @m42a_lib.M42A	6C8 69A4 69C3
	GND_CHASSIS_DCIN - @m42a_lib.M42A	6C7
	=GND_DCIN_CHGND - @m42a_lib.M42A	6C8 65C8
	GND_CHASSIS_DCIN - @m42a_lib.M42A	6C7
	=GND_DCIN_CHGND - @m42a_lib.M42A	6C8 65C8
	=GND_CHASSIS_TMDS_UPPER - @m42a_lib.M42A	6C8 69A4 69C3
=P1V2S0_EN	=P1V2S0_EN - @m42a_lib.M42A	63B5
	PM_SLP_S3_LS12V6_L - @m42a_lib.M42A	63B6
	=P3V3S0_EN - @m42a_lib.M42A	63B5
	=P5VS0_EN - @m42a_lib.M42A	63C5
	PM_SLP_S3_LS12V6_L - @m42a_lib.M42A	63B6
=P1V8S0_EN_L	=P1V8S0_EN_L - @m42a_lib.M42A	63A5
	PM_SLP_S3_LS5V - @m42a_lib.M42A	63A6
=P3V3S3_EN_L	=P3V3S3_EN_L - @m42a_lib.M42A	63C5
	PM_SLP_S4_LS5V - @m42a_lib.M42A	42B8 63D6
	=P5VS3_EN_L - @m42a_lib.M42A	63D5
	PM_SLP_S4_LS5V - @m42a_lib.M42A	42B8 63D6
=PP1V05_S0_FSB_NB	=PP1V05_S0_FSB_NB - @m42a_lib.M42A	12A7 12B7 12C2 19D7 33B8 33C7 33C8 64D6
	=PP1V05_S0_NB - @m42a_lib.M42A	19D1 19D7 64C6
	=PP1V05_S0_CPU_NB - @m42a_lib.M42A	62A6 64D8
	=PP1V05_S0_NB_VTT - @m42a_lib.M42A	17D3 19B5 19D7 64C6
	=PP1V05_S0_CPU - @m42a_lib.M42A	7B5 7B6 7D5 7D5 8C7 9C8 11B3 11C5 64D6
	=PPVCORE_S0_NB - @m42a_lib.M42A	16C8 16D3 19C8 19D7 64D6
	PP1V05_S0_CPU_NB - @m42a_lib.M42A	64D7
	=PPVCORE_S0_NB - @m42a_lib.M42A	16C8 16D3 19C8 19D7 64D6
	=PP1V05_S0_NB_VTT - @m42a_lib.M42A	17D3 19B5 19D7 64C6
	=PP1V05_S0_NB - @m42a_lib.M42A	19D1 19D7 64C6
	=PP1V05_S0_CPU_NB - @m42a_lib.M42A	62A6 64D8
	=PP1V05_S0_CPU - @m42a_lib.M42A	7B5 7B6 7D5 7D5 8C7 9C8 11B3 11C5 64D6
=PP1V05_S0_REG	=PP1V05_S0_REG - @m42a_lib.M42A	5B2 62B1 64D8
	=PP1V05_S0_CPU_NB_SENSE - @m42a_lib.M42A	62A8 64D6
	=PP1V05_S0_SB_CPU_IO - @m42a_lib.M42A	21C1 21C1 24C3 25C4 64D6
	=PPVCORE_S0_SB - @m42a_lib.M42A	24D3 25D3 64D6
	PP1V05_S0 - @m42a_lib.M42A	5B2 64D7
	=PPVCORE_S0_SB - @m42a_lib.M42A	24D3 25D3 64D6
	=PP1V05_S0_SB_CPU_IO - @m42a_lib.M42A	21C1 21C1 24C3 25C4 64D6
	=PP1V05_S0_CPU_NB_SENSE - @m42a_lib.M42A	62A8 64D6
=PP1V5_S0_NB	=PP1V5_S0_NB - @m42a_lib.M42A	19C1 19D7 64C6
	=PP1V5_S0_NB_PCIE - @m42a_lib.M42A	13D2 19D7 64C6
	=PP1V5_S0_AIRPORT - @m42a_lib.M42A	43D3 64C6
	=PP1V5_S0_SB_VCCSATAPLL - @m42a_lib.M42A	24B5 25D6 64C6
	=PP1V5_S0_SB_VCC1_5_A_ATX - @m42a_lib.M42A	24A5 25C6 64C6
	=PP1V5_S0_SB_VCCUSBPLL - @m42a_lib.M42A	24A5 25B6 64C6
	=PP1V5_S0_SB_VCC1_5_A_USB_CORE - @m42a_lib.M42A	24A3 25B2 64C6
	=PP1V5_S0_SB_VCC1_5_A - @m42a_lib.M42A	24A3 25C2 64C6
	=PP1V5_S0_SB - @m42a_lib.M42A	25A8 25C8 64C6
	=PP1V5_S0_NB_VCCAUX - @m42a_lib.M42A	16D1 17B6 19B6 19D7 64C6
	=PP1V5_S0_NB_VCCD_HMPLL - @m42a_lib.M42A	17C6 19D7 64C6
	=PP1V5_S0_NB_VCCD_LVDS - @m42a_lib.M42A	17C6 19B8 19D7 64C6
	=PP1V5_S0_NB_PLL - @m42a_lib.M42A	19C6 19D7 64C6
	=PP1V5_S0_NB_TVDAC - @m42a_lib.M42A	19A8 19D7 64C6
	=PP1V5_S0_NB_3G - @m42a_lib.M42A	19B5 64C6
	=PP1V5_S0_NB_3GPLL - @m42a_lib.M42A	19A5 64C6
	=PP1V5_S0_SB_VCC1_5_A_ARX - @m42a_lib.M42A	24B5 25D6 64C6
	=PP1V5_S0_CPU - @m42a_lib.M42A	8B7 9D8 64C6
	=PP1V5_S0_REG - @m42a_lib.M42A	62B8 64C8
	PP1V5_S0 - @m42a_lib.M42A	5B2 64C7
	=PP1V5_S0_SB_VCCUSBPLL - @m42a_lib.M42A	24A5 25B6 64C6
	=PP1V5_S0_SB_VCCSATAPLL - @m42a_lib.M42A	24B5 25D6 64C6
	=PP1V5_S0_SB_VCC1_5_A_USB_CORE - @m42a_lib.M42A	24A3 25B2 64C6
	=PP1V5_S0_SB_VCC1_5_A_ATX - @m42a_lib.M42A	24A5 25C6 64C6
	=PP1V5_S0_SB_VCC1_5_A_ARX - @m42a_lib.M42A	24B5 25D6 64C6
	=PP1V5_S0_SB_VCC1_5_A - @m42a_lib.M42A	24A3 25C2 64C6
	=PP1V5_S0_SB - @m42a_lib.M42A	25A8 25C8 64C6
	=PP1V5_S0_REG - @m42a_lib.M42A	62B8 64C8
	=PP1V5_S0_NB_VCCD_LVDS - @m42a_lib.M42A	17C6 19B8 19D7 64C6
	=PP1V5_S0_NB_VCCD_HMPLL - @m42a_lib.M42A	17C6 19D7 64C6
	=PP1V5_S0_NB_VCCAUX - @m42a_lib.M42A	16D1 17B6 19B6 19D7 64C6
	=PP1V5_S0_NB_TVDAC - @m42a_lib.M42A	19A8 19D7 64C6
	=PP1V5_S0_NB_PLL - @m42a_lib.M42A	19C6 19D7 64C6
	=PP1V5_S0_NB_PCIE - @m42a_lib.M42A	13D2 19D7 64C6
	=PP1V5_S0_NB_3GPLL - @m42a_lib.M42A	19A5 64C6
	=PP1V5_S0_NB_3G - @m42a_lib.M42A	19B5 64C6
	=PP1V5_S0_CPU - @m42a_lib.M42A	8B7 9D8 64C6
	=PP1V5_S0_AIRPORT - @m42a_lib.M42A	43D3 64C6
=PP1V8_S3_MEM_NB	=PP1V8_S3_MEM_NB - @m42a_lib.M42A	14C2 16B6 19D7 28D2 29D2 61C2 64C6
	PP1V8_S3_MEM_NB - @m42a_lib.M42A	64C4
=PP2V5_S0_NB_CRTDAC	=PP2V5_S0_NB_CRTDAC - @m42a_lib.M42A	19D4 19D7 64B6
	=PP2V5_S0_NB_VCCA_3GBG - @m42a_lib.M42A	17D6 19B7 19D7 64B6
	=PP2V5_S0_NB_VCC_TXLVDS - @m42a_lib.M42A	17D6 19B8 19D7 64B6
	=PP2V5_S0_NB_DISP_PLL - @m42a_lib.M42A	19D6 64B6
	=PP2V5_S0_NB_VCCA_LVDS - @m42a_lib.M42A	17C6 19C7 19D1 64B6
	=PP2V5_S0_TMDS - @m42a_lib.M42A	64B6 68B7
	=PP2V5_S0_NB_VCCSYNC - @m42a_lib.M42A	17D6 19B6 19D7 64B6
	=PP2V5_S0_REG - @m42a_lib.M42A	60C2 63B3 64B8
	PP2V5_S0 - @m42a_lib.M42A	5B2 64B7
	=PP2V5_S0_TMDS - @m42a_lib.M42A	64B6 68B7
	=PP2V5_S0_REG - @m42a_lib.M42A	60C2 63B3 64B8
	=PP2V5_S0_NB_VCC_TXLVDS - @m42a_lib.M42A	17D6 19B8 19D7 64B6
	=PP2V5_S0_NB_VCCSYNC - @m42a_lib.M42A	17D6 19B6 19D7 64B6
	=PP2V5_S0_NB_VCCA_LVDS - @m42a_lib.M42A	17C6 19C7 19D1 64B6
	=PP2V5_S0_NB_VCCA_3GBG - @m42a_lib.M42A	17D6 19B7 19D7 64B6
	=PP2V5_S0_NB_DISP_PLL - @m42a_lib.M42A	19D6 64B6
=PP3V3_S0_FAN_RT	=PP3V3_S0_FAN_RT - @m42a_lib.M42A	5D2 51C4 64A6
	=PP3V3_S0_ENET - @m42a_lib.M42A	36C8 64A6
	=PP3V3_S0_FW - @m42a_lib.M42A	39C6 64A6
	=PP3V3_S0_2V5S0 - @m42a_lib.M42A	60C4 64A6
	=PP3V3_S0_1V51V05S0 - @m42a_lib.M42A	62B1 64A6
	=PP3V3_S0_SMBUS_SMC_BSB - @m42a_lib.M42A	27B1 64A6
	=PP3V3_S0_RSTBUF - @m42a_lib.M42A	26B4 64A6
	=PP3V3_S0_SMBUS_SB - @m42a_lib.M42A	27D8 64A6
	=PP3V3_S0_SMBUS_SMC_0 - @m42a_lib.M42A	27D5 64A6
	=PP3V3_S0_SMBUS_SMC_MLB - @m42a_lib.M42A	27C5 64A6
	=PP3V3_S0_ALLSYSPG - @m42a_lib.M42A	63B1 64A6
	=PP3V3_S0_LCD - @m42a_lib.M42A	64A6 67B5 67B5 67B7 67C6
	=PP3V3_S0_PBATTISENS - @m42a_lib.M42A	64A6 66B3
	=PP3V3_S0_PDCISENS - @m42a_lib.M42A	62A5 64A6 66C4
	=PP3V3_S0_CPUPOWER - @m42a_lib.M42A	48C2 64A6
	=PP3V3_S0_SB - @m42a_lib.M42A	22B5 25D8 34C8 64B6
	=PP3V3_S0_SB_GPIO - @m42a_lib.M42A	21C3 21D3 23B2 23D5 64B6
	=PP3V3_S0_SB_VCC3_3 - @m42a_lib.M42A	24B5 24B5 25B8 25C6 64B6
	=PP3V3_S0_SB_VCC3_3_PCI - @m42a_lib.M42A	24B3 25A4 64B6
	=PP3V3_S0_SB_VCC3_3_IDE - @m42a_lib.M42A	24C3 25B4 64B6
	=PP3V3_S0_SB_PCI - @m42a_lib.M42A	26D1 64B6
	=PP3V3_S0_SB_PM - @m42a_lib.M42A	26B6 26B8 64B6
	=PP3V3_S0_PATA - @m42a_lib.M42A	34C2 64A6
	=PP3V3_S0_SMC_LS - @m42a_lib.M42A	46D3 64A6
	=PP3V3_S0_NB - @m42a_lib.M42A	14C7 14D6 19C7 20A4 20B4 20B8 64A6
	=PP3V3_S0_SB_VCCLAN3_3 - @m42a_lib.M42A	24D3 25D3 64A6
	=PP3V3_S0_SB_3V3_1V5_VCCHDA - @m42a_lib.M42A	24C3 25C4 64A6
	=PP3V3_S0_AIRPORT - @m42a_lib.M42A	43C3 64A6
	=PP3V3_S0_TPM - @m42a_lib.M42A	53D4 64A6
	=PP3V3_S0_AUDIO - @m42a_lib.M42A	54A6 54D7 56D8 57B5 64A6
	=PP3V3_S0_TMDS - @m42a_lib.M42A	64A6 68B1 68B2 68C8 68C8 68D8 68D8 69B7 69D1 69D5
	=PP3V3_S0_THRM_SNR - @m42a_lib.M42A	10C4 49B3 49D3 64A6
	=PP3V3_S0_SMC_LS - @m42a_lib.M42A	46D3 64A6
	=PP3V3_S0_SMBUS_SMC_MLB - @m42a_lib.M42A	27C5 64A6
	=PP3V3_S0_SMBUS_SMC_BSB - @m42a_lib.M42A	27B1 64A6
	=PP3V3_S0_SMBUS_SMC_0 - @m42a_lib.M42A	27D5 64A6
	=PP3V3_S0_SMBUS_SB - @m42a_lib.M42A	27D8 64A6
	=PP3V3_S0_SB_VCCLAN3_3 - @m42a_lib.M42A	24D3 25D3 64A6
	=PP3V3_S0_SB_VCC3_3_PCI - @m42a_lib.M42A	24B3 25A4 64B6
	=PP3V3_S0_SB_VCC3_3_IDE - @m42a_lib.M42A	24C3 25B4 64B6
	=PP3V3_S0_SB_VCC3_3 - @m42a_lib.M42A	24B5 24B5 25B8 25C6 64B6
	=PP3V3_S0_SB_PM - @m42a_lib.M42A	26B6 26B8 64B6
	=PP3V3_S0_SB_PCI - @m42a_lib.M42A	26D1 64B6
	=PP3V3_S0_SB_GPIO - @m42a_lib.M42A	21C3 21D3 23B2 23D5 64B6
	=PP3V3_S0_SB_3V3_1V5_VCCHDA - @m42a_lib.M42A	24C3 25C4 64A6
	=PP3V3_S0_SB - @m42a_lib.M42A	22B5 25D8 34C8 64B6
	=PP3V3_S0_RSTBUF - @m42a_lib.M42A	26B4 64A6
	=PP3V3_S0_PDCISENS - @m42a_lib.M42A	62A5 64A6 66C4
	=PP3V3_S0_PBATTISENS - @m42a_lib.M42A	64A6 66B3
	=PP3V3_S0_PATA - @m42a_lib.M42A	34C2 64A6
	=PP3V3_S0_NB_VCC_HV - @m42a_lib.M42A	17C6 19B7 19C7 64B6
	=PP3V3_S0_NB - @m42a_lib.M42A	14C7 14D6 19C7 20A4 20B4 20B8 64A6
	=PP3V3_S0_LCD - @m42a_lib.M42A	64A6 67B5 67B5 67B7 67C6
	=PP3V3_S0_IMVP6 - @m42a_lib.M42A	58D8 64A6
	=PP3V3_S0_FW - @m42a_lib.M42A	39C6 64A6
	=PP3V3_S0_FET - @m42a_lib.M42A	63C3 64B8
	=PP3V3_S0_ENET - @m42a_lib.M42A	36C8 64A6
	=PP3V3_S0_CPUPOWER - @m42a_lib.M42A	48C2 64A6
	=PP3V3_S0_CK410 - @m42a_lib.M42A	32C7 32D3 32D8 64A6
	=PP3V3_S0_AUDIO - @m42a_lib.M42A	54A6 54D7 56D8 57B5 64A6
	=PP3V3_S0_ALLSYSPG - @m42a_lib.M42A	63B1 64A6
	=PP3V3_S0_AIRPORT - @m42a_lib.M42A	43C3 64A6
	=PP3V3_S0_2V5S0 - @m42a_lib.M42A	60C4 64A6
	=PP3V3_S0_1V51V05S0 - @m42a_lib.M42A	62B1 64A6
=PP3V42_G3H_LPCPLUS	=PP3V42_G3H_LPCPLUS - @m42a_lib.M42A	5D2 47C6 64D1
	=PP3V42_G3H_SMCVREF - @m42a_lib.M42A	46C8 64D1
	=PP3V42_G3H_SMC - @m42a_lib.M42A	45D2 45D3 45D3 46D1 46D5 46D8 48C8 64D1
	=PP3V42_G3H_SB_RTC - @m42a_lib.M42A	26D6 64D1
	=PP3V42_G3H_ACIN - @m42a_lib.M42A	64D1 65C4 65C8 66A5
	=PP3V42_G3H_SMC_CLK - @m42a_lib.M42A	46A8 64D1
	=PP3V42_G3H_LIDSWITCH - @m42a_lib.M42A	64D1 65A8
	=PP3V42_G3H_SMBUS_SMC_BSA - @m42a_lib.M42A	27C3 64D1
	=PP3V42_G3H_PWRCTL - @m42a_lib.M42A	63B8 63C8 64D1
	PP3V42_G3H - @m42a_lib.M42A	5A2 64D1
	=PP3V42_G3H_SMC_CLK - @m42a_lib.M42A	46A8 64D1
	=PP3V42_G3H_SMCVREF - @m42a_lib.M42A	46C8 64D1
	=PP3V42_G3H_SMC - @m42a_lib.M42A	45D2 45D3 45D3 46D1 46D5 46D8 48C8 64D1
	=PP3V42_G3H_SMBUS_SMC_BSA - @m42a_lib.M42A	27C3 64D1
	=PP3V42_G3H_SB_RTC - @m42a_lib.M42A	26D6 64D1
	=PP3V42_G3H_REG - @m42a_lib.M42A	63D1 64D3
	=PP3V42_G3H_PWRCTL - @m42a_lib.M42A	63B8 63C8 64D1
	=PP3V42_G3H_LIDSWITCH - @m42a_lib.M42A	64D1 65A8
	=PP3V42_G3H_ACIN - @m42a_lib.M42A	64D1 65C4 65C8 66A5
=PP5V_S0_FAN_RT	=PP5V_S0_FAN_RT - @m42a_lib.M42A	5D2 51C4 64D3
	=PP5V_S0_ISENSECAL - @m42a_lib.M42A	48A8 64D3
	=PP5V_S0_LCD - @m42a_lib.M42A	64D3 67D7
	=PP5V_S0_TMDS - @m42a_lib.M42A	64D3 68B7 69C6
	=PP5V_S0_IMVP6 - @m42a_lib.M42A	58D8 64D3
	=PP5V_S0_1V51V05S0_VCC - @m42a_lib.M42A	62A8 64D3
	=PP5V_S0_NB_TVDAC - @m42a_lib.M42A	19C4 19C7 64D3
	=PP5V_S0_LPCPLUS - @m42a_lib.M42A	5D2 47C6 64D3
	=PP5V_S0_AUDIO_PWR - @m42a_lib.M42A	55B8 55B8 55D8 64D3
	=PP5V_S0_AUDIO - @m42a_lib.M42A	54A6 55C8 64D3
	=PP5V_S0_SB - @m42a_lib.M42A	25D8 64D3
	PP5V_S0 - @m42a_lib.M42A	5A2 64D4
	=PP5V_S0_TMDS - @m42a_lib.M42A	64D3 68B7 69C6
	=PP5V_S0_SB - @m42a_lib.M42A	25D8 64D3
	=PP5V_S0_SATA - @m42a_lib.M42A	35C6 64D3
	=PP5V_S0_NB_TVDAC - @m42a_lib.M42A	19C4 19C7 64D3
	=PP5V_S0_MEMVTT - @m42a_lib.M42A	31C6 64D3
	=PP5V_S0_LPCPLUS - @m42a_lib.M42A	5D2 47C6 64D3
	=PP5V_S0_LCD - @m42a_lib.M42A	64D3 67D7
	=PP5V_S0_ISENSECAL - @m42a_lib.M42A	48A8 64D3
	=PP5V_S0_IMVP6 - @m42a_lib.M42A	58D8 64D3
	=PP5V_S0_FET - @m42a_lib.M42A	63C3 64D6
	=PP5V_S0_AUDIO_PWR - @m42a_lib.M42A	55B8 55B8 55D8 64D3
	=PP5V_S0_AUDIO - @m42a_lib.M42A	54A6 55C8 64D3
	=PP5V_S0_1V51V05S0_VCC - @m42a_lib.M42A	62A8 64D3
=PP5V_S0_IDE_PATA	=PP5V_S0_IDE_PATA - @m42a_lib.M42A	34C5
	PP5V_S0_IDE_PATA - @m42a_lib.M42A	34D3
=PPDCIN_G3H	=PPDCIN_G3H - @m42a_lib.M42A	64B3 65D3
	=PPVBATT_G3H - @m42a_lib.M42A	64B3 66B2
	=PPVIN_G3H_P3V42G3H - @m42a_lib.M42A	63D3 64B1
	PPDCIN_G3H - @m42a_lib.M42A	64B1
	=PPVIN_G3H_P3V42G3H - @m42a_lib.M42A	63D3 64B1
	=PPVBATT_G3H - @m42a_lib.M42A	64B3 66B2
=SMBUS_ATS_SCL	=SMBUS_ATS_SCL - @m42a_lib.M42A	27D1 67A2
	SMBUS_SMC_RMT_SCL - @m42a_lib.M42A	27D2
	SMB_RMT_CLK - @m42a_lib.M42A	27D3 45B5
	SMBUS_SMC_RMT_SCL - @m42a_lib.M42A	27D2
=SMBUS_ATS_SDA	=SMBUS_ATS_SDA - @m42a_lib.M42A	27C1 67A2
	SMBUS_SMC_RMT_SDA - @m42a_lib.M42A	27D2
	SMB_RMT_DATA - @m42a_lib.M42A	27D3 45B5
	SMBUS_SMC_RMT_SDA - @m42a_lib.M42A	27D2
=SMB_AIRPORT_CLK	=SMB_AIRPORT_CLK - @m42a_lib.M42A	27C6 43B4
	=SMB_GEYSER_CLK - @m42a_lib.M42A	27B6 40C4
	SMBUS_SB_SCL - @m42a_lib.M42A	27D7
	=I2C_SODIMMB_SCL - @m42a_lib.M42A	27C6 29A6
	SMB_CLK - @m42a_lib.M42A	23D5 27D8
	=I2C_SODIMMA_SCL - @m42a_lib.M42A	27D6 28A6
	SMB_CK410_CLK - @m42a_lib.M42A	27D6 32B6
	SMB_CLK - @m42a_lib.M42A	23D5 27D8
	SMB_CK410_CLK - @m42a_lib.M42A	27D6 32B6
	SMBUS_SB_SCL - @m42a_lib.M42A	27D7
	=SMB_GEYSER_CLK - @m42a_lib.M42A	27B6 40C4
	=I2C_SODIMMB_SCL - @m42a_lib.M42A	27C6 29A6
	=I2C_SODIMMA_SCL - @m42a_lib.M42A	27D6 28A6
=SMB_AIRPORT_DATA	=SMB_AIRPORT_DATA - @m42a_lib.M42A	27C6 43B4
	=SMB_GEYSER_DATA - @m42a_lib.M42A	27B6 40C4
	SMBUS_SB_SDA - @m42a_lib.M42A	27D7
	=I2C_SODIMMB_SDA - @m42a_lib.M42A	27C6 29A6
	SMB_DATA - @m42a_lib.M42A	23D5 27D8
	=I2C_SODIMMA_SDA - @m42a_lib.M42A	27C6 28A6
	SMB_CK410_DATA - @m42a_lib.M42A	27D6 32B6
	SMB_DATA - @m42a_lib.M42A	23D5 27D8
	SMB_CK410_DATA - @m42a_lib.M42A	27D6 32B6
	SMBUS_SB_SDA - @m42a_lib.M42A	27D7
	=SMB_GEYSER_DATA - @m42a_lib.M42A	27B6 40C4
	=I2C_SODIMMB_SDA - @m42a_lib.M42A	27C6 29A6
	=I2C_SODIMMA_SDA - @m42a_lib.M42A	27C6 28A6
=USB2_AIRPORT_N	=USB2_AIRPORT_N - @m42a_lib.M42A	6B2 43B4
	USB_H_N - @m42a_lib.M42A	6B1 22C2
	USB2_AIR

AUD_4V5_SHDN_L	AUD_4V5_SHDN_L - @m42a_lib.M42A	54A5
AUD_ALC_COUT	AUD_ALC_COUT - @m42a_lib.M42A	54B5
AUD_ANALOG_FILT_1	AUD_ANALOG_FILT_1 - @m42a_lib.M42A	54C4
AUD_ANALOG_FILT_2	AUD_ANALOG_FILT_2 - @m42a_lib.M42A	54C4
AUD_BI_PORT_A_L	AUD_BI_PORT_A_L - @m42a_lib.M42A	54C1 57C3
AUD_BI_PORT_A_R	AUD_BI_PORT_A_R - @m42a_lib.M42A	54C1 57B3
AUD_BI_PORT_B_L	AUD_BI_PORT_B_L - @m42a_lib.M42A AUD_BI_PORT_B_R - @m42a_lib.M42A	54C1 57A6 54C1 57A6
AUD_BI_PORT_C_L	AUD_BI_PORT_C_L - @m42a_lib.M42A	54C7 55B8
AUD_BI_PORT_C_R	AUD_BI_PORT_C_R - @m42a_lib.M42A	54C7 55C8
AUD_BI_PORT_D_L	AUD_BI_PORT_D_L - @m42a_lib.M42A	54C7 57A5
AUD_BI_PORT_D_R	AUD_BI_PORT_D_R - @m42a_lib.M42A	54C7 55A8
AUD_BI_PORT_E_L	AUD_BI_PORT_E_L - @m42a_lib.M42A	54C1 57A5
AUD_BI_PORT_E_R	AUD_BI_PORT_E_R - @m42a_lib.M42A	54C1 57A5
AUD_BI_PORT_F_L	AUD_BI_PORT_F_L - @m42a_lib.M42A	54C1 57B3
AUD_BI_PORT_F_R	AUD_BI_PORT_F_R - @m42a_lib.M42A	54C1 57A3
AUD_BYPASS	AUD_BYPASS - @m42a_lib.M42A	54C4
AUD_CONNJ1_RING	AUD_CONNJ1_RING - @m42a_lib.M42A	56C7
AUD_CONNJ1_RING_F	AUD_CONNJ1_RING_F - @m42a_lib.M42A	56C6
AUD_CONNJ1_SLEEVE	AUD_CONNJ1_SLEEVE - @m42a_lib.M42A	56D7
AUD_CONNJ1_SLEEVEDET	AUD_CONNJ1_SLEEVEDET - @m42a_lib.M42A	56C7
AUD_CONNJ1_SLEEVEDET_F	AUD_CONNJ1_SLEEVEDET_F - @m42a_lib.M42A	56C6
AUD_CONNJ1_SLEEVE_F	AUD_CONNJ1_SLEEVE_F - @m42a_lib.M42A	56D5
AUD_CONNJ1_TIP	AUD_CONNJ1_TIP - @m42a_lib.M42A	56C7
AUD_CONNJ1_TIPDET	AUD_CONNJ1_TIPDET - @m42a_lib.M42A	56D7
AUD_CONNJ1_TIPDET_F	AUD_CONNJ1_TIPDET_F - @m42a_lib.M42A	56D6
AUD_CONNJ1_TIP_F	AUD_CONNJ1_TIP_F - @m42a_lib.M42A	56C6
AUD_CONNJ2_RING	AUD_CONNJ2_RING - @m42a_lib.M42A	56B7
AUD_CONNJ2_RING_F	AUD_CONNJ2_RING_F - @m42a_lib.M42A	56B6
AUD_CONNJ2_SLEEVE	AUD_CONNJ2_SLEEVE - @m42a_lib.M42A	56B7
AUD_CONNJ2_SLEEVEDET	AUD_CONNJ2_SLEEVEDET - @m42a_lib.M42A	56A7
AUD_CONNJ2_SLEEVEDET_F	AUD_CONNJ2_SLEEVEDET_F - @m42a_lib.M42A	56A6
AUD_CONNJ2_SLEEVE_F	AUD_CONNJ2_SLEEVE_F - @m42a_lib.M42A	56B6
AUD_CONNJ2_TIP	AUD_CONNJ2_TIP - @m42a_lib.M42A	56B7
AUD_CONNJ2_TIPDET	AUD_CONNJ2_TIPDET - @m42a_lib.M42A	56B7
AUD_CONNJ2_TIPDET_F	AUD_CONNJ2_TIPDET_F - @m42a_lib.M42A	56B6
AUD_CONNJ2_TIP_F	AUD_CONNJ2_TIP_F - @m42a_lib.M42A	56B6
AUD_GPIO_0	AUD_GPIO_0 - @m42a_lib.M42A	54B8 55A8
AUD_GPIO_0_R	AUD_GPIO_0_R - @m42a_lib.M42A	54B7 54C7
AUD_GPIO_1	AUD_GPIO_1 - @m42a_lib.M42A	54B8 57C3
AUD_GPIO_1_R	AUD_GPIO_1_R - @m42a_lib.M42A	54A7 54C7
AUD_GPIO_2	AUD_GPIO_2 - @m42a_lib.M42A	54C7
AUD_INJACK_INSERT_L	AUD_INJACK_INSERT_L - @m42a_lib.M42A	57C7
AUD_J1_COM	AUD_J1_COM - @m42a_lib.M42A	56C4
AUD_J1_DET_RC	AUD_J1_DET_RC - @m42a_lib.M42A	57D7
AUD_J1_SLEEVEDET_INV	AUD_J1_SLEEVEDET_INV - @m42a_lib.M42A	57C7
AUD_J1_SLEEVEDET_R	AUD_J1_SLEEVEDET_R - @m42a_lib.M42A	56C3 57C6 57C8
AUD_J1_TIPDET_R	AUD_J1_TIPDET_R - @m42a_lib.M42A	56C3 57D8
AUD_J2_COM	AUD_J2_COM - @m42a_lib.M42A	56B4
AUD_J2_DET_RC	AUD_J2_DET_RC - @m42a_lib.M42A	57B7
AUD_J2_OPT_OUT	AUD_J2_OPT_OUT - @m42a_lib.M42A	56B7
AUD_J2_SLEEVEDET_R	AUD_J2_SLEEVEDET_R - @m42a_lib.M42A	56A4 57B8
AUD_J2_TIPDET_R	AUD_J2_TIPDET_R - @m42a_lib.M42A	56A4 57B8
AUD_JDREF	AUD_JDREF - @m42a_lib.M42A	54C4
AUD_OUTJACK_INSERT_L	AUD_OUTJACK_INSERT_L - @m42a_lib.M42A	57D7
AUD_PORTA_DET_L	AUD_PORTA_DET_L - @m42a_lib.M42A	57D5
AUD_PORTA_L	AUD_PORTA_L - @m42a_lib.M42A	56C3 57D1
AUD_PORTA_L_R	AUD_PORTA_L_R - @m42a_lib.M42A	57B1 57D3
AUD_PORTA_R	AUD_PORTA_R - @m42a_lib.M42A	56C3 57C1
AUD_PORTA_R_R	AUD_PORTA_R_R - @m42a_lib.M42A	57B1 57C3
AUD_PORTE_DET_L	AUD_PORTE_DET_L - @m42a_lib.M42A	57D5
AUD_PORTF_L	AUD_PORTF_L - @m42a_lib.M42A	56B4 57B1
AUD_PORTF_L_R	AUD_PORTF_L_R - @m42a_lib.M42A	57B2
AUD_PORTF_R	AUD_PORTF_R - @m42a_lib.M42A	56B4 57A1
AUD_PORTF_R_R	AUD_PORTF_R_R - @m42a_lib.M42A	57A2
AUD_PORTG_DET_L	AUD_PORTG_DET_L - @m42a_lib.M42A	57C5
AUD_SENSE_A	AUD_SENSE_A - @m42a_lib.M42A	54C1 57C5 57D8
AUD_SENSE_B	AUD_SENSE_B - @m42a_lib.M42A	54C1 57C4 57C8 57D8
AUD_SPDIF_IN	AUD_SPDIF_IN - @m42a_lib.M42A	54C1 56B3
AUD_SPDIF_OUT	AUD_SPDIF_OUT - @m42a_lib.M42A	54D1 56D3
AUD_SPDIF_OUT_R	AUD_SPDIF_OUT_R - @m42a_lib.M42A	54D4
AUD_SPKRAMP_INL	AUD_SPKRAMP_INL - @m42a_lib.M42A	55B6
AUD_SPKRAMP_INL_L	AUD_SPKRAMP_INL_L - @m42a_lib.M42A	55B7
AUD_SPKRAMP_INR	AUD_SPKRAMP_INR - @m42a_lib.M42A	55C6
AUD_SPKRAMP_INR_L	AUD_SPKRAMP_INR_L - @m42a_lib.M42A	55C7
AUD_SPKRAMP_INSUB	AUD_SPKRAMP_INSUB - @m42a_lib.M42A	55A6
AUD_SPKRAMP_INSUB_L	AUD_SPKRAMP_INSUB_L - @m42a_lib.M42A	55A7
AUD_SPKRAMP_SHUTDOWN_L	AUD_SPKRAMP_SHUTDOWN_L - @m42a_lib.M42A	55A6 55B8 55C8
AUD_VREF_FILT	AUD_VREF_FILT - @m42a_lib.M42A	54C4
AUD_VREF_PORT_B	AUD_VREF_PORT_B - @m42a_lib.M42A	54C1 57A6
BAL_IN_COM	BAL_IN_COM - @m42a_lib.M42A	54C7 57A3
BAL_IN_L	BAL_IN_L - @m42a_lib.M42A	54C7 57A3
BAL_IN_R	BAL_IN_R - @m42a_lib.M42A	54C7 57A3
BATT_ENABLE_L	BATT_ENABLE_L - @m42a_lib.M42A	66A4
BATT_FET_DRAIN	BATT_FET_DRAIN - @m42a_lib.M42A	66A5
BATT_FET_GATE	BATT_FET_GATE - @m42a_lib.M42A	66A4
BATT_IN	BATT_IN - @m42a_lib.M42A	5D1
BATT_ISENSE	BATT_ISENSE - @m42a_lib.M42A	66B2
BATT_NEG	BATT_NEG - @m42a_lib.M42A	5D1 65A6
BATT_POS	BATT_POS - @m42a_lib.M42A	5D1 65A6
BATT_POS_F	BATT_POS_F - @m42a_lib.M42A	65A2 66B2
BATT_RC	BATT_RC - @m42a_lib.M42A	66A5
BEEP	BEEP - @m42a_lib.M42A	54C6
BIOS_REC	BIOS_REC - @m42a_lib.M42A	23A6 23C5
BKLIGHT_CTL	BKLIGHT_CTL - @m42a_lib.M42A	67C4
BOOT_LPC_SPI_L	BOOT_LPC_SPI_L - @m42a_lib.M42A	5C2 22B3 45C8 47C6
BYPASS_R_DRV	BYPASS_R_DRV - @m42a_lib.M42A	66A3
BYPASS_R_GATE	BYPASS_R_GATE - @m42a_lib.M42A	66A3
CHASSIS_AUDIO_JACK_ISOL	CHASSIS_AUDIO_JACK_ISOL - @m42a_lib.M42A	56A3 56A8 56B1 56B6 56B6 56C1 56C1 56C8
CHGR_ACLIM	CHGR_ACLIM - @m42a_lib.M42A	66C6
CHGR_ACPRN	CHGR_ACPRN - @m42a_lib.M42A	66B6
CHGR_ACSET	CHGR_ACSET - @m42a_lib.M42A	66C6
CHGR_ACSET_RC	CHGR_ACSET_RC - @m42a_lib.M42A	66C8
CHGR_BGATE	CHGR_BGATE - @m42a_lib.M42A	66C5
CHGR_BOOT	CHGR_BOOT - @m42a_lib.M42A	66C5
CHGR_BOOT_RC	CHGR_BOOT_RC - @m42a_lib.M42A	66C4
CHGR_CHLIM	CHGR_CHLIM - @m42a_lib.M42A	66B6
CHGR_CSIN	CHGR_CSIN - @m42a_lib.M42A	66C5
CHGR_CSON	CHGR_CSON - @m42a_lib.M42A	66C6
CHGR_CSOP	CHGR_CSOP - @m42a_lib.M42A	66C6

CHGR_DCIN	CHGR_DCIN - @m42a_lib.M42A	66C5
CHGR_DCPRN	CHGR_DCPRN - @m42a_lib.M42A	66B5
CHGR_DCSET	CHGR_DCSET - @m42a_lib.M42A	66B5
CHGR_EN	CHGR_EN - @m42a_lib.M42A	66B5
CHGR_EN_L	CHGR_EN_L - @m42a_lib.M42A	66A6
CHGR_ICM	CHGR_ICM - @m42a_lib.M42A	66C6
CHGR_ICM_R	CHGR_ICM_R - @m42a_lib.M42A	66C6
CHGR_ICOMP	CHGR_ICOMP - @m42a_lib.M42A	66C6
CHGR_ICOMP_RC	CHGR_ICOMP_RC - @m42a_lib.M42A	66C7
CHGR_LGATE	CHGR_LGATE - @m42a_lib.M42A	66C5
CHGR_PHASE	CHGR_PHASE - @m42a_lib.M42A	66C5
CHGR_PHASE_RC	CHGR_PHASE_RC - @m42a_lib.M42A	66B4
CHGR_SGATE	CHGR_SGATE - @m42a_lib.M42A	66C5
CHGR_UGATE	CHGR_UGATE - @m42a_lib.M42A	66C5
CHGR_VADJ	CHGR_VADJ - @m42a_lib.M42A	66B6 66C6
CHGR_VCOMP	CHGR_VCOMP - @m42a_lib.M42A	66C6
CHGR_VCOMP_CC	CHGR_VCOMP_CC - @m42a_lib.M42A	66C7
CHGR_VCOMP_RC	CHGR_VCOMP_RC - @m42a_lib.M42A	66C7
CHGR_VDD	CHGR_VDD - @m42a_lib.M42A	66B6 66D6
CHGR_VDDP	CHGR_VDDP - @m42a_lib.M42A	66C5
CHGR_VREF	CHGR_VREF - @m42a_lib.M42A	66B6
CK410_CLK14P3M_TIMER	CK410_CLK14P3M_TIMER - @m42a_lib.M42A	32A4 33B8
CK410_CPU0_N	CK410_CPU0_N - @m42a_lib.M42A	5C7 32C4 33D5
CK410_CPU0_P	CK410_CPU0_P - @m42a_lib.M42A	5C7 32C4 33D5
CK410_CPU1_N	CK410_CPU1_N - @m42a_lib.M42A	5C7 32C4 33D5
CK410_CPU1_P	CK410_CPU1_P - @m42a_lib.M42A	5C7 32C4 33D5
CK410_CPU2_ITP_SRC10_N	CK410_CPU2_ITP_SRC10_N - @m42a_lib.M42A	5C7 32C4 33D5
CK410_CPU2_ITP_SRC10_P	CK410_CPU2_ITP_SRC10_P - @m42a_lib.M42A	5C7 32C4 33D5
CK410_DOT96_27M_N	CK410_DOT96_27M_N - @m42a_lib.M42A	5C7 32A4 33B5
CK410_DOT96_27M_P	CK410_DOT96_27M_P - @m42a_lib.M42A	5C7 32A4 33B5
CK410_FSB_TEST_MODE	CK410_FSB_TEST_MODE - @m42a_lib.M42A	32C6 33B8
CK410_IREF	CK410_IREF - @m42a_lib.M42A	32B6
CK410_LVDS_N	CK410_LVDS_N - @m42a_lib.M42A	5C7 32B4 33A5
CK410_LVDS_P	CK410_LVDS_P - @m42a_lib.M42A	5C7 32B4 33A5
CK410_PCI1_CLK	CK410_PCI1_CLK - @m42a_lib.M42A	32B6 33D8
CK410_PCI2_CLK	CK410_PCI2_CLK - @m42a_lib.M42A	32B6 33D8
CK410_PCI3_CLK	CK410_PCI3_CLK - @m42a_lib.M42A	32B6 33D8
CK410_PCI4_CLK	CK410_PCI4_CLK - @m42a_lib.M42A	32B6
CK410_PCI4_CLK_SPN	CK410_PCI4_CLK_SPN - @m42a_lib.M42A	5C7
CK410_PCI5_FCTSEL1	CK410_PCI5_FCTSEL1 - @m42a_lib.M42A	32B6 33A8
CK410_PCIF0_CLK	CK410_PCIF0_CLK - @m42a_lib.M42A	32B7 33D8
CK410_PCIF1_CLK	CK410_PCIF1_CLK - @m42a_lib.M42A	5C7 32B6 33D8
CK410_PD_VTT_PWRGD_L	CK410_PD_VTT_PWRGD_L - @m42a_lib.M42A	26A8 32A4
CK410_REF1_FCTSEL0	VR_PWRGD_CK410_L - @m42a_lib.M42A	26A7 58C7
CK410_SRC1_N	CK410_SRC1_N - @m42a_lib.M42A	32A4 33A8
CK410_SRC1_P	CK410_SRC1_N_SPN - @m42a_lib.M42A	6B4 32B4
CK410_SRC2_N	CK410_SRC1_P - @m42a_lib.M42A	5C7 6B3
CK410_SRC2_P	CK410_SRC1_P_SPN - @m42a_lib.M42A	6B4 32B4
CK410_SRC3_N	CK410_SRC2_N - @m42a_lib.M42A	5C7 6B3
CK410_SRC3_P	CK410_SRC2_P - @m42a_lib.M42A	5C7 32B4 33C5
CK410_SRC4_N	CK410_SRC3_N - @m42a_lib.M42A	6B4 32B4
CK410_SRC4_P	CK410_SRC3_N_SPN - @m42a_lib.M42A	5C7 6B3
CK410_SRC5_N	CK410_SRC3_P - @m42a_lib.M42A	6B4 32B4
CK410_SRC5_P	CK410_SRC3_P_SPN - @m42a_lib.M42A	5C7 6B3
CK410_SRC6_N	CK410_SRC4_N - @m42a_lib.M42A	5C7 32B4 33B5
CK410_SRC6_P	CK410_SRC4_P - @m42a_lib.M42A	5C7 32B4 33B5
CK410_SRC7_N	CK410_SRC5_N - @m42a_lib.M42A	5C7 32B4 33C5
CK410_SRC7_P	CK410_SRC5_P - @m42a_lib.M42A	5C7 32B4 33C5
CK410_SRC8_N	CK410_SRC6_N - @m42a_lib.M42A	5C7 32B4 33C5
CK410_SRC8_P	CK410_SRC6_P - @m42a_lib.M42A	5C7 32B4 33D5
CK410_SRC_CLKREQ1_L	CK410_SRC_CLKREQ1_L - @m42a_lib.M42A	6B4 32B4
CK410_SRC_CLKREQ1_L_SPN	CK410_SRC_CLKREQ1_L_SPN - @m42a_lib.M42A	5B7 6B3
CK410_SRC_CLKREQ3_L	CK410_SRC_CLKREQ3_L - @m42a_lib.M42A	6B4 32B4
CK410_SRC_CLKREQ3_L_SPN	CK410_SRC_CLKREQ3_L_SPN - @m42a_lib.M42A	5B7 6B3
CK410_SRC_CLKREQ6_L	CK410_SRC_CLKREQ6_L - @m42a_lib.M42A	32B4 43C6
CK410_SRC_CLKREQ8_L	CK410_SRC_CLKREQ8_L - @m42a_lib.M42A	5B7 32A4 33A5
CK410_USB48_FSA	CK410_USB48_FSA - @m42a_lib.M42A	32A4 33C8
CK410_XTAL_IN	CK410_XTAL_IN - @m42a_lib.M42A	32C6
CK410_XTAL_OUT	CK410_XTAL_OUT - @m42a_lib.M42A	32C6
CLK_NB_OE_L	CLK_NB_OE_L - @m42a_lib.M42A	14B6 32B4
CONN_GEYSER_ONOFF_FL	CONN_GEYSER_ONOFF_FLTR_L - @m42a_lib.M42A	40C6
CONN_GEYSER_USB_N	CONN_GEYSER_USB_N - @m42a_lib.M42A	40C6
CONN_GEYSER_USB_P	CONN_GEYSER_USB_P - @m42a_lib.M42A	40C6
CPUVCORE_ISENSE_CAL	CPUVCORE_ISENSE_CAL - @m42a_lib.M42A	48A5
CPU_A20M_L	CPU_A20M_L - @m42a_lib.M42A	7C8 21C4
CPU_BSEL<0>	CPU_BSEL<0> - @m42a_lib.M42A	7B4 33C6
CPU_BSEL<1>	CPU_BSEL<1> - @m42a_lib.M42A	7B4 33B6
CPU_BSEL<2>	CPU_BSEL<2> - @m42a_lib.M42A	7B4 33B6
CPU_BSEL_R<0>	CPU_BSEL_R<0> - @m42a_lib.M42A	33C7
CPU_BSEL_R<1>	CPU_BSEL_R<1> - @m42a_lib.M42A	33B7
CPU_BSEL_R<2>	CPU_BSEL_R<2> - @m42a_lib.M42A	33B7
CPU_COMP<0>	CPU_COMP<0> - @m42a_lib.M42A	7B3
CPU_COMP<1>	CPU_COMP<1> - @m42a_lib.M42A	7B3
CPU_COMP<2>	CPU_COMP<2> - @m42a_lib.M42A	7B3
CPU_COMP<3>	CPU_COMP<3> - @m42a_lib.M42A	7B3
CPU_DPRSTP_L	CPU_DPRSTP_L - @m42a_lib.M42A	7B3 21C4 58C7
CPU_DPSLP_L	CPU_DPSLP_L - @m42a_lib.M42A	7B3 21C4
CPU_FERR_L	CPU_FERR_L - @m42a_lib.M42A	7C8 21C2
CPU_GTLREF	CPU_GTLREF - @m42a_lib.M42A	7B4
CPU_IGNNE_L	CPU_IGNNE_L - @m42a_lib.M42A	7C8 21C4
CPU_INIT_L	CPU_INIT_L - @m42a_lib.M42A	7D6 21C4
CPU_INTR	CPU_INTR - @m42a_lib.M42A	7C8 21C4
CPU_ISENSE_OUT_R	CPU_ISENSE_OUT_R - @m42a_lib.M42A	48C3
CPU_ISENSE_R_N	CPU_ISENSE_R_N - @m42a_lib.M42A	48C3
CPU_ISENSE_R_P	CPU_ISENSE_R_P - @m42a_lib.M42A	48C3
CPU_NMI	CPU_NMI - @m42a_lib.M42A	7C8 21C4
CPU_PROCHOT_L	CPU_PROCHOT_L - @m42a_lib.M42A	7C6 46B5 46C2 58C8
CPU_PSI_L	CPU_PSI_L - @m42a_lib.M42A	7A3 58C7
CPU_PWRGD	CPU_PWRGD - @m42a_lib.M42A	7B3 21C4
CPU_RCIN_L	CPU_RCIN_L - @m42a_lib.M42A	21C4
CPU_SMI_L	CPU_SMI_L - @m42a_lib.M42A	7C8 21C4
CPU_STPCLK_L	CPU_STPCLK_L - @m42a_lib.M42A	7C8 21C4
CPU_TEST1	CPU_TEST1 - @m42a_lib.M42A	7B4
CPU_TEST2	CPU_TEST2 - @m42a_lib.M42A	7B4

CPU_THERMAL_SCREW_DOWN	CPU_THERMAL_SCREW_DOWN - @m42a_lib.M42A	6A8
CPU_THERMAL_SCREW_RIGHT	CPU_THERMAL_SCREW_RIGHT - @m42a_lib.M42A	6A7
CPU_THERMAL_SCREW_UP	CPU_THERMAL_SCREW_UP - @m42a_lib.M42A	6A7
CPU_THERMD_N	CPU_THERMD_N - @m42a_lib.M42A	7C6 10B6
CPU_THERMD_P	CPU_THERMD_P - @m42a_lib.M42A	7C6 10B6
CPU_THERMTRIP_R	CPU_THERMTRIP_R - @m42a_lib.M42A	21C2
CPU_VCCSENSE_N	CPU_VCCSENSE_N - @m42a_lib.M42A	8B6 58A4 58A5
CPU_VCCSENSE_P	CPU_VCCSENSE_P - @m42a_lib.M42A	8B6 58A4 58A5
CPU_VID<0>	CPU_VID<0> - @m42a_lib.M42A	8B7 9C3
CPU_VID<1>	CPU_VID<1> - @m42a_lib.M42A	8B7 9C3
CPU_VID<2>	CPU_VID<2> - @m42a_lib.M42A	8B7 9C3
CPU_VID<3>	CPU_VID<3> - @m42a_lib.M42A	8B7 9C3
CPU_VID<4>	CPU_VID<4> - @m42a_lib.M42A	8B7 9C3
CPU_VID<5>	CPU_VID<5> - @m42a_lib.M42A	8B7 9D3
CPU_VID<6>	CPU_VID<6> - @m42a_lib.M42A	8B7 9D3
CPU_VID_R<0>	CPU_VID_R<0> - @m42a_lib.M42A	9C2 58C7
CPU_VID_R<0..6>	CPU_VID_R<0..6> - @m42a_lib.M42A	58A4
CPU_VID_R<1>	CPU_VID_R<1> - @m42a_lib.M42A	9C2 58C7
CPU_VID_R<2>	CPU_VID_R<2> - @m42a_lib.M42A	9C2 58C7
CPU_VID_R<3>	CPU_VID_R<3> - @m42a_lib.M42A	9C2 58C7
CPU_VID_R<4>	CPU_VID_R<4> - @m42a_lib.M42A	9C2 58C7
CPU_VID_R<5>	CPU_VID_R<5> - @m42a_lib.M42A	9D2 58C7
CPU_VID_R<6>	CPU_VID_R<6> - @m42a_lib.M42A	9D2 58C7
CPU_XDP_CLK_N	CPU_XDP_CLK_N - @m42a_lib.M42A	11B3 33D2 33D3
CPU_XDP_CLK_P	CPU_XDP_CLK_P - @m42a_lib.M42A	11B3 33D2 33D3
CRB_SV_DET	CRB_SV_DET - @m42a_lib.M42A	23B6 23C3
CRT_BLUE	CRT_BLUE - @m42a_lib.M42A	13B5 69B8
CRT_DDC_CLK	CRT_DDC_CLK - @m42a_lib.M42A	13B5 69D7
CRT_DDC_DATA	CRT_DDC_DATA - @m42a_lib.M42A	13B5 69D7
CRT_GREEN	CRT_GREEN - @m42a_lib.M42A	13B5 69A8
CRT_HSYNC_LS	CRT_HSYNC_LS - @m42a_lib.M42A	69C2
CRT_HSYNC_LS_R	CRT_HSYNC_LS_R - @m42a_lib.M42A	69C3
CRT_HSYNC_R	CRT_HSYNC_R - @m42a_lib.M42A	13B5 69C3
CRT_IREF	CRT_IREF - @m42a_lib.M42A	13B5 69C8
CRT_RED	CRT_RED - @m42a_lib.M42A	13B5 69A8
CRT_VSYNC_LS	CRT_VSYNC_LS - @m42a_lib.M42A	69C2
CRT_VSYNC_LS_R	CRT_VSYNC_LS_R - @m42a_lib.M42A	69C3
CRT_VSYNC_R	CRT_VSYNC_R - @m42a_lib.M42A	13B5 69C3
DCIN_ISENSE	DCIN_ISENSE - @m42a_lib.M42A	66C3
DEBUG_RST_L	DEBUG_RST_L - @m42a_lib.M42A	5C2 26B1 47C6
DMI_IRCOMP_R	DMI_IRCOMP_R - @m42a_lib.M42A	22C2
DMI_N2S_N<0>	DMI_N2S_N<0> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_N<1>	DMI_N2S_N<1> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_N<2>	DMI_N2S_N<2> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_N<3>	DMI_N2S_N<3> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_P<0>	DMI_N2S_P<0> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_P<1>	DMI_N2S_P<1> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_P<2>	DMI_N2S_P<2> - @m42a_lib.M42A	14B4 22D2
DMI_N2S_P<3>	DMI_N2S_P<3> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_N<0>	DMI_S2N_N<0> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_N<1>	DMI_S2N_N<1> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_N<2>	DMI_S2N_N<2> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_N<3>	DMI_S2N_N<3> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_P<0>	DMI_S2N_P<0> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_P<1>	DMI_S2N_P<1> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_P<2>	DMI_S2N_P<2> - @m42a_lib.M42A	14B4 22D2
DMI_S2N_P<3>	DMI_S2N_P<3> - @m42a_lib.M42A	14B4 22D2
ENETPWR_EN	ENETPWR_EN - @m42a_lib.M42A	60B5 60C5 60D4
ENET_BOB_SMITH_CAP	ENET_BOB_SMITH_CAP - @m42a_lib.M42A	37A5
ENET_CENTER_TAP<0>	ENET_CENTER_TAP<0> - @m42a_lib.M42A	37C6
ENET_CENTER_TAP<1>	ENET_CENTER_TAP<1> - @m42a_lib.M42A	37B6
ENET_CENTER_TAP<2>	ENET_CENTER_TAP<2> - @m42a_lib.M42A	37B6
ENET_CENTER_TAP<3>	ENET_CENTER_TAP<3> - @m42a_lib.M42A	37B6
ENET_CLK100M_PCIE_N	ENET_CLK100M_PCIE_N - @m42a_lib.M42A	33C3 33D2 36C6
ENET_CLK100M_PCIE_P	ENET_CLK100M_PCIE_P - @m42a_lib.M42A	33C3 33D2 36C6
ENET_CTRL12	ENET_CTRL12 - @m42a_lib.M42A ENET_CTRL12_SPN - @m42a_lib.M42A	6A4 36C8 6A3
ENET_CTRL25	ENET_CTRL25 - @m42a_lib.M42A ENET_CTRL25_SPN - @m42a_lib.M42A	6A4 36C8 6A3
ENET_LOM_DIS_L	ENET_LOM_DIS_L - @m42a_lib.M42A	36D8
ENET_MDI0	ENET_MDI0 - @m42a_lib.M42A	36B5
ENET_MDI1	ENET_MDI1 - @m42a_lib.M42A	36B4
ENET_MDI2	ENET_MDI2 - @m42a_lib.M42A	36B4
ENET_MDI3	ENET_MDI3 - @m42a_lib.M42A	36B3
ENET_MDI_N<0>	ENET_MDI_N<0> - @m42a_lib.M42A	36C3 37C8
ENET_MDI_N<1>	ENET_MDI_N<1> - @m42a_lib.M42A	36C3 37B8
ENET_MDI_N<2>	ENET_MDI_N<2> - @m42a_lib.M42A	36C3 37B8
ENET_MDI_N<3>	ENET_MDI_N<3> - @m42a_lib.M42A	36C3 37B8
ENET_MDI_P<0>	ENET_MDI_P<0> - @m42a_lib.M42A	36C3 37C8
ENET_MDI_P<1>	ENET_MDI_P<1> - @m42a_lib.M42A	36C3 37B8
ENET_MDI_P<2>	ENET_MDI_P<2> - @m42a_lib.M42A	36C3 37B8
ENET_MDI_P<3>	ENET_MDI_P<3> - @m42a_lib.M42A	36C3 37B8
ENET_MDI_TRAN_N<0>	ENET_MDI_TRAN_N<0> - @m42a_lib.M42A	37C5
ENET_MDI_TRAN_N<1>	ENET_MDI_TRAN_N<1> - @m42a_lib.M42A	37B5
ENET_MDI_TRAN_N<2>	ENET_MDI_TRAN_N<2> - @m42a_lib.M42A	5A7 37B5
ENET_MDI_TRAN_N<3>	ENET_MDI_TRAN_N<3> - @m42a_lib.M42A	37B5
ENET_MDI_TRAN_P<0>	ENET_MDI_TRAN_P<0> - @m42a_lib.M42A	37C5
ENET_MDI_TRAN_P<1>	ENET_MDI_TRAN_P<1> - @m42a_lib.M42A	37B5
ENET_MDI_TRAN_P<2>	ENET_MDI_TRAN_P<2> - @m42a_lib.M42A	5A7 37B5
ENET_MDI_TRAN_P<3>	ENET_MDI_TRAN_P<3> - @m42a_lib.M42A	5A7 37B5
ENET_PU_VDD_TTL0	ENET_PU_VDD_TTL0 - @m42a_lib.M42A	36A6 36C6
ENET_PU_VDD_TTL1	ENET_PU_VDD_TTL1 - @m42a_lib.M42A	36A6 36B6
ENET_RSET	ENET_RSET - @m42a_lib.M42A	36C8
ENET_RST_L	ENET_RST_L - @m42a_lib.M42A	26A1 36C6
ENET_VPD_CLK	ENET_VPD_CLK - @m42a_lib.M42A	36A2 36C6
ENET_VPD_DATA	ENET_VPD_DATA - @m42a_lib.M42A	36A2 36C6
ENET_XTALI	ENET_XTALI - @m42a_lib.M42A	36B6
ENET_XTALO	ENET_XTALO - @m42a_lib.M42A	36B6
EXTAUSB_OC_F_L	EXTAUSB_OC_F_L - @m42a_lib.M42A	42C8
EXTBUSB_OC_F_L	EXTBUSB_OC_F_L - @m42a_lib.M42A	42C8
EXT_COMPVID_B	EXT_COMPVID_B - @m42a_lib.M42A	69B6
EXT_C_R	EXT_C_R - @m42a_lib.M42A	69A6
EXT_Y_G	EXT_Y_G - @m42a_lib.M42A	69A6
FAN_RT_PWM	FAN_RT_PWM - @m42a_lib.M42A	5D2 51B3
FAN_RT_TACH	FAN_RT_TACH - @m42a_lib.M42A	5D2 51C3
FSB_ADSTB_L<0>	FSB_ADSTB_L<0> - @m42a_lib.M42A	7D8 12C4
FSB_ADSTB_L<1>	FSB_ADSTB_L<1> - @m42a_lib.M42A	7C8 12C4
FSB_ADS_L	FSB_ADS_L - @m42a_lib.M42A	7D6 12C4
FSB_A_L<3>	FSB_A_L<3> - @m42a_lib.M42A	7D8 12D4
FSB_A_L<4>	FSB_A_L<4> - @m42a_lib.M42A	7D8 12D4
FSB_A_L<5>	FSB_A_L<5> - @m42a_lib.M42A	7D8 12D4
FSB_A_L<6>	FSB_A_L<6> - @m42a_lib.M42A	7D8 12D4
FSB_A_L<7>	FSB_A_L<7> - @m42a_lib.M

FWPWR_EN	FWPWR_EN - @m42a_lib.M42A	39C5
FWPWR_EN_L	FWPWR_EN_L - @m42a_lib.M42A	39C4 60C8
FWPWR_EN_L_DIV	FWPWR_EN_L_DIV - @m42a_lib.M42A	39C5
FWPWR_EN_L_R	FWPWR_EN_L_R - @m42a_lib.M42A	60C7
FWPWR_RUN	FWPWR_RUN - @m42a_lib.M42A	39C6
FW_A_TPA_N	FW_A_TPA_N - @m42a_lib.M42A	38B3 39B6
	FW_PORT0_TPA_N - @m42a_lib.M42A	39B5
FW_A_TPA_P	FW_A_TPA_P - @m42a_lib.M42A	38B3 39B6
	FW_PORT0_TPA_P - @m42a_lib.M42A	39B5
FW_A_TPBIAS	FW_A_TPBIAS - @m42a_lib.M42A	38B3 39B6
FW_A_TPB_N	FW_A_TPB_N - @m42a_lib.M42A	38B3 39B6
	FW_PORT0_TPB_N - @m42a_lib.M42A	39B5
FW_A_TPB_P	FW_A_TPB_P - @m42a_lib.M42A	38B3 39B6
	FW_PORT0_TPB_P - @m42a_lib.M42A	39B5
FW_B_TPA_N	FW_B_TPA_N - @m42a_lib.M42A	6D2 38B3
	FW_B_TPA_N_SPN - @m42a_lib.M42A	5B7 6D1
FW_B_TPA_P	FW_B_TPA_P - @m42a_lib.M42A	6D2 38B3
	FW_B_TPA_P_SPN - @m42a_lib.M42A	5B7 6D1
FW_B_TPBIAS	FW_B_TPBIAS - @m42a_lib.M42A	6D2 38B3
	FW_B_TPBIAS_SPN - @m42a_lib.M42A	5B7 6D1
FW_B_TPB_N	FW_B_TPB_N - @m42a_lib.M42A	6D2 38B3
	FW_B_TPB_N_SPN - @m42a_lib.M42A	5B7 6D1
FW_B_TPB_P	FW_B_TPB_P - @m42a_lib.M42A	6D2 38B3
	FW_B_TPB_P_SPN - @m42a_lib.M42A	5B7 6D1
FW_C_TPA_N	FW_C_TPA_N - @m42a_lib.M42A	6D2 38B3
	FW_C_TPA_N_SPN - @m42a_lib.M42A	5B7 6D1
FW_C_TPA_P	FW_C_TPA_P - @m42a_lib.M42A	6D2 38B3
	FW_C_TPA_P_SPN - @m42a_lib.M42A	5B7 6D1
FW_C_TPBIAS	FW_C_TPBIAS - @m42a_lib.M42A	6D2 38B3
	FW_C_TPBIAS_SPN - @m42a_lib.M42A	5B7 6D1
FW_C_TPB_N	FW_C_TPB_N - @m42a_lib.M42A	6D2 38B3
	FW_C_TPB_N_SPN - @m42a_lib.M42A	5B7 6D1
FW_C_TPB_P	FW_C_TPB_P - @m42a_lib.M42A	6D2 38B3
	FW_C_TPB_P_SPN - @m42a_lib.M42A	5B7 6D1
FW_PCI_IDSEL	FW_PCI_IDSEL - @m42a_lib.M42A	38A5
FW_PCI_RST_L	FW_PCI_RST_L - @m42a_lib.M42A	38A5
FW_PORT0_TPA_N_FL	FW_PORT0_TPA_N_FL - @m42a_lib.M42A	39B2
FW_PORT0_TPA_P_FL	FW_PORT0_TPA_P_FL - @m42a_lib.M42A	39B2
FW_PORT0_TPB	FW_PORT0_TPB - @m42a_lib.M42A	39A5
FW_PORT0_TPB_N_FL	FW_PORT0_TPB_N_FL - @m42a_lib.M42A	39B2
FW_PORT0_TPB_P_FL	FW_PORT0_TPB_P_FL - @m42a_lib.M42A	39B2
FW_PWRON_RST_L	FW_PWRON_RST_L - @m42a_lib.M42A	38C3
FW_R0	FW_R0 - @m42a_lib.M42A	38B3
FW_R1	FW_R1 - @m42a_lib.M42A	38C3
FW_XI	FW_XI - @m42a_lib.M42A	38C3
FW_XO	FW_XO - @m42a_lib.M42A	38C3
FW_XO_R	FW_XO_R - @m42a_lib.M42A	38C3
GEYSER_GND_F	GEYSER_GND_F - @m42a_lib.M42A	40C5
GND_1V8S3_SGND	GND_1V8S3_SGND - @m42a_lib.M42A	61B5 61C6
GND_1V51V0S50_SGND	GND_1V51V0S50_SGND - @m42a_lib.M42A	52B7
GND_5V3V3S5_SGND	GND_5V3V3S5_SGND - @m42a_lib.M42A	59B7
GND_AUDIO_CODEC	GND_AUDIO_CODEC - @m42a_lib.M42A	5D1 64B2
	=GND_AUDIO_CODEC - @m42a_lib.M42A	54A6 54B6 54D2 55A8 55B8 55C8 56B3 56B5 57A5 57A6 57B3 57B3 57B5 57B8 57C3 57C5 57C8 57D8 64B3
GND_AUDIO_PWR	GND_AUDIO_PWR - @m42a_lib.M42A	5D1 64B2
	=GND_AUDIO_PWR - @m42a_lib.M42A	55A3 55A5 55A8 55B3 55B3 55B8 55C3 55C5 55C8 55D3 55D8 56C2 64B3
GND_AUDIO_SPDIF_DGND	GND_AUDIO_SPDIF_DGND - @m42a_lib.M42A	56A8 56C8
GND_BT_F	GND_BT_F - @m42a_lib.M42A	44B4
GND_CHASSIS_CPU	GND_CHASSIS_CPU - @m42a_lib.M42A	6B8
GND_CHASSIS_FANSCREW	GND_CHASSIS_FANSCREW - @m42a_lib.M42A	6B8
GND_CHGR_SGND	GND_CHGR_SGND - @m42a_lib.M42A	66A5 66B7
GND_IMVP6_SGND	GND_IMVP6_SGND - @m42a_lib.M42A	58A4 58B7 58C8
GND_SMC_AVSS	GND_SMC_AVSS - @m42a_lib.M42A	45C2 45C4 46B6 48A1 48B5 48C1 61C1 62A5 66B1 66C2
GND_SMC_LID_F	GND_SMC_LID_F - @m42a_lib.M42A	65A7
GPU_CRT_DDC_CLK	GPU_CRT_DDC_CLK - @m42a_lib.M42A	69B6 69D5
GPU_CRT_DDC_DATA	GPU_CRT_DDC_DATA - @m42a_lib.M42A	69B6 69D5
IDE_CSEL_PD	IDE_CSEL_PD - @m42a_lib.M42A	34B4
IDE_IRQ14	IDE_IRQ14 - @m42a_lib.M42A	21B6 34B6
IDE_PDA<0>	IDE_PDA<0> - @m42a_lib.M42A	21B5 34B5
IDE_PDA<1>	IDE_PDA<1> - @m42a_lib.M42A	21B5 34B5
IDE_PDA<2>	IDE_PDA<2> - @m42a_lib.M42A	21B5 34B3
IDE_PDCS1_L	IDE_PDCS1_L - @m42a_lib.M42A	21B5 34B5
IDE_PDCS3_L	IDE_PDCS3_L - @m42a_lib.M42A	21B5 34B3
IDE_PDD<0>	IDE_PDD<0> - @m42a_lib.M42A	21C5 34C5
IDE_PDD<1>	IDE_PDD<1> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<2>	IDE_PDD<2> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<3>	IDE_PDD<3> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<4>	IDE_PDD<4> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<5>	IDE_PDD<5> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<6>	IDE_PDD<6> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<7>	IDE_PDD<7> - @m42a_lib.M42A	21B5 34C5
IDE_PDD<8>	IDE_PDD<8> - @m42a_lib.M42A	21B5 34C3
IDE_PDD<9>	IDE_PDD<9> - @m42a_lib.M42A	21B5 34C3
IDE_PDD<10>	IDE_PDD<10> - @m42a_lib.M42A	21B5 34C3
IDE_PDD<11>	IDE_PDD<11> - @m42a_lib.M42A	21B5 34C3
IDE_PDD<12>	IDE_PDD<12> - @m42a_lib.M42A	21B5 34C3
IDE_PDD<13>	IDE_PDD<13> - @m42a_lib.M42A	21B5 34B5
IDE_PDD<14>	IDE_PDD<14> - @m42a_lib.M42A	21B5 34C3
IDE_PDD<15>	IDE_PDD<15> - @m42a_lib.M42A	21B5 34C3
IDE_PDDACK_L	IDE_PDDACK_L - @m42a_lib.M42A	21B6 34B3
IDE_PDDREQ	IDE_PDDREQ - @m42a_lib.M42A	21B6 34B6
IDE_PDIORDY	IDE_PDIORDY - @m42a_lib.M42A	21B6 34B6
IDE_PDIOR_L	IDE_PDIOR_L - @m42a_lib.M42A	21B6 34C3
IDE_PDIOW_L	IDE_PDIOW_L - @m42a_lib.M42A	21B6 34B5
IDE_RESET_L	IDE_RESET_L - @m42a_lib.M42A	23A3 34C5
IMVP6_BOOT1	IMVP6_BOOT1 - @m42a_lib.M42A	58A8 58C6
IMVP6_BOOT1_RC	IMVP6_BOOT1_RC - @m42a_lib.M42A	58D5
IMVP6_BOOT2	IMVP6_BOOT2 - @m42a_lib.M42A	58A6 58C6
IMVP6_BOOT2_RC	IMVP6_BOOT2_RC - @m42a_lib.M42A	58C5
IMVP6_COMP	IMVP6_COMP - @m42a_lib.M42A	5D7 58A4 58B7
IMVP6_COMP_RC	IMVP6_COMP_RC - @m42a_lib.M42A	58B8
IMVP6_CPU_ISENSE_N	IMVP6_CPU_ISENSE_N - @m42a_lib.M42A	48C4
IMVP6_CPU_ISENSE_P	IMVP6_CPU_ISENSE_P - @m42a_lib.M42A	48D4
IMVP6_DFB	IMVP6_DFB - @m42a_lib.M42A	58A4 58B6
IMVP6_DROOP	IMVP6_DROOP - @m42a_lib.M42A	48D5 58A4 58B6
IMVP6_FB	IMVP6_FB - @m42a_lib.M42A	58A4 58B7
IMVP6_FB2	IMVP6_FB2 - @m42a_lib.M42A	58A4 58B7
IMVP6_FET_RC1	IMVP6_FET_RC1 - @m42a_lib.M42A	58A8 58C2
IMVP6_FET_RC2	IMVP6_FET_RC2 - @m42a_lib.M42A	58A6 58B2
IMVP6_ISEN1	IMVP6_ISEN1 - @m42a_lib.M42A	58A8 58C6
IMVP6_ISEN2	IMVP6_ISEN2 - @m42a_lib.M42A	58A6 58C6
IMVP6_LGATE1	IMVP6_LGATE1 - @m42a_lib.M42A	58A8 58C6
IMVP6_LGATE2	IMVP6_LGATE2 - @m42a_lib.M42A	58A6 58C6
IMVP6_NTC	IMVP6_NTC - @m42a_lib.M42A	58C7
IMVP6_NTC_R	IMVP6_NTC_R - @m42a_lib.M42A	58C7
IMVP6_OCSET	IMVP6_OCSET - @m42a_lib.M42A	58A4 58B6
IMVP6_PHASE1	IMVP6_PHASE1 - @m42a_lib.M42A	58A8 58C6

IMVP6_PHASE2	IMVP6_PHASE2 - @m42a_lib.M42A	58A6 58C6
IMVP6_RBIAS	IMVP6_RBIAS - @m42a_lib.M42A	5D7 58A4 58B7
IMVP6_RTN	IMVP6_RTN - @m42a_lib.M42A	58A4 58B6
IMVP6_SOFT	IMVP6_SOFT - @m42a_lib.M42A	58A4 58C7
IMVP6_UGATE1	IMVP6_UGATE1 - @m42a_lib.M42A	58A8 58C6
IMVP6_UGATE2	IMVP6_UGATE2 - @m42a_lib.M42A	58A6 58C6
IMVP6_VDIFF	IMVP6_VDIFF - @m42a_lib.M42A	58A4 58B7
IMVP6_VDIFF_RC	IMVP6_VDIFF_RC - @m42a_lib.M42A	58B7
IMVP6_VO	IMVP6_VO - @m42a_lib.M42A	48C5 58A4 58B6
IMVP6_VO_R	IMVP6_VO_R - @m42a_lib.M42A	58B4
IMVP6_VO_R1	IMVP6_VO_R1 - @m42a_lib.M42A	58A8
IMVP6_VO_R2	IMVP6_VO_R2 - @m42a_lib.M42A	58A6
IMVP6_VR_TT	IMVP6_VR_TT - @m42a_lib.M42A	58C7
IMVP6_VSEN	IMVP6_VSEN - @m42a_lib.M42A	58A4 58B5
IMVP6_VSUM	IMVP6_VSUM - @m42a_lib.M42A	58A4 58C6
IMVP6_VSUM_R1	IMVP6_VSUM_R1 - @m42a_lib.M42A	58A8
IMVP6_VSUM_R2	IMVP6_VSUM_R2 - @m42a_lib.M42A	58A6
IMVP6_VW	IMVP6_VW - @m42a_lib.M42A	58A4 58B7
IMVP_DPRSLPVR	IMVP_DPRSLPVR - @m42a_lib.M42A	58C7
IMVP_VR_ON	IMVP_VR_ON - @m42a_lib.M42A	45D8 58C7
INT_PIRQA_L	INT_PIRQA_L - @m42a_lib.M42A	22A7 26C3
INT_PIRQB_L	INT_PIRQB_L - @m42a_lib.M42A	22A7 26C3
INT_PIRQC_L	INT_PIRQC_L - @m42a_lib.M42A	22A7 26C3
INT_PIRQD_L	INT_PIRQD_L - @m42a_lib.M42A	22A7 26C3 38A5
INT_SERIRQ	INT_SERIRQ - @m42a_lib.M42A	5C2 23C8 45C8 47C5 53C6
INVT_CHGND	INVT_CHGND - @m42a_lib.M42A	6D8 67C2
INV_BKLIGHT_PWM_L	INV_BKLIGHT_PWM_L - @m42a_lib.M42A	5B1 67D2
INV_GND	INV_GND - @m42a_lib.M42A	5B1 67D2
INV_PWREN_F_L	INV_PWREN_F_L - @m42a_lib.M42A	67D6
INV_PWREN_L	INV_PWREN_L - @m42a_lib.M42A	67D6
IR_RX_OUT	IR_RX_OUT - @m42a_lib.M42A	35C6 41C6
IR_RX_OUT_F	IR_RX_OUT_F - @m42a_lib.M42A	41C5
ISENSE_CAL_EN	ISENSE_CAL_EN - @m42a_lib.M42A	45B8 48A8
ISENSE_CAL_EN_L	ISENSE_CAL_EN_L - @m42a_lib.M42A	48A7
ISENSE_CAL_EN_LS5V	ISENSE_CAL_EN_LS5V - @m42a_lib.M42A	48A6
ITPRESET_L	ITPRESET_L - @m42a_lib.M42A	11B3
ITP_TDO	ITP_TDO - @m42a_lib.M42A	11B3
J2900_SA1	J2900_SA1 - @m42a_lib.M42A	29A4
KBC_MDE	KBC_MDE - @m42a_lib.M42A	45C2
LCDVDD_PWREN_L	LCDVDD_PWREN_L - @m42a_lib.M42A	67B7
LCDVDD_PWREN_L_R	LCDVDD_PWREN_L_R - @m42a_lib.M42A	67B6
LPC_AD<0>	LPC_AD<0> - @m42a_lib.M42A	5D2 21D4 45D8 47C6 53C6
LPC_AD<1>	LPC_AD<1> - @m42a_lib.M42A	5D2 21D4 45D8 47C6 53C6
LPC_AD<2>	LPC_AD<2> - @m42a_lib.M42A	5C2 21D4 45D8 47C5 53C6
LPC_AD<3>	LPC_AD<3> - @m42a_lib.M42A	5C2 21D4 45D8 47C5 53C6
LPC_FRAME_L	LPC_FRAME_L - @m42a_lib.M42A	5C2 21C5 45C8 47C6 53C6
LVDS_A_CLK_N	LVDS_A_CLK_N - @m42a_lib.M42A	13D5 67B2
LVDS_A_CLK_P	LVDS_A_CLK_P - @m42a_lib.M42A	13C5 67B2
LVDS_A_DATA_N<0>	LVDS_A_DATA_N<0> - @m42a_lib.M42A	13C5 67B2
LVDS_A_DATA_N<1>	LVDS_A_DATA_N<1> - @m42a_lib.M42A	13C5 67B2
LVDS_A_DATA_N<2>	LVDS_A_DATA_N<2> - @m42a_lib.M42A	13C5 67B2
LVDS_A_DATA_P<0>	LVDS_A_DATA_P<0> - @m42a_lib.M42A	13C5 67B2
LVDS_A_DATA_P<1>	LVDS_A_DATA_P<1> - @m42a_lib.M42A	13C5 67B2
LVDS_A_DATA_P<2>	LVDS_A_DATA_P<2> - @m42a_lib.M42A	13C5 67B2
LVDS_BKLTCTL	LVDS_BKLTCTL - @m42a_lib.M42A	13D5 67C6
LVDS_BKLTEN	LVDS_BKLTEN - @m42a_lib.M42A	13D5 67D7
LVDS_B_CLK_N	LVDS_B_CLK_N - @m42a_lib.M42A	6D6 13C5
	LVDS_B_CLK_N_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_CLK_P	LVDS_B_CLK_P - @m42a_lib.M42A	6D6 13C5
	LVDS_B_CLK_P_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_DATA_N<0>	LVDS_B_DATA_N<0> - @m42a_lib.M42A	6D6 13C5
	LVDS_B_DATA_N0_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_DATA_N<1>	LVDS_B_DATA_N<1> - @m42a_lib.M42A	6D6 13C5
	LVDS_B_DATA_N1_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_DATA_N<2>	LVDS_B_DATA_N<2> - @m42a_lib.M42A	6D6 13C5
	LVDS_B_DATA_N2_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_DATA_P<0>	LVDS_B_DATA_P<0> - @m42a_lib.M42A	6D6 13C5
	LVDS_B_DATA_P0_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_DATA_P<1>	LVDS_B_DATA_P<1> - @m42a_lib.M42A	6D6 13C5
	LVDS_B_DATA_P1_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_B_DATA_P<2>	LVDS_B_DATA_P<2> - @m42a_lib.M42A	6D6 13C5
	LVDS_B_DATA_P2_SPN - @m42a_lib.M42A	5A7 6D5
LVDS_CLKCTLA	LVDS_CLKCTLA - @m42a_lib.M42A	13D5 67A7
LVDS_CLKCTLB	LVDS_CLKCTLB - @m42a_lib.M42A	13D5 67A7
LVDS_DDC_CLK	LVDS_DDC_CLK - @m42a_lib.M42A	13D5 67B6
LVDS_DDC_DATA	LVDS_DDC_DATA - @m42a_lib.M42A	13D5 67B6
LVDS_IBG	LVDS_IBG - @m42a_lib.M42A	13D5 67A6
LVDS_VDDEN	LVDS_VDDEN - @m42a_lib.M42A	13D5 67B7
MAX9705_L_N	MAX9705_L_N - @m42a_lib.M42A	55B6
MAX9705_R_N	MAX9705_R_N - @m42a_lib.M42A	55C6
MAX9705_SUB_N	MAX9705_SUB_N - @m42a_lib.M42A	55A6
MAX9890_CEXT	MAX9890_CEXT - @m42a_lib.M42A	57B1
MAX9890_INL	MAX9890_INL - @m42a_lib.M42A	57B2
MAX9890_INR	MAX9890_INR - @m42a_lib.M42A	57B2
MEMVTT_EN	MEMVTT_EN - @m42a_lib.M42A	31B5
MEMVTT_VREF	MEMVTT_VREF - @m42a_lib.M42A	31C4
MEM_A_A<0>	MEM_A_A<0> - @m42a_lib.M42A	15C5 28B4
MEM_A_A<13..0>	MEM_A_A<13..0> - @m42a_lib.M42A	30C6
MEM_A_A<1>	MEM_A_A<1> - @m42a_lib.M42A	15C5 28B6
MEM_A_A<2>	MEM_A_A<2> - @m42a_lib.M42A	15C5 28B4
MEM_A_A<3>	MEM_A_A<3> - @m42a_lib.M42A	15B5 28B6
MEM_A_A<4>	MEM_A_A<4> - @m42a_lib.M42A	15B5 28B4
MEM_A_A<5>	MEM_A_A<5> - @m42a_lib.M42A	15B5 28B6
MEM_A_A<6>	MEM_A_A<6> - @m42a_lib.M42A	15B5 28C4
MEM_A_A<7>	MEM_A_A<7> - @m42a_lib.M42A	15B5 28C4
MEM_A_A<8>	MEM_A_A<8> - @m42a_lib.M42A	15B5 28C6
MEM_A_A<9>	MEM_A_A<9> - @m42a_lib.M42A	15B5 28C6
MEM_A_A<10>	MEM_A_A<10> - @m42a_lib.M42A	15B5 28B6
MEM_A_A<11>	MEM_A_A<11> - @m42a_lib.M42A	15B5 28C4
MEM_A_A<12>	MEM_A_A<12> - @m42a_lib.M42A	15B5 28C6
MEM_A_A<13>	MEM_A_A<13> - @m42a_lib.M42A	15B5 28B4
MEM_A_A<14>	MEM_A_A<14> - @m42a_lib.M42A	6A4 28C4
	MEM_A_A14_SPN - @m42a_lib.M42A	6A3
MEM_A_A<15>	MEM_A_A<15> - @m42a_lib.M42A	6A4 28C4
	MEM_A_A15_SPN - @m42a_lib.M42A	6A3
MEM_A_BS<0>	MEM_A_BS<0> - @m42a_lib.M42A	15D5 28B6
MEM_A_BS<2..0>	MEM_A_BS<2..0> - @m42a_lib.M42A	30C6
MEM_A_BS<1>	MEM_A_BS<1> - @m42a_lib.M42A	15D5 28B4
MEM_A_BS<2>	MEM_A_BS<2> - @m42a_lib.M42A	15D5 28C6
MEM_A_CAS_L	MEM_A_CAS_L - @m42a_lib.M42A	15D5 28B6 30B6
MEM_A_DM<0>	MEM_A_DM<0> - @m42a_lib.M42A	15D5 28D4
MEM_A_DM<1>	MEM_A_DM<1> - @m42a_lib.M42A	15D5 28D4
MEM_A_DM<2>	MEM_A_DM<2> - @m42a_lib.M42A	15D5 28C6
MEM_A_DM<3>	MEM_A_DM<3> - @m42a_lib.M42A	15C5 28C4
MEM_A_DM<4>	MEM_A_DM<4> - @m42a_lib.M42A	15C5 28B4
MEM_A_DM<5>	MEM_A_DM<5> - @m42a_lib.M42A	15C5 28B6
MEM_A_DM<6>	MEM_A_DM<6> - @m42a_lib.M42A	15C5 28A6
MEM_A_DM<7>	MEM_A_DM<7> - @m42a_lib.M42A	15C5 28A4
MEM_A_DQ<0>	MEM_A_DQ<0> - @m42a_lib.M42A	15D7 28D4
MEM_A_DQ<1>	MEM_A_DQ<1> - @m42a_lib.M42A	15D7 28D4
MEM_A_DQ<2>	MEM_A_DQ<2> - @m42a_lib.M42A	15D7 28D6
MEM_A_DQ<3>	MEM_A_DQ<3> - @m42a_lib.M42A	15D7 28D6
MEM_A_DQ<4>	MEM_A_DQ<4> - @m42a_lib.M42A	15D7 28D4
MEM_A_DQ<5>	MEM_A_DQ<5> - @m42a_lib.M42A	15D7 28D4

MEM_A_DQ<6>	MEM_A_DQ<6> - @m42a_lib.M42A	15D7 28D6
MEM_A_DQ<7>	MEM_A_DQ<7> - @m42a_lib.M42A	15D7 28D6
MEM_A_DQ<8>	MEM_A_DQ<8> - @m42a_lib.M42A	15C7 28D6
MEM_A_DQ<9>	MEM_A_DQ<9> - @m42a_lib.M42A	15C7 28D6
MEM_A_DQ<10>	MEM_A_DQ<10> - @m42a_lib.M42A	15C7 28D6
MEM_A_DQ<11>	MEM_A_DQ<11> - @m42a_lib.M42A	15C7 28D4
MEM_A_DQ<12>	MEM_A_DQ<12> - @m42a_lib.M42A	15C7 28D4
MEM_A_DQ<13>	MEM_A_DQ<13> - @m42a_lib.M42A	15C7 28D6
MEM_A_DQ<14>	MEM_A_DQ<14> - @m42a_lib.M42A	15C7 28D4
MEM_A_DQ<15>	MEM_A_DQ<15> - @m42a_lib.M42A	15C7 28D4
MEM_A_DQ<16>	MEM_A_DQ<16> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<17>	MEM_A_DQ<17> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<18>	MEM_A_DQ<18> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<19>	MEM_A_DQ<19> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<20>	MEM_A_DQ<20> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<21>	MEM_A_DQ<21> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<22>	MEM_A_DQ<22> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<23>	MEM_A_DQ<23> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<24>	MEM_A_DQ<24> - @m42a_lib.M42A	15C7 28D6
MEM_A_DQ<25>	MEM_A_DQ<25> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<26>	MEM_A_DQ<26> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<27>	MEM_A_DQ<27> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<28>	MEM_A_DQ<28> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<29>	MEM_A_DQ<29> - @m42a_lib.M42A	15C7 28D4
MEM_A_DQ<30>	MEM_A_DQ<30> - @m42a_lib.M42A	15C7 28C4
MEM_A_DQ<31>	MEM_A_DQ<31> - @m42a_lib.M42A	15C7 28C6
MEM_A_DQ<32>	MEM_A_DQ<32> - @m42a_lib.M42A	15C7 28B6
MEM_A_DQ<33>	MEM_A_DQ<33> - @m42a_lib.M42A	15C7 28B4
MEM_A_DQ<34>	MEM_A_DQ<34> - @m42a_lib.M42A	15B7 28B4
MEM_A_DQ<35>	MEM_A_DQ<35> - @m42a_lib.M42A	15B7 28B4
MEM_A_DQ<36>	MEM_A_DQ<36> - @m42a_lib.M42A	15B7 28B4
MEM_A_DQ<37>	MEM_A_DQ<37> - @m42a_lib.M42A	15B7 28B6
MEM_A_DQ<38>	MEM_A_DQ<38> - @m42a_lib.M42A	15B7 28B6
MEM_A_DQ<39>	MEM_A_DQ<39> - @m42a_lib.M42A	15B7 28B6
MEM_A_DQ<40>	MEM_A_DQ<40> - @m42a_lib.M42A	15B7 28B4
MEM_A_DQ<41>	MEM_A_DQ<41> - @m42a_lib.M42A	15B7 28B6
MEM_A_DQ<42>	MEM_A_DQ<42> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<43>	MEM_A_DQ<43> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<44>	MEM_A_DQ<44> - @m42a_lib.M42A	15B7 28B6
MEM_A_DQ<45>	MEM_A_DQ<45> - @m42a_lib.M42A	15B7 28B4
MEM_A_DQ<46>	MEM_A_DQ<46> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<47>	MEM_A_DQ<47> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<48>	MEM_A_DQ<48> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<49>	MEM_A_DQ<49> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<50>	MEM_A_DQ<50> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<51>	MEM_A_DQ<51> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<52>	MEM_A_DQ<52> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<53>	MEM_A_DQ<53> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<54>	MEM_A_DQ<54> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<55>	MEM_A_DQ<55> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<56>	MEM_A_DQ<56> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<57>	MEM_A_DQ<57> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<58>	MEM_A_DQ<58> - @m42a_lib.M42A	15B7 28A6
MEM_A_DQ<59>	MEM_A_DQ<59> - @m42a_lib.M42A	15B7 28A4
MEM_A_DQ<60>	MEM_A_DQ<60> - @m42a_lib.M42A	15A7 28A4
MEM_A_DQ<61>	MEM_A_DQ<61> - @m42a_lib.M42A	15A7 28A4
MEM_A_DQ<62>	MEM_A_DQ<62> - @m42a_lib.M42A	15A7 28A4
MEM_A_DQ<63>	MEM_A_DQ<63> - @m42a_lib.M42A	15A7 28A6
MEM_A_DQS_N<0>	MEM_A_DQS_N<0> - @m42a_lib.M42A	15C5 28D6
MEM_A_DQS_N<1>	MEM_A_DQS_N<1> - @m42a_lib.M42A	15C5 28D6
MEM_A_DQS_N<2>	MEM_A_DQS_N<2> - @m42a_lib.M42A	15C5 28C4
MEM_A_DQS_N<3>	MEM_A_DQS_N<3> - @m42a_lib.M42A	15C5 28C6
MEM_A_DQS_N<4>	MEM_A_DQS_N<4> - @m42a_lib.M42A	15C5 28B6
MEM_A_DQS_N<5>	MEM_A_DQS_N<5> - @m42a_lib.M42A	15C5 28B4
MEM_A_DQS_N<6>	MEM_A_DQS_N<6> - @m42a_lib.M42A	15C5 28A4
MEM_A_DQS_N<7>	MEM_A_DQS_N<7> - @m42a_lib.M42A	15C5 28A6
MEM_A_DQS_P<0>	MEM_A_DQS_P<0> - @m42a_lib.M42A	15C5 28D6
MEM_A_DQS_P<1>	MEM_A_DQS_P<1> - @m42a_lib.M42A	15C5 28D6
MEM_A_DQS_P<2>	MEM_A_DQS_P<2> - @m42a_lib.M42A	15C5 28C4
MEM_A_DQS_P<3>	MEM_A_DQS_P<3> - @m42a_lib.M42A	15C5 28C6
MEM_A_DQS_P<4>	MEM_A_DQS_P<4> - @m42a_lib.M42A	15C5 28B6
MEM_A_DQS_P<5>	MEM_A_DQS_P<5> - @m42a_lib.M42A	15C5 28B4
MEM_A_DQS_P<6>	MEM_A_DQS_P<6> - @m42a_lib.M42A	15C5 28A4
MEM_A_DQS_P<7>	MEM_A_DQS_P<7> - @m42a_lib.M42A	15C5 28A6
MEM_A_RAS_L	MEM_A_RAS_L - @m42a_lib.M42A	15B5 28B4 30B6
MEM_A_WE_L	MEM_A_WE_L - @m42a_lib.M42A	15B5 28B6 30B6
MEM_B_A<0>	MEM_B_A<0> - @m42a_lib.M42A	15C2 29B4 30B5
MEM_B_A<1>	MEM_B_A<1> - @m42a_lib.M42A	15C2 29B6 30B5
MEM_B_A<2>	MEM_B_A<2> - @m42a_lib.M42A	15C2 29B4 30B5
MEM_B_A<3>	MEM_B_A<3> - @m42a_lib.M42A	15B2 29B6 30B5
MEM_B_A<4>	MEM_B_A<4> - @m42a_lib.M42A	15B2 29B4 30B5
MEM_B_A<5>	MEM_B_A<5> - @m42a_lib.M42A	15B2 29B6 30B5
MEM_B_A<6>	MEM_B_A<6> - @m42a_lib.M42A	15B2 29C4 30B5
MEM_B_A<7>	MEM_B_A<7> - @m42a_lib.M42A	15B2 29C4 30B5
MEM_B_A<8>	MEM_B_A<8> - @m42a_lib.M42A	15B2 29C6 30B5
MEM_B_A<9>	MEM_B_A<9> - @m42a_lib.M42A	15B2 29C6 30B5
MEM_B_A<10>	MEM_B_A<10> - @m42a_lib.M42A	15B2 29B6 30B5
MEM_B_A<11>	MEM_B_A<11> - @m42a_lib.M42A	15B2 29C4 30A5
MEM_B_A<12>	MEM_B_A<12> - @m42a_lib.M42A	15B2 29C6 30A5
MEM_B_A<13>	MEM_B_A<13> - @m42a_lib.M42A	15B2 29B4 30A5
MEM_B_A<14>	MEM_B_A<14> - @m42a_lib.M42A	6A4 29C4
	MEM_B_A14

NB_CFG<10>	NB_CFG<10> - @m42a_lib.M42A TP_NB_CFG10 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<11>	NB_CFG<11> - @m42a_lib.M42A TP_NB_CFG11 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<12>	NB_CFG<12> - @m42a_lib.M42A TP_NB_CFG12 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<13>	NB_CFG<13> - @m42a_lib.M42A TP_NB_CFG13 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<14>	NB_CFG<14> - @m42a_lib.M42A TP_NB_CFG14 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<15>	NB_CFG<15> - @m42a_lib.M42A TP_NB_CFG15 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<16>	NB_CFG<16> - @m42a_lib.M42A	14C6 20C5
NB_CFG<17>	NB_CFG<17> - @m42a_lib.M42A TP_NB_CFG17 - @m42a_lib.M42A	6D4 14C6 6D3
NB_CFG<18>	NB_CFG<18> - @m42a_lib.M42A	14C6 20B5
NB_CFG<19>	NB_CFG<19> - @m42a_lib.M42A	14C6 20B5
NB_CFG<20>	NB_CFG<20> - @m42a_lib.M42A	14B6 20A5
NB_CLK100M_GCLKIN_N	NB_CLK100M_GCLKIN_N - @m42a_lib.M42A	14C4 33B2 33C4
NB_CLK100M_GCLKIN_P	NB_CLK100M_GCLKIN_P - @m42a_lib.M42A	14C4 33C2 33C4
NB_CLK_DREFCLKIN_N	NB_CLK_DREFCLKIN_N - @m42a_lib.M42A	14C4 33B3 33C2
NB_CLK_DREFCLKIN_P	NB_CLK_DREFCLKIN_P - @m42a_lib.M42A	14C4 33B3 33C2
NB_CLK_DREFSSCLKIN_N	NB_CLK_DREFSSCLKIN_N - @m42a_lib.M42A	14C4 33A4 33C2
NB_CLK_DREFSSCLKIN_P	NB_CLK_DREFSSCLKIN_P - @m42a_lib.M42A	14B4 33A3 33C2
NB_FSB_VREF	NB_FSB_VREF - @m42a_lib.M42A	12C4
NB_FSB_XRCOMP	NB_FSB_XRCOMP - @m42a_lib.M42A	12A6
NB_FSB_XSCOMP	NB_FSB_XSCOMP - @m42a_lib.M42A	12A6
NB_FSB_XSWING	NB_FSB_XSWING - @m42a_lib.M42A	12A6
NB_FSB_YRCOMP	NB_FSB_YRCOMP - @m42a_lib.M42A	12A6
NB_FSB_YSCOMP	NB_FSB_YSCOMP - @m42a_lib.M42A	12A6
NB_FSB_YSWING	NB_FSB_YSWING - @m42a_lib.M42A	12A6
NB_ISENSE	NB_ISENSE - @m42a_lib.M42A	62A6
NB_ISENSE_R1_N	NB_ISENSE_R1_N - @m42a_lib.M42A	62A7
NB_ISENSE_R1_P	NB_ISENSE_R1_P - @m42a_lib.M42A	62A7
NB_ISENSE_R2	NB_ISENSE_R2 - @m42a_lib.M42A	62A6
NB_ISENSE_VCC	NB_ISENSE_VCC - @m42a_lib.M42A	62A6
NB_RIGHT_DOWN_SCREW	NB_RIGHT_DOWN_SCREW - @m42a_lib.M42A	6A8
NB_RST_IN_L_R	NB_RST_IN_L_R - @m42a_lib.M42A	14B6
NB_SB_SYNC_L	NB_SB_SYNC_L - @m42a_lib.M42A	14B6 22A6
NB_TV_DCONSEL0	NB_TV_DCONSEL0 - @m42a_lib.M42A	14D6
NB_TV_DCONSEL1	NB_TV_DCONSEL1 - @m42a_lib.M42A	14C6
NB_VCCSM_LF1	NB_VCCSM_LF1 - @m42a_lib.M42A	16B4
NB_VCCSM_LF2	NB_VCCSM_LF2 - @m42a_lib.M42A	16B4
NB_VCCSM_LF4	NB_VCCSM_LF4 - @m42a_lib.M42A	16B8
NB_VCCSM_LF5	NB_VCCSM_LF5 - @m42a_lib.M42A	16B8
NB_VTTLF_CAP1	NB_VTTLF_CAP1 - @m42a_lib.M42A	17A4
NB_VTTLF_CAP2	NB_VTTLF_CAP2 - @m42a_lib.M42A	17A4
NB_VTTLF_CAP3	NB_VTTLF_CAP3 - @m42a_lib.M42A	17B4
ODD_PWR_EN_SLOW_START	ODD_PWR_EN_SLOW_START - @m42a_lib.M42A	34C7
ODD_PWR_EN_SLOW_START_L	ODD_PWR_EN_SLOW_START_L - @m42a_lib.M42A	34C6
ODD_PWR_EN_SLOW_START_L_R	ODD_PWR_EN_SLOW_START_L_R - @m42a_lib.M42A	34C5
ONEWIRE_DCIN_DIV	ONEWIRE_DCIN_DIV - @m42a_lib.M42A	65C5
ONEWIRE_EN	ONEWIRE_EN - @m42a_lib.M42A	65C7
ONEWIRE_ESD	ONEWIRE_ESD - @m42a_lib.M42A	65C5
ONEWIRE_OV	ONEWIRE_OV - @m42a_lib.M42A	65C6
ONEWIRE_PU_EN	ONEWIRE_PU_EN - @m42a_lib.M42A	65B7
ONEWIRE_PU_EN_L	ONEWIRE_PU_EN_L - @m42a_lib.M42A	65C8
ONEWIRE_PWR_EN_L	ONEWIRE_PWR_EN_L - @m42a_lib.M42A	65C7
ONEWIRE_PWR_EN_L_DIV	ONEWIRE_PWR_EN_L_DIV - @m42a_lib.M42A	65C6
P0V52_SMC_LSREF	P0V52_SMC_LSREF - @m42a_lib.M42A	46D3
P1V8S0_EN_L_RC	P1V8S0_EN_L_RC - @m42a_lib.M42A	63A5
P3V3S0_EN_RC	P3V3S0_EN_RC - @m42a_lib.M42A	63B5
P3V3S3_EN_L_RC	P3V3S3_EN_L_RC - @m42a_lib.M42A	63C5
P3V42G3H5_BOOST	P3V42G3H5_BOOST - @m42a_lib.M42A	63D2
P3V42G3H_FB	P3V42G3H_FB - @m42a_lib.M42A	5D7 63D2
P5VS0_EN_RC	P5VS0_EN_RC - @m42a_lib.M42A	63C5
P5VS3_EN_L_RC	P5VS3_EN_L_RC - @m42a_lib.M42A	63D5
PATA_PWR_EN_L	PATA_PWR_EN_L - @m42a_lib.M42A	23B3 23C3
PBUS_S0_SMC_VSENSE	PBUS_S0_SMC_VSENSE - @m42a_lib.M42A	48C6
PBUS_SMC_VSENSE_EN	PBUS_SMC_VSENSE_EN - @m42a_lib.M42A	48C8
PBUS_SMC_VSENSE_EN_L	PBUS_SMC_VSENSE_EN_L - @m42a_lib.M42A	48C7
PCIE_A_D2R_C_N	PCIE_A_D2R_C_N - @m42a_lib.M42A	36D6
PCIE_A_D2R_C_P	PCIE_A_D2R_C_P - @m42a_lib.M42A	36D6
PCIE_A_D2R_N	PCIE_A_D2R_N - @m42a_lib.M42A	22D4 36D5
PCIE_A_D2R_P	PCIE_A_D2R_P - @m42a_lib.M42A	22D4 36D5
PCIE_A_R2D_C_N	PCIE_A_R2D_C_N - @m42a_lib.M42A	22D4 36C5
PCIE_A_R2D_C_P	PCIE_A_R2D_C_P - @m42a_lib.M42A	22D4 36C5
PCIE_A_R2D_N	PCIE_A_R2D_N - @m42a_lib.M42A	36C6
PCIE_A_R2D_P	PCIE_A_R2D_P - @m42a_lib.M42A	36C6
PCIE_B_D2R_N	PCIE_B_D2R_N - @m42a_lib.M42A	22D4 43C7
PCIE_B_D2R_P	PCIE_B_D2R_P - @m42a_lib.M42A	22D4 43C7
PCIE_B_R2D_C_N	PCIE_B_R2D_C_N - @m42a_lib.M42A	22D4 43B7
PCIE_B_R2D_C_P	PCIE_B_R2D_C_P - @m42a_lib.M42A	22D4 43B7
PCIE_B_R2D_N	PCIE_B_R2D_N - @m42a_lib.M42A	43B6
PCIE_B_R2D_P	PCIE_B_R2D_P - @m42a_lib.M42A	43B6
PCIE_C_D2R_N	PCIE_C_D2R_N - @m42a_lib.M42A PCIE_C_D2R_N_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_C_D2R_P	PCIE_C_D2R_P - @m42a_lib.M42A PCIE_C_D2R_P_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_C_R2D_C_N	PCIE_C_R2D_C_N - @m42a_lib.M42A PCIE_C_R2D_C_N_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_C_R2D_C_P	PCIE_C_R2D_C_P - @m42a_lib.M42A PCIE_C_R2D_C_P_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_D_D2R_N	PCIE_D_D2R_N - @m42a_lib.M42A PCIE_D_D2R_N_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_D_D2R_P	PCIE_D_D2R_P - @m42a_lib.M42A PCIE_D_D2R_P_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_D_R2D_C_N	PCIE_D_R2D_C_N - @m42a_lib.M42A PCIE_D_R2D_C_N_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_D_R2D_C_P	PCIE_D_R2D_C_P - @m42a_lib.M42A PCIE_D_R2D_C_P_SPN - @m42a_lib.M42A	6C4 22D4 6C3
PCIE_E_D2R_N	PCIE_E_D2R_N - @m42a_lib.M42A PCIE_E_D2R_N_SPN - @m42a_lib.M42A	6C4 22C4 6C3
PCIE_E_D2R_P	PCIE_E_D2R_P - @m42a_lib.M42A PCIE_E_D2R_P_SPN - @m42a_lib.M42A	6C4 22C4 6C3
PCIE_E_R2D_C_N	PCIE_E_R2D_C_N - @m42a_lib.M42A PCIE_E_R2D_C_N_SPN - @m42a_lib.M42A	6C4 22C4 6C3
PCIE_E_R2D_C_P	PCIE_E_R2D_C_P - @m42a_lib.M42A PCIE_E_R2D_C_P_SPN - @m42a_lib.M42A	6C4 22C4 6C3
PCIE_F_D2R_N	PCIE_F_D2R_N - @m42a_lib.M42A PCIE_F_D2R_N_SPN - @m42a_lib.M42A	6C4 22C4 6C3
PCIE_F_D2R_P	PCIE_F_D2R_P - @m42a_lib.M42A PCIE_F_D2R_P_SPN - @m42a_lib.M42A	6C4 22C4 6C3
PCIE_F_R2D_C_N	PCIE_F_R2D_C_N - @m42a_lib.M42A	6C4 22C4

	PCIE_F_R2D_C_N_SPN - @m42a_lib.M42A	6C3
PCIE_F_R2D_C_P	PCIE_F_R2D_C_P - @m42a_lib.M42A PCIE_F_R2D_C_P_SPN - @m42a_lib.M42A	6B4 22C4 6B3
PCIE_WAKE_L	PCIE_WAKE_L - @m42a_lib.M42A	23C8 36C6 43C6
PCI_AD<0>	PCI_AD<0> - @m42a_lib.M42A	22B7 38C5
PCI_AD<1>	PCI_AD<1> - @m42a_lib.M42A	22B7 38C5
PCI_AD<2>	PCI_AD<2> - @m42a_lib.M42A	22B7 38C5
PCI_AD<3>	PCI_AD<3> - @m42a_lib.M42A	22B7 38C5
PCI_AD<4>	PCI_AD<4> - @m42a_lib.M42A	22B7 38C5
PCI_AD<5>	PCI_AD<5> - @m42a_lib.M42A	22B7 38C5
PCI_AD<6>	PCI_AD<6> - @m42a_lib.M42A	22B7 38C5
PCI_AD<7>	PCI_AD<7> - @m42a_lib.M42A	22B7 38C5
PCI_AD<8>	PCI_AD<8> - @m42a_lib.M42A	22B7 38C5
PCI_AD<9>	PCI_AD<9> - @m42a_lib.M42A	22B7 38C5
PCI_AD<10>	PCI_AD<10> - @m42a_lib.M42A	22B7 38C5
PCI_AD<11>	PCI_AD<11> - @m42a_lib.M42A	22B7 38C5
PCI_AD<12>	PCI_AD<12> - @m42a_lib.M42A	22B7 38B5
PCI_AD<13>	PCI_AD<13> - @m42a_lib.M42A	22B7 38B5
PCI_AD<14>	PCI_AD<14> - @m42a_lib.M42A	22B7 38B5
PCI_AD<15>	PCI_AD<15> - @m42a_lib.M42A	22B7 38B5
PCI_AD<16>	PCI_AD<16> - @m42a_lib.M42A	22B7 38B5
PCI_AD<17>	PCI_AD<17> - @m42a_lib.M42A	22B7 38B5
PCI_AD<18>	PCI_AD<18> - @m42a_lib.M42A	22B7 38B5
PCI_AD<19>	PCI_AD<19> - @m42a_lib.M42A	22A7 38B6
PCI_AD<20>	PCI_AD<20> - @m42a_lib.M42A	22A7 38B5
PCI_AD<21>	PCI_AD<21> - @m42a_lib.M42A	22A7 38B5
PCI_AD<22>	PCI_AD<22> - @m42a_lib.M42A	22A7 38B5
PCI_AD<23>	PCI_AD<23> - @m42a_lib.M42A	22A7 38B5
PCI_AD<24>	PCI_AD<24> - @m42a_lib.M42A	22A7 38B5
PCI_AD<25>	PCI_AD<25> - @m42a_lib.M42A	22A7 38B5
PCI_AD<26>	PCI_AD<26> - @m42a_lib.M42A	22A7 38B5
PCI_AD<27>	PCI_AD<27> - @m42a_lib.M42A	22A7 38B5
PCI_AD<28>	PCI_AD<28> - @m42a_lib.M42A	22A7 38B5
PCI_AD<29>	PCI_AD<29> - @m42a_lib.M42A	22A7 38B5
PCI_AD<30>	PCI_AD<30> - @m42a_lib.M42A	22A7 38B5
PCI_AD<31>	PCI_AD<31> - @m42a_lib.M42A	22A7 38B5
PCI_CLK_FW	PCI_CLK_FW - @m42a_lib.M42A	33D6 38A5
PCI_CLK_PORT80_LPC	PCI_CLK_PORT80_LPC - @m42a_lib.M42A	5C2 33D6 47C5
PCI_CLK_SB	PCI_CLK_SB - @m42a_lib.M42A	22A6 33D6
PCI_CLK_SMC	PCI_CLK_SMC - @m42a_lib.M42A	33D6 45C8
PCI_CLK_TPM	PCI_CLK_TPM - @m42a_lib.M42A	33D6 53C6
PCI_C_BE_L<0>	PCI_C_BE_L<0> - @m42a_lib.M42A	22B6 38B5
PCI_C_BE_L<1>	PCI_C_BE_L<1> - @m42a_lib.M42A	22B6 38B5
PCI_C_BE_L<2>	PCI_C_BE_L<2> - @m42a_lib.M42A	22B6 38B5
PCI_C_BE_L<3>	PCI_C_BE_L<3> - @m42a_lib.M42A	22B6 38B5
PCI_DEVSEL_L	PCI_DEVSEL_L - @m42a_lib.M42A	22A6 26D3 38A5
PCI_FRAME_L	PCI_FRAME_L - @m42a_lib.M42A	22A7 26D3 38A5
PCI_GNT3_L	PCI_GNT3_L - @m42a_lib.M42A	22B6 38A5
PCI_IRDY_L	PCI_IRDY_L - @m42a_lib.M42A	22A6 26D3 38A5
PCI_LOCK_L	PCI_LOCK_L - @m42a_lib.M42A	22A6 26D3 38A5
PCI_PAR	PCI_PAR - @m42a_lib.M42A	22A6 38B5
PCI_PERR_L	PCI_PERR_L - @m42a_lib.M42A	22A6 26D3 38A5
PCI_PME_FW_L	PCI_PME_FW_L - @m42a_lib.M42A	22B5 38A5
PCI_REQ0_L	PCI_REQ0_L - @m42a_lib.M42A	22B6 26C3
PCI_REQ1_L	PCI_REQ1_L - @m42a_lib.M42A	22B6 26C3
PCI_REQ2_L	PCI_REQ2_L - @m42a_lib.M42A	22B6 26C3
PCI_REQ3_L	PCI_REQ3_L - @m42a_lib.M42A	22B6 26C3 38A5
PCI_RST_L	PCI_RST_L - @m42a_lib.M42A	22A6 38A6
PCI_SERR_L	PCI_SERR_L - @m42a_lib.M42A	22A6 26D3 38A5
PCI_STOP_L	PCI_STOP_L - @m42a_lib.M42A	22A6 26D3 38A5
PCI_TRDY_L	PCI_TRDY_L - @m42a_lib.M42A	22A6 26D3 38A5
PEG_COMP	PEG_COMP - @m42a_lib.M42A	13D3
PEG_D2R_N<0>	PEG_D2R_N<0> - @m42a_lib.M42A PEG_D2R_N0_SPN - @m42a_lib.M42A	6D6 13D3 6D5
PEG_D2R_N<1>	PEG_D2R_N<1> - @m42a_lib.M42A	13D3 68B6
PEG_D2R_N<2>	PEG_D2R_N<2> - @m42a_lib.M42A PEG_D2R_N2_SPN - @m42a_lib.M42A	6D6 13D3 6D5
PEG_D2R_N<3>	PEG_D2R_N<3> - @m42a_lib.M42A PEG_D2R_N3_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<4>	PEG_D2R_N<4> - @m42a_lib.M42A PEG_D2R_N4_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<5>	PEG_D2R_N<5> - @m42a_lib.M42A PEG_D2R_N5_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<6>	PEG_D2R_N<6> - @m42a_lib.M42A PEG_D2R_N6_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<7>	PEG_D2R_N<7> - @m42a_lib.M42A PEG_D2R_N7_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<8>	PEG_D2R_N<8> - @m42a_lib.M42A PEG_D2R_N8_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<9>	PEG_D2R_N<9> - @m42a_lib.M42A PEG_D2R_N9_SPN - @m42a_lib.M42A	6C6 13D3 6C5
PEG_D2R_N<10>	PEG_D2R_N<10> - @m42a_lib.M42A PEG_D2R_N10_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_N<11>	PEG_D2R_N<11> - @m42a_lib.M42A PEG_D2R_N11_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_N<12>	PEG_D2R_N<12> - @m42a_lib.M42A PEG_D2R_N12_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_N<13>	PEG_D2R_N<13> - @m42a_lib.M42A PEG_D2R_N13_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_N<14>	PEG_D2R_N<14> - @m42a_lib.M42A PEG_D2R_N14_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_N<15>	PEG_D2R_N<15> - @m42a_lib.M42A PEG_D2R_N15_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<0>	PEG_D2R_P<0> - @m42a_lib.M42A PEG_D2R_P0_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<1>	PEG_D2R_P<1> - @m42a_lib.M42A	13C3 68B6
PEG_D2R_P<2>	PEG_D2R_P<2> - @m42a_lib.M42A PEG_D2R_P2_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<3>	PEG_D2R_P<3> - @m42a_lib.M42A PEG_D2R_P3_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<4>	PEG_D2R_P<4> - @m42a_lib.M42A PEG_D2R_P4_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<5>	PEG_D2R_P<5> - @m42a_lib.M42A PEG_D2R_P5_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<6>	PEG_D2R_P<6> - @m42a_lib.M42A PEG_D2R_P6_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<7>	PEG_D2R_P<7> - @m42a_lib.M42A PEG_D2R_P7_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<8>	PEG_D2R_P<8> - @m42a_lib.M42A PEG_D2R_P8_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<9>	PEG_D2R_P<9> - @m42a_lib.M42A PEG_D2R_P9_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<10>	PEG_D2R_P<10> - @m42a_lib.M42A PEG_D2R_P10_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<11>	PEG_D2R_P<11> - @m42a_lib.M42A PEG_D2R_P11_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<12>	PEG_D2R_P<12> - @m42a_lib.M42A PEG_D2R_P12_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<13>	PEG_D2R_P<13> - @m42a_lib.M42A PEG_D2R_P13_SPN - @m42a_lib.M42A	6C6 13C3 6C5
PEG_D2R_P<14>	PEG_D2R_P<14> - @m42a_lib.M42A PEG_D2R_P14_SPN - @m42a_lib.M42A	6B6 13C3 6B5
PEG_D2R_P<15>	PEG_D2R_P<15> - @m42a_lib.M42A PEG_D2R_P15_SPN - @m42a_lib.M42A	6B6 13C3 6B5

PEG_R2D_C_N<0>	PEG_R2D_C_N<0> - @m42a_lib.M42A	13C3 68C6
PEG_R2D_C_N<1>	PEG_R2D_C_N<1> - @m42a_lib.M42A	13C3 68C6
PEG_R2D_C_N<2>	PEG_R2D_C_N<2> - @m42a_lib.M42A	13C3 68B6
PEG_R2D_C_N<3>	PEG_R2D_C_N<3> - @m42a_lib.M42A	13B3 68B6
PEG_R2D_C_N<4>	PEG_R2D_C_N<4> - @m42a_lib.M42A PEG_R2D_C_N4_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<5>	PEG_R2D_C_N<5> - @m42a_lib.M42A PEG_R2D_C_N5_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<6>	PEG_R2D_C_N<6> - @m42a_lib.M42A PEG_R2D_C_N6_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<7>	PEG_R2D_C_N<7> - @m42a_lib.M42A PEG_R2D_C_N7_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<8>	PEG_R2D_C_N<8> - @m42a_lib.M42A PEG_R2D_C_N8_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<9>	PEG_R2D_C_N<9> - @m42a_lib.M42A PEG_R2D_C_N9_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<10>	PEG_R2D_C_N<10> - @m42a_lib.M42A PEG_R2D_C_N10_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<11>	PEG_R2D_C_N<11> - @m42a_lib.M42A PEG_R2D_C_N11_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<12>	PEG_R2D_C_N<12> - @m42a_lib.M42A PEG_R2D_C_N12_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<13>	PEG_R2D_C_N<13> - @m42a_lib.M42A PEG_R2D_C_N13_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<14>	PEG_R2D_C_N<14> - @m42a_lib.M42A PEG_R2D_C_N14_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_N<15>	PEG_R2D_C_N<15> - @m42a_lib.M42A PEG_R2D_C_N15_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<0>	PEG_R2D_C_P<0> - @m42a_lib.M42A	13B3 68C6
PEG_R2D_C_P<1>	PEG_R2D_C_P<1> - @m42a_lib.M42A	13B3 68C6
PEG_R2D_C_P<2>	PEG_R2D_C_P<2> - @m42a_lib.M42A	13B3 68B6
PEG_R2D_C_P<3>	PEG_R2D_C_P<3> - @m42a_lib.M42A	13B3 68B6
PEG_R2D_C_P<4>	PEG_R2D_C_P<4> - @m42a_lib.M42A PEG_R2D_C_P4_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<5>	PEG_R2D_C_P<5> - @m42a_lib.M42A PEG_R2D_C_P5_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<6>	PEG_R2D_C_P<6> - @m42a_lib.M42A PEG_R2D_C_P6_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<7>	PEG_R2D_C_P<7> - @m42a_lib.M42A PEG_R2D_C_P7_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<8>	PEG_R2D_C_P<8> - @m42a_lib.M42A PEG_R2D_C_P8_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<9>	PEG_R2D_C_P<9> - @m42a_lib.M42A PEG_R2D_C_P9_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<10>	PEG_R2D_C_P<10> - @m42a_lib.M42A PEG_R2D_C_P10_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<11>	PEG_R2D_C_P<11> - @m42a_lib.M42A PEG_R2D_C_P11_SPN - @m42a_lib.M42A	6B6 13B3 6B5
PEG_R2D_C_P<12>	PEG_R2D_C_P<12> - @m42a_lib.M42A PEG_R2D_C_P12_SPN - @m42a_lib.M42A	6B6 13A3 6B5
PEG_R2D_C_P<13>	PEG_R2D_C_P<13> - @m42a_lib.M42A PEG_R2D_C_P13_SPN - @m42a_lib.M42A	6B6 13A3 6B5
PEG_R2D_C_P<14>	PEG_R2D_C_P<14> - @m42a_lib.M42A PEG_R2D_C_P14_SPN - @m42a_lib.M42A	6B6 13A3 6B5
PEG_R2D_C_P<15>	PEG_R2D_C_P<15> - @m42a_lib.M42A PEG_R2D_C_P15_SPN - @m42a_lib.M42A	6B6 13A3 6B5
PLT_RST_BUF_L	PLT_RST_BUF_L - @m42a_lib.M42A	26B3
PLT_RST_GATED_L	PLT_RST_GATED_L - @m42a_lib.M42A	26A3
PLT_RST_L	PLT_RST_L - @m42a_lib.M42A NB_RST_IN_L - @m42a_lib.M42A	22A6 26C3 14B7 26C1
PM_BATLOW_L	PM_BATLOW_L - @m42a_lib.M42A	23C1 45B8
PM_BMBUSY_L	PM_BMBUSY_L - @m42a_lib.M42A	14B6 23C5
PM_CLKRUN_L	PM_CLKRUN_L - @m42a_lib.M42A	5C2 23C8 38A5 45D5 47C6 53C6
PM_DPRSLPVR	PM_DPRSLPVR - @m42a_lib.M42A	14B7 23C3 58D8
PM_DPRSLPVR_R	PM_DPRSLPVR_R - @m42a_lib.M42A	14B6
PM_EXTTS_L<0>	PM_EXTTS_L<0> - @m42a_lib.M42A DIMM_OVERTEMP_L - @m42a_lib.M42A	6B2 14B7 45B8 6B1 28C4 29C4
PM_LAN_ENABLE	PM_LAN_ENABLE - @m42a_lib.M42A	23C3 45D8
PM_PWRBTN_L	PM_PWRBTN_L - @m42a_lib.M42A	23C3 45D8
PM_RI_L	PM_RI_L - @m42a_lib.M42A	23D5
PM_RSMRST_L	PM_RSMRST_L - @m42a_lib.M42A	23C1 45D8
PM_SB_PWROK	PM_SB_PWROK - @m42a_lib.M42A	23C3 26A6
PM_SLP_S3	PM_SLP_S3 - @m42a_lib.M42A	48C8 63B7
PM_SLP_S3BATT	PM_SLP_S3BATT - @m42a_lib.M42A	66C7
PM_SLP_S3_L	PM_SLP_S3_L - @m42a_lib.M42A	23C3 45C5 63A7 63A7 63B8
PM_SLP_S3_LS12V6	PM_SLP_S3_LS12V6 - @m42a_lib.M42A	63B7
PM_SLP_S4_L	PM_SLP_S4_L - @m42a_lib.M42A	23C3 45C5 60C8 61B8 63D6
PM_SLP_S5_L	PM_SLP_S5_L - @m42a_lib.M42A	23C3 45C5 46D3
PM_STPCPU_L	PM_STPCPU_L - @m42a_lib.M42A	23C8 32C4
PM_STPPCI_L	PM_STPPCI_L - @m42a_lib.M42A	23C8 32C4
PM_SUS_STAT_L	PM_SUS_STAT_L - @m42a_lib.M42A XDP_DBRESET_L_R - @m42a_lib.M42A	5C2 23C5 45D5 46D3 47C5 53C6 26C6
PM_SYSRST_L	PM_SYSRST_L - @m42a_lib.M42A	23C5 26C5 45C8
PM_THRMTRIP_L	PM_THRMTRIP_L - @m42a_lib.M42A	7C6 14B6 21C2 46B3
PM_THRM_L	PM_THRM_L - @m42a_lib.M42A	23C8 45B8
PP0V9_S0	PP0V9_S0 - @m42a_lib.M42A =PP0V9_S0_MEM_TERM - @m42a_lib.M42A =PP0V9_S0_MEM_REG - @m42a_lib.M42A =PP0V9_S0_MEM_TERM - @m42a_lib.M42A =PP0V9_S0_MEM_REG - @m42a_lib.M42A	5A2 64D7 30D4 64D6 31B3 63B2 64D8 30D4 64D6 31B3 63B2 64D8
PP1V2_S0	PP1V2_S0 - @m42a_lib.M42A	63B4
PP1V2_S3	PP1V2_S3 - @m42a_lib.M42A =PP1V2_S3_REG - @m42a_lib.M42A =PP1V2_S3_ENET - @m42a_lib.M42A =PP1V2_S3_REG - @m42a_lib.M42A =PP1V2_S3_ENET - @m42a_lib.M42A	5A2 64C4 60B2 63B5 64C6 36A8 36D7 64C3 60B2 63B5 64C6 36A8 36D7 64C3
PP1V5_S0_DPLL	PP1V5_S0_DPLL - @m42a_lib.M42A	19D5
PP1V5_S0_NB_3GPLL_F	PP1V5_S0_NB_3GPLL_F - @m42a_lib.M42A	19A4
PP1V5_S0_NB_QTVDAC	PP1V5_S0_NB_QTVDAC - @m42a_lib.M42A	19A7
PP1V5_S0_NB_VCC3G	PP1V5_S0_NB_VCC3G - @m42a_lib.M42A	17D6 19B2
PP1V5_S0_NB_VCCA_3GP LL	PP1V5_S0_NB_VCCA_3GPLL - @m42a_lib.M42A	17D6 19A2
PP1V5_S0_NB_VCCA_DPL LA	PP1V5_S0_NB_VCCA_DPLLA - @m42a_lib.M42A	17C6 19D4
PP1V5_S0_NB_VCCA_DPL LB	PP1V5_S0_NB_VCCA_DPLLB - @m42a_lib.M42A	17C6 19D4
PP1V5_S0_NB_VCCA_HPL L	PP1V5_S0_NB_VCCA_HPLL - @m42a

	=PP3V3_S5_P3V3S3 - @m42a_lib.m42A	63D5 64A3	
	=PP3V3_S5_P3V3S0 - @m42a_lib.m42A	63C5 64A3	
	=PP3V3_S5_ROM - @m42a_lib.m42A	50D4 64A3	
	=PP3V3_S5_SB_3V3_1V5_VCCSUSHDA - @m42a_lib.m42A	24C3 64A3	
	=PP3V3_S5_SB_IO - @m42a_lib.m42A	22C6 64A3	
	=PP3V3_S5_SB_VCCSUS3_3_USB - @m42a_lib.m42A	24B3 25D2 64A3	
	=PP3V3_S5_SB_PM - @m42a_lib.m42A	11B5 23D1 26C5 64A3	
	=PP3V3_S5_SB_VCCSUS3_3 - @m42a_lib.m42A	24A5 24B3 25B6 25D2 64A3	
	=PP3V3_S5_REG - @m42a_lib.m42A	59B8 64A6	
	=PP3V3_S5_SB - @m42a_lib.m42A	23A7 23B7 23D4 23D8 25C8 64A3	
	=PP3V3_S5_SB_USB - @m42a_lib.m42A	22D8 64A3	
	=PP3V3_S5_SB_VCCSUS3_3_USB - @m42a_lib.m42A	24B3 25D2 64A3	
	=PP3V3_S5_SB_VCCSUS3_3 - @m42a_lib.m42A	24A5 24B3 25B6 25D2 64A3	
	=PP3V3_S5_SB_USB - @m42a_lib.m42A	22D8 64A3	
	=PP3V3_S5_SB_PM - @m42a_lib.m42A	11B5 23D1 26C5 64A3	
	=PP3V3_S5_SB_IO - @m42a_lib.m42A	22C6 64A3	
	=PP3V3_S5_SB_3V3_1V5_VCCSUSHDA - @m42a_lib.m42A	24C3 64A3	
	=PP3V3_S5_SB - @m42a_lib.m42A	23A7 23B7 23D4 23D8 25C8 64A3	
	=PP3V3_S5_ROM - @m42a_lib.m42A	50D4 64A3	
	=PP3V3_S5_REG - @m42a_lib.m42A	59B8 64A6	
	=PP3V3_S5_P3V3S3 - @m42a_lib.m42A	63D5 64A3	
	=PP3V3_S5_P3V3S0 - @m42a_lib.m42A	63C5 64A3	
	=PP3V3_S5_LCD - @m42a_lib.m42A	64A3 67C7	
	=PP3V3_S5_FWLATEVG - @m42a_lib.m42A	39A8 64A3	
PP3V3_S5_FWLATEVG	PP3V3_S5_FWLATEVG - @m42a_lib.m42A	39A6 39B5	
PP3V3_S5_FWLATEVG_F	PP3V3_S5_FWLATEVG_F - @m42a_lib.m42A	39A7	
PP3V3_S5_REG_P	PP3V3_S5_REG_P - @m42a_lib.m42A	59B8	
PP3V42G3H_SW	PP3V42G3H_SW - @m42a_lib.m42A	63D2	
PP3V42_G3H_LIDSWITCH_F	PP3V42_G3H_LIDSWITCH_F - @m42a_lib.m42A	65A7	
PP3V42_G3H_SMC_CLK_F	PP3V42_G3H_SMC_CLK_F - @m42a_lib.m42A	46A7	
PP3V42_ONEWIRE	PP3V42_ONEWIRE - @m42a_lib.m42A	65C7	
PP4V5_AUDIO_ANALOG	PP4V5_AUDIO_ANALOG - @m42a_lib.m42A	54A3 54D2 57C3 57C5	
PP5V_INV	PP5V_INV - @m42a_lib.m42A	67D5	
PP5V_INV_F	PP5V_INV_F - @m42a_lib.m42A	5B1 67D3	
PP5V_S0_AUDIO	PP5V_S0_AUDIO - @m42a_lib.m42A	5D1	
PP5V_S0_AUDIO_F	PP5V_S0_AUDIO_F - @m42a_lib.m42A	55B8 55B8 55C4	
PP5V_S0_AUDIO_PWR	PP5V_S0_AUDIO_PWR - @m42a_lib.m42A	5D1	
PP5V_S0_DVIPORT	PP5V_S0_DVIPORT - @m42a_lib.m42A	68A6 69B4 69C3	
PP5V_S0_DVIPORT_D	PP5V_S0_DVIPORT_D - @m42a_lib.m42A	64B3 69C5	
PP5V_S0_IMVP6_VDD	PP5V_S0_IMVP6_VDD - @m42a_lib.m42A	58D7	
PP5V_S0_SB_V5REF	PP5V_S0_SB_V5REF - @m42a_lib.m42A	24D5 25D7	
PP5V_S0_TMDS_FUSE	PP5V_S0_TMDS_FUSE - @m42a_lib.m42A	69C5	
PP5V_S3	PP5V_S3 - @m42a_lib.m42A	5A2 64B4	
	=PP5V_S3_IR - @m42a_lib.m42A	41D6 64B3	
	=PP5V_S3_GEYSER - @m42a_lib.m42A	40D6 64B3	
	=PP5V_S3_CAMERA - @m42a_lib.m42A	64B3 67A5	
	=PP5V_S3_FET - @m42a_lib.m42A	63D3 64B6	
	=PP5V_S3_SYSLED - @m42a_lib.m42A	35B6 46B4 64B3	
	=PP5V_S3_IR - @m42a_lib.m42A	41D6 64B3	
	=PP5V_S3_GEYSER - @m42a_lib.m42A	40D6 64B3	
	=PP5V_S3_FET - @m42a_lib.m42A	63D3 64B6	
	=PP5V_S3_CAMERA - @m42a_lib.m42A	64B3 67A5	
PP5V_S3_CAMERA_F	PP5V_S3_CAMERA_F - @m42a_lib.m42A	67A3	
PP5V_S3_GEYSER_F	PP5V_S3_GEYSER_F - @m42a_lib.m42A	40D5	
PP5V_S3_SYSLED_F	PP5V_S3_SYSLED_F - @m42a_lib.m42A	35B8	
PP5V_S3_USB2_EXTA	PP5V_S3_USB2_EXTA - @m42a_lib.m42A	42C7	
PP5V_S3_USB2_EXTA_F	PP5V_S3_USB2_EXTA_F - @m42a_lib.m42A	42D2 42D3	
PP5V_S3_USB2_EXTB	PP5V_S3_USB2_EXTB - @m42a_lib.m42A	42C7	
PP5V_S3_USB2_EXTB_F	PP5V_S3_USB2_EXTB_F - @m42a_lib.m42A	42B2 42C3	
PP5V_S5	PP5V_S5 - @m42a_lib.m42A	5A2 64A4	
	=PP5V_S5_IVBS3 - @m42a_lib.m42A	61C7 64A3	
	=PP5V_S5_PATA - @m42a_lib.m42A	34D6 64A3	
	=PP5V_S5_USB - @m42a_lib.m42A	42C8 64A3	
	=PP5V_S5_P5VS0 - @m42a_lib.m42A	63C5 64A3	
	=PP5V_S5_PWRCTL - @m42a_lib.m42A	63A7 63D6 64A3	
	=PP5V_S5_REG - @m42a_lib.m42A	59B1 64A6	
	=PP5V_S5_P5VS3 - @m42a_lib.m42A	63D5 64A3	
	=PP5V_S5_SB - @m42a_lib.m42A	25C8 64A3	
	=PP5V_S5_USB - @m42a_lib.m42A	42C8 64A3	
	=PP5V_S5_SB - @m42a_lib.m42A	25C8 64A3	
	=PP5V_S5_REG - @m42a_lib.m42A	59B1 64A6	
	=PP5V_S5_PWRCTL - @m42a_lib.m42A	63A7 63D6 64A3	
	=PP5V_S5_PATA - @m42a_lib.m42A	34D6 64A3	
	=PP5V_S5_P5VS3 - @m42a_lib.m42A	63D5 64A3	
	=PP5V_S5_P5VS0 - @m42a_lib.m42A	63C5 64A3	
	=PP5V_S5_1V8S3 - @m42a_lib.m42A	61C7 64A3	
PP5V_S5_1V51V05S0_IN TVCC	PP5V_S5_1V51V05S0_INTVCC - @m42a_lib.m42A	62A2 62C3 62C6	
PP5V_S5_5V3V3S5_INTVCC	PP5V_S5_5V3V3S5_INTVCC - @m42a_lib.m42A	59A2 59C3 59C6	
PP5V_S5_REG_P	PP5V_S5_REG_P - @m42a_lib.m42A	59A6 59B1	
PP5V_S5_SB_V5REF_SUS	PP5V_S5_SB_V5REF_SUS - @m42a_lib.m42A	24D5 25C7	
PP18V5_DCIN	PP18V5_DCIN - @m42a_lib.m42A	65D4	
PP18V5_DCIN_F	PP18V5_DCIN_F - @m42a_lib.m42A	65D7	
PP18V5_DCIN_ONEWIRE	PP18V5_DCIN_ONEWIRE - @m42a_lib.m42A	65C6	
PP18V5_G3H	PP18V5_G3H - @m42a_lib.m42A	5A2 64C1	
	=PP18V5_G3H_INRUSH - @m42a_lib.m42A	64C3 65D1	
	=PP18V5_G3H_CHGR - @m42a_lib.m42A	64C1 66D8	
	=PP18V5_G3H_INRUSH - @m42a_lib.m42A	64C3 65D1	
	=PP18V5_G3H_CHGR - @m42a_lib.m42A	64C1 66D8	
PP18V5_S5_CHGR_SW_R	PP18V5_S5_CHGR_SW_R - @m42a_lib.m42A	66C4	
PPBUSA_G3H	PPBUSA_G3H - @m42a_lib.m42A	5A2	
PPBUSB_G3H	PPBUSB_G3H - @m42a_lib.m42A	5A2 64C1	
	=PPBUS_S5_YUKON_CTRL - @m42a_lib.m42A	60C8 64C1	
	=PPVIN_S5_IMVP6 - @m42a_lib.m42A	48C7 58C2 58D5 58D8 64C1	
	=PPVIN_S5_1V51V05S0 - @m42a_lib.m42A	62D8 64C1	
	=PPBUSB_G3H - @m42a_lib.m42A	64C3 66C2	
	=PPBUS_S5_INV - @m42a_lib.m42A	64C1 67D4	
	=PPBUS_S5_FWPWRSW - @m42a_lib.m42A	39D6 64C1	
	=PPVIN_S5_5V3V3S5 - @m42a_lib.m42A	59D8 63B7 64C1	
	=PPVIN_S5_1V8S3 - @m42a_lib.m42A	61C7 64C1	
	=PPVIN_S5_IMVP6 - @m42a_lib.m42A	48C7 58C2 58D5 58D8 64C1	
	=PPVIN_S5_5V3V3S5 - @m42a_lib.m42A	59D8 63B7 64C1	
	=PPVIN_S5_1V8S3 - @m42a_lib.m42A	61C7 64C1	
	=PPVIN_S5_1V51V05S0 - @m42a_lib.m42A	62D8 64C1	

	=PPBUS_S5_YUKON_CTRL - @m42a_lib.m42A	60C8 64C1	
	=PPBUS_S5_INV - @m42a_lib.m42A	64C1 67D4	
	=PPBUS_S5_FWPWRSW - @m42a_lib.m42A	39D6 64C1	
	=PPBUSB_G3H - @m42a_lib.m42A	64C3 66C2	
	=PPBUSA_G3H - @m42a_lib.m42A	64C3 66C2	
PPBUS_ALL_INV_CONN	PPBUS_ALL_INV_CONN - @m42a_lib.m42A	5B1 67D3	
PPBUS_S5_FWPWRSW_F	PPBUS_S5_FWPWRSW_F - @m42a_lib.m42A	39D6	
PPDCIN_G3H_R	PPDCIN_G3H_R - @m42a_lib.m42A	65D4	
PPFW_PORT0_VP	PPFW_PORT0_VP - @m42a_lib.m42A	39C2	
PPFW_PORT0_VP_F	PPFW_PORT0_VP_F - @m42a_lib.m42A	39C3	
PPFW_SWITCH	PPFW_SWITCH - @m42a_lib.m42A	5B2 39D4	
PPVBATT_G3C_RTC	PPVBATT_G3C_RTC - @m42a_lib.m42A	26D6	
PPVBATT_G3C_RTC_R	PPVBATT_G3C_RTC_R - @m42a_lib.m42A	26D5	
PPVBATT_G3H_PRE	PPVBATT_G3H_PRE - @m42a_lib.m42A	66B3	
PPVBATT_G3H_R	PPVBATT_G3H_R - @m42a_lib.m42A	66B2	
PPVBAT_G3H_CHGR_OUT	PPVBAT_G3H_CHGR_OUT - @m42a_lib.m42A	5C1 66B5 66C2	
PPVBAT_G3H_CHGR_REG	PPVBAT_G3H_CHGR_REG - @m42a_lib.m42A	66C4	
PPVCORE_CPU_S0	PPVCORE_CPU_S0 - @m42a_lib.m42A	5B2 64D7	
	=PPVCORE_S0_CPU - @m42a_lib.m42A	8B5 8D7 9B8 48A5 48B3 64D6	
	=PPVOUT_S0_IMVP6_REG - @m42a_lib.m42A	58D1 64D8	
	=PPVCORE_S0_CPU - @m42a_lib.m42A	8B5 8D7 9B8 48A5 48B3 64D6	
PPVDCIN_G3H_PRE	PPVDCIN_G3H_PRE - @m42a_lib.m42A	66D4	
PPVIN_S5_1V51V05S0_R	PPVIN_S5_1V51V05S0_R - @m42a_lib.m42A	62C5	
PPVIN_S5_5V3V3S5_R	PPVIN_S5_5V3V3S5_R - @m42a_lib.m42A	59C5	
PPVIN_S5_IMVP6_VIN	PPVIN_S5_IMVP6_VIN - @m42a_lib.m42A	58D7	
RSMRST_PWRGD	RSMRST_PWRGD - @m42a_lib.m42A	45D8 46D6 59A1	
	5V3V3S5_PGOOD - @m42a_lib.m42A	59A2	
S0PWRGD_0V9_DIV	S0PWRGD_0V9_DIV - @m42a_lib.m42A	63B2	
S0PWRGD_1V2_DIV	S0PWRGD_1V2_DIV - @m42a_lib.m42A	63A2	
S0PWRGD_OK	S0PWRGD_OK - @m42a_lib.m42A	63B2	
SATA_A_D2R_N	SATA_A_D2R_N - @m42a_lib.m42A	6C4 21B6	
	SATA_A_D2R_N_SPN - @m42a_lib.m42A	6C3	
SATA_A_D2R_P	SATA_A_D2R_P - @m42a_lib.m42A	6C4 21B6	
	SATA_A_D2R_P_SPN - @m42a_lib.m42A	6C3	
SATA_A_R2D_C_N	SATA_A_R2D_C_N - @m42a_lib.m42A	6C4 21B6	
	SATA_A_R2D_C_N_SPN - @m42a_lib.m42A	6C3	
SATA_A_R2D_C_P	SATA_A_R2D_C_P - @m42a_lib.m42A	6C4 21B6	
	SATA_A_R2D_C_P_SPN - @m42a_lib.m42A	6C3	
SATA_C_D2R_C_N	SATA_C_D2R_C_N - @m42a_lib.m42A	35D7	
SATA_C_D2R_C_P	SATA_C_D2R_C_P - @m42a_lib.m42A	35C7	
SATA_C_D2R_F_N	SATA_C_D2R_F_N - @m42a_lib.m42A	35D5	
SATA_C_D2R_F_P	SATA_C_D2R_F_P - @m42a_lib.m42A	35C5	
SATA_C_D2R_N	SATA_C_D2R_N - @m42a_lib.m42A	21B6 35D4	
SATA_C_D2R_P	SATA_C_D2R_P - @m42a_lib.m42A	21B6 35C4	
SATA_C_DET_L	SATA_C_DET_L - @m42a_lib.m42A	23D2 35D2	
SATA_C_PWR_EN_L	SATA_C_PWR_EN_L - @m42a_lib.m42A	23A3 23B3	
SATA_C_R2D_C_N	SATA_C_R2D_C_N - @m42a_lib.m42A	21B6 35D4	
SATA_C_R2D_C_P	SATA_C_R2D_C_P - @m42a_lib.m42A	21B6 35D4	
SATA_C_R2D_F_N	SATA_C_R2D_F_N - @m42a_lib.m42A	35D6	
SATA_C_R2D_F_P	SATA_C_R2D_F_P - @m42a_lib.m42A	35D6	
SATA_C_R2D_N	SATA_C_R2D_N - @m42a_lib.m42A	35D7	
SATA_C_R2D_P	SATA_C_R2D_P - @m42a_lib.m42A	35D7	
SATA_RBIAS_N	SATA_RBIAS_N - @m42a_lib.m42A	21B6 35D2	
	SATA_RBIAS_P - @m42a_lib.m42A	21B6 35D2	
	SATA_RBIAS_PN - @m42a_lib.m42A	35D3	
	SATA_RBIAS_P - @m42a_lib.m42A	21B6 35D2	
SB_A20GATE	SB_A20GATE - @m42a_lib.m42A	21C4	
SB_ACZ_BITCLK	SB_ACZ_BITCLK - @m42a_lib.m42A	21C6	
SB_ACZ_RST_L	SB_ACZ_RST_L - @m42a_lib.m42A	21C6	
SB_ACZ_SDATAOUT	SB_ACZ_SDATAOUT - @m42a_lib.m42A	21C6	
SB_ACZ_SYNC	SB_ACZ_SYNC - @m42a_lib.m42A	21C6	
SB_CLK14P3M_TIMER	SB_CLK14P3M_TIMER - @m42a_lib.m42A	23D3 33A6	
SB_CLK48M_USBCTLR	SB_CLK48M_USBCTLR - @m42a_lib.m42A	23D3 33C7	
SB_CLK100M_DMI_N	SB_CLK100M_DMI_N - @m42a_lib.m42A	22C2 33B2 33C3	
SB_CLK100M_DMI_P	SB_CLK100M_DMI_P - @m42a_lib.m42A	22C2 33B2 33C3	
SB_CLK100M_SATA_N	SB_CLK100M_SATA_N - @m42a_lib.m42A	21B6 33B2 33B3	
SB_CLK100M_SATA_OE_L	SB_CLK100M_SATA_OE_L - @m42a_lib.m42A	23C3 32B4	
SB_CLK100M_SATA_P	SB_CLK100M_SATA_P - @m42a_lib.m42A	21B6 33B2 33B3	
SB_GPIO2	SB_GPIO2 - @m42a_lib.m42A	22A6 26C3	
SB_GPIO3	SB_GPIO3 - @m42a_lib.m42A	22A6 23A4 26C3	
SB_GPIO4	SB_GPIO4 - @m42a_lib.m42A	22A6 26C3	
SB_GPIO5	SB_GPIO5 - @m42a_lib.m42A	22A6 26C3 34C8	
	ODD_PWR_EN_L - @m42a_lib.m42A	34C8	
SB_GPIO14	SB_GPIO14 - @m42a_lib.m42A	23A4 23C3	
SB_GPIO19	SB_GPIO19 - @m42a_lib.m42A	23D3	
SB_GPIO21	SB_GPIO21 - @m42a_lib.m42A	23D3	
SB_GPIO26	SB_GPIO26 - @m42a_lib.m42A	23C8	
SB_GPIO29	SB_GPIO29 - @m42a_lib.m42A	22C4 22D8	
SB_GPIO30	SB_GPIO30 - @m42a_lib.m42A	22C4 22D8 36D8	
SB_GPIO31	SB_GPIO31 - @m42a_lib.m42A	22C4 22D8	
SB_GPIO37	SB_GPIO37 - @m42a_lib.m42A	23D3	
SB_INTVRMEN	SB_INTVRMEN - @m42a_lib.m42A	21D6	
SB_RTC_RST_L	SB_RTC_RST_L - @m42a_lib.m42A	21D6 26D4	
SB_RTC_X1	SB_RTC_X1 - @m42a_lib.m42A	21D6 26C8	
SB_RTC_X1_R	SB_RTC_X1_R - @m42a_lib.m42A	26C7	
SB_RTC_X2	SB_RTC_X2 - @m42a_lib.m42A	21D6 26C8	
SB_RUNTIME_SCI_L	SB_RUNTIME_SCI_L - @m42a_lib.m42A	23C5	
SB_SM_INTRUDER_L	SB_SM_INTRUDER_L - @m42a_lib.m42A	21D6 26D4	
SB_SPKR	SB_SPKR - @m42a_lib.m42A	23C5	
SC_RX_L	SC_RX_L - @m42a_lib.m42A	45C5 46B1	
SC_TX_L	SC_TX_L - @m42a_lib.m42A	45C5 46B1	
SDATAIN	SDATAIN - @m42a_lib.m42A	54C6	
SDVO_CTRLCLK	SDVO_CTRLCLK - @m42a_lib.m42A	14B6 68A6	
SDVO_CTRLDATA	SDVO_CTRLDATA - @m42a_lib.m42A	14B6 68A6	
SMBUS_BATT_SCL_F	SMBUS_BATT_SCL_F - @m42a_lib.m42A	5D1 65B6	
SMBUS_BATT_SDA_F	SMBUS_BATT_SDA_F - @m42a_lib.m42A	5D1 65A6	
SMB_0_CLK	SMB_0_CLK - @m42a_lib.m42A	27D6 45C8	
	SMBUS_SMC_0_SCL - @m42a_lib.m42A	27D5	
	THRM_DIMM1_SMB_CLK - @m42a_lib.m42A	27D3 49B4	
	SMBUS_SMC_0_SCL - @m42a_lib.m42A	27D5	
SMB_0_DATA	SMB_0_DATA - @m42a_lib.m42A	27D6 45C5	
	SMBUS_SMC_0_SDA - @m42a_lib.m42A	27D5	
	THRM_DIMM1_SMB_DATA - @m42a_lib.m42A	27C3 49B4	
	SMBUS_SMC_0_SDA - @m42a_lib.m42A	27D5	
SMB_AIRPORT_CONN_CLK	SMB_AIRPORT_CONN_CLK - @m42a_lib.m42A	43B5	
SMB_AIRPORT_CONN_DAT A	SMB_AIRPORT_CONN_DATA - @m42a_lib.m42A	43B5	
SMB_ALERT_L	SMB_ALERT_L - @m42a_lib.m42A	23C5	
SMB_BSA_CLK	SMB_BSA_CLK - @m42a_lib.m42A	27C3 45B5	
	SMBUS_SMC_BSA_SCL - @m42a_lib.m42A	27C2	
	=SMBUS_BATT_SCL - @m42a_lib.m42A	27C1 65A2	
	SMBUS_SMC_BSA_SCL - @m42a_lib.m42A	27C2	
	=SMBUS_BATT_SCL - @m42a_lib.m42A	27C1 65A2	
SMB_BSB_CLK	SMB_BSB_CLK - @m42a_lib.m42A	27B3 45C5	
SMB_BSB_DATA	SMB_BSB_DATA - @m42a_lib.m42A	27B3 45C8	
SMB_LINK_ALERT_L	SMB_LINK_ALERT_L - @m42a_lib.m42A	23D5	
SMB_MLB_CLK	SMB_MLB_CLK - @m42a_lib.m42A	27C6 45B5	
	THRM_DIMM0_SMB_CLK - @m42a_lib.m42A	27B3 49C4	
	SMBUS_SMC_MLB_SCL - @m42a_lib.m42A	5B2 27C5	
	SMB_THRM_CLK - @m42a_lib.m42A	10B3 27C3	
	THRM_DIMM0_SMB_CLK - @m42a_lib.m42A	27B3 49C4	
	SMB_THRM_CLK - @m42a_lib.m42A	10B3 27C3	
	SMBUS_SMC_MLB_SCL - @m42a_lib.m42A	5B2 27C5	
SMB_MLB_DATA	SMB_MLB_DATA - @m42a_lib.m42A	27B6 45B5	
	THRM_DIMM0_SMB_DATA - @m42a_lib.m42A	27B3 49C4	
	SMBUS_SMC_MLB_SDA - @m42a_lib.m42A	5B2 27B5	
	SMB_THRM_DATA - @m42a_lib.m42A	10B3 27B3	
	THRM_DIMM0_SMB_DATA - @m42a_lib.m42A	27B3 49C4	
	SMB_THRM_DATA - @m42a_lib.m42A	10B3 27B3	
	SMBUS_SMC_MLB_SDA - @m42a_lib.m42A	5B2 27B5	
SMC_AVCC_RC	SMC_AVCC_RC - @m42a_lib.m42A	45D3	
SMC_BATT_CHG_EN	SMC_BATT_CHG_EN - @m42a_lib.m42A	5C1 45D8 46B6 66A4	
SMC_BATT_ISENSE	SMC_BATT_ISENSE - @m42a_lib.m42A	45D5 66B1	
SMC_BATT_ISET	SMC_BATT_ISET - @m42a_lib.m42A	5C1 45B5 66B7	
SMC_BATT_TRICKLE_EN_L	SMC_BATT_TRICKLE_EN_L - @m42a_lib.m42A	5C1 45D8 46B6 66A3	
SMC_BATT_VSET	SMC_BATT_VSET - @m42a_lib.m42A	45B5 46C3	
SMC_BC_ACOK	SMC_BC_ACOK - @m42a_lib.m42A	5C1 45C5 46B6 65C3 65C7 66A5	
SMC_BKLIGHT_ENABLE	SMC_BKLIGHT_ENABLE - @m42a_lib.m42A	45C8	
SMC_BS_ALRT_L	SMC_BS_ALRT_L - @m42a_lib.m42A	5D1 45C5 46C6 65A2	
SMC_BS_ALRT_L_F	SMC_BS_ALRT_L_F - @m42a_lib.m42A	65A6	
SMC_CASE_OPEN	SMC_CASE_OPEN - @m42a_lib.m42A	45C5 46B3	
SMC_CPU_ISENSE	SMC_CPU_ISENSE - @m42a_lib.m42A	45D5 48C1	
SMC_CPU_RESET_3_3_L	SMC_CPU_RESET_3_3_L - @m42a_lib.m42A	45B5 46C1	
SMC_CPU_VSENSE	SMC_CPU_VSENSE - @m42a_lib.m42A	5B2 45D5 48B1	
SMC_DCIN_ISENSE	SMC_DCIN_ISENSE - @m42a_lib.m42A	45D5 66C2	
SMC_DISPLAY_ENABLE	SMC_DISPLAY_ENABLE - @m42a_lib.m42A	45C8	
SMC_DISP_BKLT_A	SMC_DISP_BKLT_A - @m42a_lib.m42A	45B5	
SMC_DISP_BKLT_B	SMC_DISP_BKLT_B - @m42a_lib.m42A	45B5 46C3	
SMC_EXCARD_CP	SMC_EXCARD_CP - @m42a_lib.m42A	45B8 46C3	
SMC_EXCARD_PWR_EN	SMC_EXCARD_PWR_EN - @m42a_lib.m42A	45B8 46C3	
SMC_EXCARD_PWR_OC_L	SMC_EXCARD_PWR_OC_L - @m42a_lib.m42A	45B8 46D3	
SMC_EXTAL	SMC_EXTAL - @m42a_lib.m42A	45C4 46C7	
SMC_EXTSMI_L	SMC_EXTSMI_L - @m42a_lib.m42A	23B8 45B8	
SMC_FAN_0_CTL	SMC_FAN_0_CTL - @m42a_lib.m42A	45B8 46C3	
SMC_FAN_0_TACH	SMC_FAN_0_TACH - @m42a_lib.m42A	45B8 46C3	
SMC_FAN_1_CTL	SMC_FAN_1_CTL - @m42a_lib.m42A	5D2 45B8 51B4	
SMC_FAN_1_TACH	SMC_FAN_1_TACH - @m42a_lib.m42A	5D2 45B8 51C4	
SMC_FAN_2_CTL	SMC_FAN_2_CTL - @m42a_lib.m42A	45B8 46C3	
SMC_FAN_2_TACH	SMC_FAN_2_TACH - @m42a_lib.m42A	45B8 46C3	
SMC_FAN_3_CTL	SMC_FAN_3_CTL - @m42a_lib.m42A	45B8 46C3	
SMC_FAN_3_TACH	SMC_FAN_3_TACH - @m42a_lib.m42A	5A7 45B8 46C3	
SMC_FWE	SMC_FWE - @m42a_lib.m42A	45B5 46C6	
SMC_FWIRE_ISENSE	SMC_FWIRE_ISENSE - @m42a_lib.m42A	45D5 46B3	
SMC_GPU_ISENSE	SMC_GPU_ISENSE - @m42a_lib.m42A	45D5 46C6	
SMC_GPU_VSENSE	SMC_GPU_VSENSE - @m42a_lib.m42A	45D5 46C6	
SMC_LID	SMC_LID - @m42a_lib.m42A	5B2 40C4 45B5 46C6 65A8	
SMC_LID_F	SMC_LID_F - @m42a_lib.m42A	65A7	
SMC_LRESET_L	SMC_LRESET_L - @m42a_lib.m42A	26B1 45C8	
SMC_MANUAL_RST_L	SMC_MANUAL_RST_L - @m42a_lib.m42A	5B2 46D8	
SMC_MDI	SMC_MDI - @m42a_lib.m42A	5C2 45C2 47B6	
SMC_MEM_ISENSE	SMC_MEM_ISENSE - @m42a_lib.m42A	45A8 46B3 61C1	
SMC_NB_ISENSE	SMC_NB_ISENSE - @m42a_lib.m42A	45B8 46B3 62A5	
SMC_NMI	SMC_NMI - @m42a_lib.m42A	5C2 45C1 47B5	
SMC_ODD_DETECT	SMC_ODD_DETECT - @m42a_lib.m42A	34B3 45B8	
SMC_ONOFF_L	SMC_ONOFF_L - @m42a_lib.m42A	40C8 45C5 46C8 46D6 48C8	
	CONN_GEYSER_ONOFF_L - @m42a_lib.m42A	40C7	
SMC_P20	SMC_P20 - @m42a_lib.m42A	45D8 46C6	
SMC_P21	SMC_P21 - @m42a_lib.m42A	45D8 46C6	
SMC_P22	SMC_P22 - @m42a_lib.m42A	45D8 46C6	
SMC_P23	SMC_P23 - @m42a_lib.m42A	45D8 46C6	
SMC_P26	SMC_P26 - @m42a_lib.m42A	45D8 46C6	
SMC_P27	SMC_P27 - @m42a_lib.m42A	45D8 46C6	
SMC_P44	SMC_P44 - @m42a_lib.m42A	45C8 46C6	
SMC_P46	SMC_P46 - @m42a_lib.m42A	45C8 46C6	
SMC_PB7	SMC_PB7 - @m42a_lib.m42A	45B8 46C6	
SMC_PBUS_VSENSE	SMC_PBUS_VSENSE - @m42a_lib.m42A	45D5 48C5	
SMC_PD3	SMC_PD3 - @m42a_lib.m42A	45B8 46C3	
SMC_PG1	SMC_PG1 - @m42a_lib.m42A	45B5 46C6	
SMC_PM_G2_EN	SMC_PM_G2_EN - @m42a_lib.m42A	45D5 63C8	
SMC_PM_G2_EN_L	SMC_PM_G2_EN_L - @m42a_lib.m42A	63C7	
SMC_PROCHOT	SMC_PROCHOT - @m42a_lib.m42A	45B5 46B6	
SMC_PROCHOT_3_3_L	SMC_PROCHOT_3_3_L - @m42a_lib.m42A	45D5 46C1	
SMC_PS_ON	SMC_PS_ON - @m42a_lib.m42A	5C1 39C6 45D5 46B3 65C3	
SMC_RCIN_L	SMC_RCIN_L - @m42a_lib.m42A	21C3 45C8	
SMC_RSTGATE_L	SMC_RSTGATE_L - @m42a_lib.m42A	26A3 45D8	
SMC_RST_L	SMC_RST_L - @m42a_lib.m42A	5C2 45C3 46D7 47C5	
SMC_RUNTIME_SCI_L	SMC_RUNTIME_SCI_L - @m42a_lib.m42A	23C8 45B8	
SMC_RX_L	SMC_RX_L - @m42a_lib.m42A	5C2 45C8 46B2 46D6 47B5	
SMC_SB_NMI	SMC_SB_NMI - @m42a_lib.m42A	23C3 45D8	
SMC_SUS_CLK	SMC_SUS_CLK - @m42a_lib.m42A	45C5 46A6	
SMC_SUS_CLK_R	SMC_SUS_CLK_R - @m42a_lib.m42A	46A7	
SMC_SYS_ISET	SMC_SYS_ISET - @m42a_lib.m42A	45B5 66D7	
SMC_SYS_KBDLED	SMC_SYS_KBDLED - @m42a_lib.m42A	45C8 46C6	
SMC_SYS_LED_16B	SMC_SYS_LED_16B - @m42a_lib.m42A	45C8 46A4	
SMC_SYS_VSET	SMC_SYS_VSET - @m42a_lib.m42A	45B5 46C3	
SMC_TCK	SMC_TCK - @m42a_lib.m42A	5C2 45C5 46C6 47C5	
SMC_TDI	SMC_TDI - @m42a_lib.m42A	5C2 45C5 46C6 47C5	
SMC_TDO	SMC_TDO - @m42a_lib.m42A	5C2 45C5 46C6 47B6	
SMC_THRMTRIP	SMC_THRMTRIP - @m42a_lib.m42A	45B5 46B5	
SMC_TMS	SMC_TMS - @m42a_lib.m42A	5C2 45B5 46C6 47C6	
SMC_TPM_GPIO	SMC_TPM_GPIO - @m42a_lib.m42A	45D5 46B2	
SMC_TPM_PP	SMC_TPM_PP - @m42a_lib.m42A	45C8 53C7	
SMC_TPM_PP_R	SMC_TPM_PP_R - @m42a_lib.m42A	53C6	
SMC_TPM_RESET_L	SMC_TPM_RESET_L - @m42a_lib.m42A	45C8 46D6 53B7	
SMC_TRST_L	SMC_TRST_L - @m42a_lib.m42A	5C2 45C1 47C6	
SMC_TX_L	SMC_TX_L - @m42a_lib.m42A	5C2 45C8 46B2 46D6 47B6	
SMC_VCL	SMC_VCL - @m42a_lib.m42A	45D3	
SMC_WAKE_SCI_L	SMC_WAKE_SCI_L - @m42a_lib.m42A	23C1 45D5	
SMC_XTAL	SMC_XTAL - @m42a_lib.m42A	45C4 46C7	
SMLINK<0>	SMLINK<0> - @m42a_lib.m42A	23D5	
SMLINK<1>	SMLINK<1> - @m42a_lib.m42A	23D5	
SMS_ACC_SELFTEST	SMS_ACC_SELFTEST - @m42a_lib.m42A	52B6	
SMS_INT_L	SMS_INT_L - @m42a_lib.m42A	23C3 45B5 46D6	
SMS_ONOFF_L	SMS_ONOFF_L - @m42a_lib.m42A	45B5 52C7	
SMS_X_AXIS	SMS_X_AXIS - @m42a_lib.m42A	45B8 52C2	
SMS_Y_AXIS	SMS_Y_AXIS - @m42a_lib.m42A	45B8 52C2	

SMS_Z_AXIS

TP_NB_XOR_LVDS_D27	TP_NB_XOR_LVDS_D27 - @m42a_lib.M42A	14C6
TP_NB_XOR_LVDS_D28	TP_NB_XOR_LVDS_D28 - @m42a_lib.M42A	14C6
TP_PCI_GNT0_L	TP_PCI_GNT0_L - @m42a_lib.M42A	22B6
TP_PCI_GNT1_L	TP_PCI_GNT1_L - @m42a_lib.M42A	22B6
TP_PCI_GNT2_L	TP_PCI_GNT2_L - @m42a_lib.M42A	22B6
TP_PCI_PME_L	TP_PCI_PME_L - @m42a_lib.M42A	22A6
TP_SB_ACZ_SDIN1	TP_SB_ACZ_SDIN1 - @m42a_lib.M42A	21C6
TP_SB_ACZ_SDIN2	TP_SB_ACZ_SDIN2 - @m42a_lib.M42A	21C6
TP_SB_DRQ0_L	TP_SB_DRQ0_L - @m42a_lib.M42A	21D4
TP_SB_GPIO6	TP_SB_GPIO6 - @m42a_lib.M42A	23C5
TP_SB_GPIO22	TP_SB_GPIO22 - @m42a_lib.M42A	6B1 22B6
	=SB_GPIO22 - @m42a_lib.M42A	6B2 69A6
	SB_GPIO22 - @m42a_lib.M42A	6B2
	=SB_GPIO22 - @m42a_lib.M42A	6B2 69A6
TP_SB_GPIO23	TP_SB_GPIO23 - @m42a_lib.M42A	21D5
TP_SB_GPIO25_DO_NOT_	TP_SB_GPIO25_DO_NOT_USE -	23C3
USE	@m42a_lib.M42A	
TP_SB_GPIO38	TP_SB_GPIO38 - @m42a_lib.M42A	23C3
TP_SB_RCVENIN_L	TP_SB_RCVENIN_L - @m42a_lib.M42A	15B2
TP_SB_RSVD9	TP_SB_RSVD9 - @m42a_lib.M42A	22A6
TP_SB_SATALED_L	TP_SB_SATALED_L - @m42a_lib.M42A	21C6
TP_SB_XOR-AD5	TP_SB_XOR-AD5 - @m42a_lib.M42A	22A7
TP_SB_XOR-AD9	TP_SB_XOR-AD9 - @m42a_lib.M42A	22A7
TP_SB_XOR-AE5	TP_SB_XOR-AE5 - @m42a_lib.M42A	22A7
TP_SB_XOR-AG4	TP_SB_XOR-AG4 - @m42a_lib.M42A	22A7
TP_SB_XOR-AH4	TP_SB_XOR-AH4 - @m42a_lib.M42A	22A7
TP_SB_XOR-U3	TP_SB_XOR-U3 - @m42a_lib.M42A	21C6
TP_SB_XOR-U7	TP_SB_XOR-U7 - @m42a_lib.M42A	21C6
TP_SB_XOR-V6	TP_SB_XOR-V6 - @m42a_lib.M42A	21C6
TP_SB_XOR-V7	TP_SB_XOR-V7 - @m42a_lib.M42A	21C6
TP_SB_XOR-Y1	TP_SB_XOR-Y1 - @m42a_lib.M42A	21C6
TP_SB_XOR-Y2	TP_SB_XOR-Y2 - @m42a_lib.M42A	21C6
TP_SB_XOR_AE9	TP_SB_XOR_AE9 - @m42a_lib.M42A	22A6
TP_SB_XOR_AG8	TP_SB_XOR_AG8 - @m42a_lib.M42A	22A6
TP_SB_XOR_AH8	TP_SB_XOR_AH8 - @m42a_lib.M42A	22A6
TP_SB_XOR_W1	TP_SB_XOR_W1 - @m42a_lib.M42A	21C6
TP_USBN_F	TP_USBN_F - @m42a_lib.M42A	5C1
TP_USBP_F	TP_USBP_F - @m42a_lib.M42A	5C1
TV_DACA_OUT	TV_DACA_OUT - @m42a_lib.M42A	13C5 69B8
TV_DACB_OUT	TV_DACB_OUT - @m42a_lib.M42A	13C5 69A8
TV_DACC_OUT	TV_DACC_OUT - @m42a_lib.M42A	13C5 69A8
TV_IREF	TV_IREF - @m42a_lib.M42A	13C5 69C8
USB2_BT_F_N	USB2_BT_F_N - @m42a_lib.M42A	44C4
USB2_BT_F_P	USB2_BT_F_P - @m42a_lib.M42A	44B4
USB2_CAMERA_CONN_N	USB2_CAMERA_CONN_N - @m42a_lib.M42A	67A2
USB2_CAMERA_CONN_P	USB2_CAMERA_CONN_P - @m42a_lib.M42A	67B2
USB2_EXTA_F_N	USB2_EXTA_F_N - @m42a_lib.M42A	42C2
USB2_EXTA_F_P	USB2_EXTA_F_P - @m42a_lib.M42A	42C2
USB2_EXTB_F_N	USB2_EXTB_F_N - @m42a_lib.M42A	42B2
USB2_EXTB_F_P	USB2_EXTB_F_P - @m42a_lib.M42A	42B2
USB2_GND_EXTA_F	USB2_GND_EXTA_F - @m42a_lib.M42A	42C2
USB2_GND_EXTB_F	USB2_GND_EXTB_F - @m42a_lib.M42A	42B2
USB_A_N	USB_A_N - @m42a_lib.M42A	6C1 22C2
	=USB2_EXTA_N - @m42a_lib.M42A	6C2 42C5
	USB2_EXTA_N - @m42a_lib.M42A	6C2
	=USB2_EXTA_N - @m42a_lib.M42A	6C2 42C5
USB_A_OC_L	USB_A_OC_L - @m42a_lib.M42A	6C1 22C4 22D8
	=EXTAUSB_OC_L - @m42a_lib.M42A	6C2 42C8
	EXTAUSB_OC_L - @m42a_lib.M42A	6C2
	=EXTAUSB_OC_L - @m42a_lib.M42A	6C2 42C8
USB_A_P	USB_A_P - @m42a_lib.M42A	6C1 22C2
	=USB2_EXTA_P - @m42a_lib.M42A	6C2 42C5
	USB2_EXTA_P - @m42a_lib.M42A	6C2
	=USB2_EXTA_P - @m42a_lib.M42A	6C2 42C5
USB_B_N	USB_B_N - @m42a_lib.M42A	6C1 22C2
	=USB2_GEYSER_N - @m42a_lib.M42A	6C2 40C7
	USB2_GEYSER_N - @m42a_lib.M42A	6C2
	=USB2_GEYSER_N - @m42a_lib.M42A	6C2 40C7
USB_B_OC_L	USB_B_OC_L - @m42a_lib.M42A	22C4 22D8
USB_B_P	USB_B_P - @m42a_lib.M42A	6C1 22C2
	=USB2_GEYSER_P - @m42a_lib.M42A	6C2 40C7
	USB2_GEYSER_P - @m42a_lib.M42A	6C2
	=USB2_GEYSER_P - @m42a_lib.M42A	6C2 40C7
USB_C_N	USB_C_N - @m42a_lib.M42A	6C1 22C2
	=USB2_EXTB_N - @m42a_lib.M42A	6C2 42B5
	USB2_EXTB_N - @m42a_lib.M42A	6C2
	=USB2_EXTB_N - @m42a_lib.M42A	6C2 42B5
USB_C_P	USB_C_P - @m42a_lib.M42A	6C1 22C2
	=USB2_EXTB_P - @m42a_lib.M42A	6C2 42B5
	USB2_EXTB_P - @m42a_lib.M42A	6C2
	=USB2_EXTB_P - @m42a_lib.M42A	6C2 42B5
USB_D_OC_L	USB_D_OC_L - @m42a_lib.M42A	22C4 22D8
USB_E_N	USB_E_N - @m42a_lib.M42A	6C1 22C2
	TP_USBN_E - @m42a_lib.M42A	5C1 6C2
USB_E_OC_L	USB_E_OC_L - @m42a_lib.M42A	22C4 22D8
USB_E_P	USB_E_P - @m42a_lib.M42A	6C1 22C2
	TP_USBP_E - @m42a_lib.M42A	5C1 6C2
USB_F_N	USB_F_N - @m42a_lib.M42A	6C1 22C2
	=USB2_IR_N - @m42a_lib.M42A	6C2 41C6
	USB_IR_N - @m42a_lib.M42A	6C2
	=USB2_IR_N - @m42a_lib.M42A	6C2 41C6
USB_F_P	USB_F_P - @m42a_lib.M42A	6C1 22C2
	=USB2_IR_P - @m42a_lib.M42A	6C2 41C6
	USB_IR_P - @m42a_lib.M42A	6C2
	=USB2_IR_P - @m42a_lib.M42A	6C2 41C6
USB_G_N	USB_G_N - @m42a_lib.M42A	6B1 22C2
	=USB2_BT_N - @m42a_lib.M42A	6B2 44C6
	USB_BT_N - @m42a_lib.M42A	6B2
	=USB2_BT_N - @m42a_lib.M42A	6B2 44C6
USB_G_P	USB_G_P - @m42a_lib.M42A	6B1 22C2
	=USB2_BT_P - @m42a_lib.M42A	6C2 44C6
	USB_BT_P - @m42a_lib.M42A	6C2
	=USB2_BT_P - @m42a_lib.M42A	6C2 44C6
USB_RBIAS_PN	USB_RBIAS_PN - @m42a_lib.M42A	22C2
VGA_B	VGA_B - @m42a_lib.M42A	69B4
VGA_G	VGA_G - @m42a_lib.M42A	69B4
VGA_HSYNC	VGA_HSYNC - @m42a_lib.M42A	69B4 69C1
VGA_R	VGA_R - @m42a_lib.M42A	69A4
VGA_VSYNC	VGA_VSYNC - @m42a_lib.M42A	69B4 69C1
VOL_DOWN	VOL_DOWN - @m42a_lib.M42A	54B7 54C7
VOL_UP	VOL_UP - @m42a_lib.M42A	54B7 54C7
VREG_FB	VREG_FB - @m42a_lib.M42A	54A4
VR_PWRGD_CK410	VR_PWRGD_CK410 - @m42a_lib.M42A	23C5 26A8
VR_PWRGOOD_DELAY	VR_PWRGOOD_DELAY - @m42a_lib.M42A	14B6 26B5 58C7
XDP_BPM_L<0>	XDP_BPM_L<0> - @m42a_lib.M42A	7C6 11B2
XDP_BPM_L<1>	XDP_BPM_L<1> - @m42a_lib.M42A	7C6 11B2
XDP_BPM_L<2>	XDP_BPM_L<2> - @m42a_lib.M42A	7C6 11B2
XDP_BPM_L<3>	XDP_BPM_L<3> - @m42a_lib.M42A	7C6 11B3
XDP_BPM_L<4>	XDP_BPM_L<4> - @m42a_lib.M42A	7C6 11B2
XDP_BPM_L<5>	XDP_BPM_L<5> - @m42a_lib.M42A	7C6 11B2
XDP_DBRESET_L	XDP_DBRESET_L - @m42a_lib.M42A	7C6 11B4 26C6
XDP_TCK	XDP_TCK - @m42a_lib.M42A	7A8 7C6 11B2 11B3
XDP_TDI	XDP_TDI - @m42a_lib.M42A	7B8 7C6 11B3
XDP_TDO	XDP_TDO - @m42a_lib.M42A	7C6 11B5

XDP_TMS	XDP_TMS - @m42a_lib.M42A	7B8 7C6 11B2
XDP_TRST_L	XDP_TRST_L - @m42a_lib.M42A	7C6 11B3

WWW.AliSaler.Com

Title: Cref Part Report
Design: m42a
Date: Aug 5 16:01:17 2006

C0607	CAP_402	m42a[6C7]
C0608	CAP_402	m42a[6C7]
C0610	CAP_402	m42a[6C7]
C0611	CAP_402	m42a[6C7]
C0612	CAP_402	m42a[6A8]
C0613	CAP_402	m42a[6A8]
C0614	CAP_402	m42a[6B7]
C0615	CAP_402	m42a[6B7]
C0616	CAP_402	m42a[6B7]
C0617	CAP_402	m42a[6B7]
C0618	CAP_402	m42a[6A8]
C0619	CAP_402	m42a[6A7]
C0630	CAP_402	m42a[6C7]
C0900	CAP_805	m42a[9B5]
C0901	CAP_805	m42a[9B6]
C0902	CAP_805	m42a[9A5]
C0904	CAP_805	m42a[9A6]
C0907	CAP_805	m42a[9B4]
C0908	CAP_805	m42a[9B6]
C0909	CAP_805	m42a[9B5]
C0910	CAP_805	m42a[9B7]
C0911	CAP_805	m42a[9B7]
C0912	CAP_805	m42a[9A6]
C0913	CAP_805	m42a[9A7]
C0918	CAP_805	m42a[9A7]
C0920	CAP_805	m42a[9A4]
C0923	CAP_805	m42a[9B7]
C0924	CAP_805	m42a[9A7]
C0926	CAP_402	m42a[9B7]
C0928	CAP_805	m42a[9B5]
C0929	CAP_805	m42a[9B4]
C0930	CAP_805	m42a[9A5]
C0931	CAP_805	m42a[9A5]
C0934	CAP_402	m42a[9B7]
C0935	CAP_402	m42a[9B7]
C0936	CAP_402	m42a[9B6]
C0937	CAP_402	m42a[9B6]
C0938	CAP_402	m42a[9B5]
C0939	CAP_805	m42a[9A4]
C0940	CAP_P_3P_D2T	m42a[9B5]
C0941	CAP_P_3P_D2T	m42a[9A7]
C0942	CAP_P_3P_D2T	m42a[9A7]
C0943	CAP_P_3P_D2T	m42a[9A6]
C0944	CAP_P_3P_D2T	m42a[9A6]
C0946	CAP_P_3P_D2T	m42a[9A5]
C0950	CAP_402	m42a[9D7]
C0951	CAP_603	m42a[9D7]
C1001	CAP_402	m42a[10B5]
C1002	CAP_402	m42a[10C4]
C1100	CAP_402	m42a[11B3]
C1211	CAP_402	m42a[12C3]
C1226	CAP_402	m42a[12B6]
C1236	CAP_402	m42a[12A6]
C1415	CAP_402	m42a[14C3]
C1416	CAP_402	m42a[14C2]
C1610	CAP_402	m42a[16B5]
C1611	CAP_402	m42a[16B4]
C1612	CAP_402	m42a[16B4]
C1613	CAP_402	m42a[16B8]
C1614	CAP_402	m42a[16B8]
C1615	CAP_402	m42a[16B6]
C1620	CAP_603	m42a[16B5]
C1621	CAP_603	m42a[16B5]
C1711	CAP_402	m42a[17A3]
C1712	CAP_402	m42a[17A3]
C1713	CAP_402	m42a[17B3]
C1900	CAP_P_3P_D2T	m42a[19B8]
C1902	CAP_603	m42a[19B7]
C1903	CAP_603	m42a[19B7]
C1904	CAP_402	m42a[19B6]
C1905	CAP_402	m42a[19B6]
C1906	CAP_402	m42a[19B6]
C1907	CAP_402	m42a[19B5]
C1910	CAP_603	m42a[19B8]
C1911	CAP_402	m42a[19B7]
C1912	CAP_603	m42a[19B8]
C1913	CAP_402	m42a[19B7]
C1914	CAP_603	m42a[19B6]
C1915	CAP_402	m42a[19B6]
C1916	CAP_402	m42a[19B6]
C1917	CAP_402	m42a[19B5]
C1918	CAP_402	m42a[19B5]
C1920	CAP_402	m42a[19A6]
C1921	FILTER_3P_A_NFM18	m42a[19A6]
C1922	CAP_402	m42a[19A6]
C1923	FILTER_3P_A_NFM18	m42a[19A6]
C1934	CAP_805	m42a[19C5]
C1935	CAP_402	m42a[19C5]
C1936	CAP_805	m42a[19C5]
C1937	CAP_402	m42a[19C5]
C1940	CAP_402	m42a[19C4]
C1941	CAP_402	m42a[19C3]
C1942	CAP_402	m42a[19C3]
C1950	CAP_402	m42a[19D6]
C1951	CAP_402	m42a[19D5]
C1952	CAP_603	m42a[19D5]
C1953	CAP_402	m42a[19D4]
C1954	CAP_402	m42a[19C4]
C1965	CAP_603	m42a[19B4]
C1966	CAP_603	m42a[19B4]
C1967	CAP_402	m42a[19B4]
C1970	CAP_P_SMB2	m42a[19A4]
C1971	CAP_603	m42a[19A3]
C1972	CAP_603	m42a[19A3]
C1975	CAP_603	m42a[19A3]
C1976	CAP_402	m42a[19A3]
C1980	CAP_402	m42a[19D2]
C1981	CAP_402	m42a[19D2]
C1985	CAP_402	m42a[19C2]
C1986	FILTER_3P_A_NFM18	m42a[19D2]
C1990	CAP_603	m42a[19C2]
C1991	CAP_402	m42a[19C2]
C1992	FILTER_3P_A_NFM18	m42a[19C2]
C1993	CAP_402	m42a[19B2]
C1994	FILTER_3P_A_NFM18	m42a[19B2]
C1995	CAP_402	m42a[19B2]
C1996	FILTER_3P_A_NFM18	m42a[19B2]
C1997	CAP_402	m42a[19A2]
C1998	FILTER_3P_A_NFM18	m42a[19A2]

C2500	CAP_P_SMB2	m42a[25B8]
C2501	CAP_402	m42a[25A6]
C2502	CAP_402	m42a[25D4]
C2503	CAP_402	m42a[25D8]
C2504	CAP_402	m42a[25C8]
C2505	CAP_402	m42a[25B7]
C2506	CAP_402	m42a[25B7]
C2507	CAP_402	m42a[25B7]
C2508	CAP_603	m42a[25A6]
C2509	CAP_402	m42a[25B8]
C2510	CAP_402	m42a[25C1]
C2511	CAP_402	m42a[25D6]
C2512	CAP_402	m42a[25B1]
C2513	CAP_402	m42a[25C6]
C2514	CAP_402	m42a[25C6]
C2515	CAP_402	m42a[25B6]
C2516	CAP_P_CASE-C2	m42a[25D3]
C2517	CAP_402	m42a[25D6]
C2518	CAP_402	m42a[25D4]
C2519	CAP_402	m42a[25D3]
C2520	CAP_402	m42a[25B6]
C2521	CAP_402	m42a[25C3]
C2522	CAP_402	m42a[25B3]
C2523	CAP_402	m42a[25B4]
C2524	CAP_603	m42a[25B3]
C2525	CAP_402	m42a[25B3]
C2526	CAP_402	m42a[25A4]
C2527	CAP_402	m42a[25A3]
C2528	CAP_402	m42a[25A3]
C2529	CAP_402	m42a[25A3]
C2530	CAP_402	m42a[25A3]
C2531	CAP_402	m42a[25D1]
C2532	CAP_402	m42a[25C1]
C2533	CAP_402	m42a[25C1]
C2534	CAP_402	m42a[25D1]
C2605	CAP_402	m42a[26D4]
C2607	CAP_402	m42a[26B5]
C2608	CAP_402	m42a[26C7]
C2609	CAP_402	m42a[26C7]
C2610	CAP_402	m42a[26D4]
C2611	CAP_402	m42a[26B8]
C2680	CAP_402	m42a[26B3]
C2800	CAP_402	m42a[28D7]
C2809	CAP_603	m42a[28B2]
C2810	CAP_402	m42a[28B2]
C2811	CAP_402	m42a[28B2]
C2812	CAP_402	m42a[28B1]
C2813	CAP_402	m42a[28B1]
C2814	CAP_402	m42a[28B2]
C2815	CAP_402	m42a[28B2]
C2816	CAP_402	m42a[28B1]
C2817	CAP_402	m42a[28B1]
C2820	CAP_402	m42a[28D7]
C2821	CAP_402	m42a[28A7]
C2822	CAP_402	m42a[28A7]
C2830	CAP_402	m42a[28B2]
C2831	CAP_402	m42a[28B2]
C2832	CAP_402	m42a[28B1]
C2900	CAP_402	m42a[29D7]
C2909	CAP_603	m42a[29B2]
C2910	CAP_402	m42a[29B2]
C2911	CAP_402	m42a[29B2]
C2912	CAP_402	m42a[29B1]
C2913	CAP_402	m42a[29B1]
C2914	CAP_402	m42a[29B2]
C2915	CAP_402	m42a[29B2]
C2916	CAP_402	m42a[29B1]
C2917	CAP_402	m42a[29B1]
C2920	CAP_402	m42a[29D7]
C2921	CAP_402	m42a[29A7]
C2922	CAP_402	m42a[29A7]
C2930	CAP_402	m42a[29B2]
C2931	CAP_402	m42a[29B2]
C2932	CAP_402	m42a[29B1]
C3000	CAP_402	m42a[30D4]
C3001	CAP_402	m42a[30D3]
C3002	CAP_402	m42a[30D4]
C3003	CAP_402	m42a[30D3]
C3004	CAP_402	m42a[30D4]
C3005	CAP_402	m42a[30D3]
C3006	CAP_402	m42a[30C4]
C3007	CAP_402	m42a[30C3]
C3008	CAP_402	m42a[30C4]
C3009	CAP_402	m42a[30C3]
C3010	CAP_402	m42a[30C4]
C3011	CAP_402	m42a[30C3]
C3012	CAP_402	m42a[30B4]
C3013	CAP_402	m42a[30B3]
C3014	CAP_402	m42a[30B4]
C3015	CAP_402	m42a[30B3]
C3016	CAP_402	m42a[30B4]
C3017	CAP_402	m42a[30B3]
C3018	CAP_402	m42a[30B4]
C3019	CAP_402	m42a[30B3]
C3020	CAP_402	m42a[30A4]
C3021	CAP_402	m42a[30A3]
C3022	CAP_402	m42a[30A4]
C3023	CAP_402	m42a[30A3]
C3024	CAP_402	m42a[30A4]
C3025	CAP_402	m42a[30A3]
C3100	CAP_402	m42a[31C4]
C3101	CAP_603	m42a[31B5]
C3102	CAP_603	m42a[31B3]
C3103	CAP_402	m42a[31B5]
C3104	CAP_603	m42a[31C4]
C3105	CAP_P_SMC-LF	m42a[31B4]
C3301	CAP_402	m42a[32D6]
C3302	CAP_402	m42a[32D6]
C3303	CAP_402	m42a[32D6]
C3304	CAP_402	m42a[32D6]
C3305	CAP_402	m42a[32D4]
C3306	CAP_402	m42a[32D4]
C3307	CAP_402	m42a[32C4]
C3308	CAP_402	m42a[32D4]
C3309	CAP_603	m42a[32D4]
C3310	CAP_402	m42a[32D3]
C3311	CAP_402	m42a[32C6]
C3312	CAP_603	m42a[32C6]
C3314	CAP_402	m42a[32D8]
C3315	CAP_402	m42a[32D7]
C3316	CAP_603	m42a[32D7]
C3317	CAP_603	m42a[32D4]
C3389	CAP_402	m42a[32C7]
C3390	CAP_402	m42a[32C7]

C3804	CAP_402	m42a[34B5]
C3805	CAP_402	m42a[34B3]
C3806	CAP_603	m42a[34B3]
C3875	CAP_402	m42a[34C7]
C3876	CAP_402	m42a[34C5]
C3900	CAP_402	m42a[35D6]
C3901	CAP_402	m42a[35D5]
C3902	CAP_402	m42a[35C6]
C3903	CAP_402	m42a[35D5]
C3920	CAP_402	m42a[35C7]
C3921	CAP_603	m42a[35C6]
C3922	CAP_402	m42a[35C5]
C3923	CAP_402	m42a[35C6]
C3950	CAP_603	m42a[35B8]
C4100	CAP_402	m42a[36D6]
C4101	CAP_402	m42a[36D6]
C4102	CAP_402	m42a[36D5]
C4103	CAP_402	m42a[36D5]
C4104	CAP_402	m42a[36D5]
C4105	CAP_402	m42a[36D5]
C4106	CAP_402	m42a[36D4]
C4107	CAP_402	m42a[36D4]
C4110	CAP_402	m42a[36D5]
C4111	CAP_402	m42a[36D5]
C4112	CAP_402	m42a[36C5]
C4113	CAP_402	m42a[36C5]
C4115	CAP_402	m42a[36B4]
C4116	CAP_402	m42a[36B4]
C4117	CAP_402	m42a[36B3]
C4118	CAP_402	m42a[36B3]
C4126	CAP_402	m42a[36A8]
C4127	CAP_402	m42a[36A8]
C4128	CAP_402	m42a[36A7]
C4129	CAP_402	m42a[36A7]
C4130	CAP_402	m42a[36A7]
C4131	CAP_402	m42a[36A6]
C4132	CAP_402	m42a[36A6]
C4133	CAP_402	m42a[36A6]
C4134	CAP_402	m42a[36A6]
C4135	CAP_402	m42a[36A5]
C4136	CAP_402	m42a[36A5]
C4137	CAP_402	m42a[36A4]
C4138	CAP_402	m42a[36A4]
C4139	CAP_402	m42a[36A4]
C4140	CAP_402	m42a[36B3]
C4150	CAP_402	m42a[36B6]
C4151	CAP_402	m42a[36B6]
C4200	CAP_402	m42a[37C7]
C4201	CAP_402	m42a[37C6]
C4202	CAP_402	m42a[37C6]
C4203	CAP_402	m42a[37C6]
C4204	CAP_402	m42a[37C7]
C4205	CAP_402	m42a[37C6]
C4206	CAP_402	m42a[37C6]
C4207	CAP_402	m42a[37C6]
C4210	CAP_1808	m42a[37A6]
C4211	CAP_402	m42a[37A6]
C4212	CAP_402	m42a[37A5]
C4411	CAP_402	m42a[38C2]
C4412	CAP_402	m42a[38C2]
C4416	CAP_603	m42a[38D4]
C4417	CAP_402	m42a[38D4]
C4418	CAP_402	m42a[38D4]
C4420	CAP_402	m42a[38C3]
C4422	CAP_402	m42a[38D4]
C4424	CAP_603	m42a[38D5]
C4425	CAP_402	m42a[38D3]
C4426	CAP_402	m42a[38D4]
C4428	CAP_402	m42a[38D3]
C4429	CAP_402	m42a[38D3]
C4430	CAP_402	m42a[38D3]
C4432	CAP_402	m42a[38D3]
C4500	CAP_402	m42a[39B5]
C4501	CAP_402	m42a[39A5]
C4519	CAP_402	m42a[39C3]
C4520	CAP_402	m42a[39B4]
C4521	CAP_402	m42a[39B3]
C4522	CAP_402	m42a[39A4]
C4523	CAP_402	m42a[39A3]
C4524	CAP_603-1	m42a[39A2]
C4525	CAP_402	m42a[39A2]
C4551	CAP_402	m42a[39A7]
C4552	CAP_402	m42a[39A7]
C4590	CAP_402	m42a[39C5]
C4900	CAP_402	m42a[40C4]
C4910	CAP_402	m42a[40C6]
C5100	CAP_402	m42a[41D6]
C5101	CAP_402	m42a[41D6]
C5102	CAP_402	m42a[41B5]
C5202	CAP_402	m42a[42C2]
C5203	CAP_402	m42a[42C2]
C5206	CAP_402	m42a[42B2]
C5207	CAP_402	m42a[42B2]
C5208	CAP_402	m42a[42C6]
C5209	CAP_402	m42a[42B6]
C5210	CAP_P_B2	m42a[42C6]
C5211	CAP_P_B2	m42a[42B6]
C5212	CAP_402	m42a[42C8]
C5213	CAP_603	m42a[42C8]
C5250	CAP_402	m42a[42C8]
C5251	CAP_402	m42a[42B8]
C5300	CAP_402	m42a[43B6]
C5301	CAP_402	m42a[43B6]
C5304	CAP_402	m42a[43D4]
C5305	CAP_402	m42a[43D4]
C5306	CAP_402	m42a[43D4]
C5307	CAP_402	m42a[43C4]
C5308	CAP_402	m42a[43C4]
C5309	CAP_603	m42a[43C3]
C5310	CAP_402	m42a[43C3]
C5498	CAP_402	m42a[44C5]
C5499	CAP_603	m42a[44C5]
C5802	CAP_805	m42a[45D3]
C5803	CAP_402	m42a[45D2]
C5804	CAP_402	m42a[45D2]
C5805	CAP_402	m42a[45D2]
C5806	CAP_402	m42a[45D1]
C5807	CAP_402	m42a[45D2]
C5820	CAP_402	m42a[45C3]
C5900	CAP_402	m42a[46D8]
C5901	CAP_402	m42a[46D8]
C5910	CAP_603	m42a[46A7]
C5911	CAP_402	m42a[46A7]
C5920	CAP_402	m42a[46C6]

C5921	CAP_402	m42a[46C6]
C5951	CAP_402	m42a[46A4]
C5965	CAP_402	m42a[46B8]
C5966	CAP_603	m42a[46B7]
C5967	CAP_402	m42a[46B7]
C5977	CAP_402	m42a[46C2]
C6100	CAP_402	m42a[48D3]
C6101	CAP_402	m42a[48C3]
C6102	CAP_402	m42a[48C2]
C6103	CAP_402	m42a[48C3]
C6104	CAP_402	m42a[48D4]
C6105	CAP_402	m42a[48C4]
C6112	CAP_402	m42a[48B2]
C6150	CAP_402	m42a[48C6]
C6200	CAP_402	m42a[49C5]
C6201	CAP_402	m42a[49C5]
C6202	CAP_402	m42a[49D4]
C6250	CAP_402	m42a[49B5]
C6251	CAP_402	m42a[49A5]
C6252	CAP_402	m42a[49B4]
C6301	CAP_402	m42a[50C2]
C6308	CAP_402	m42a[50C5]
C6309	CAP_402	m42a[50C6]
C6311	CAP_402	m42a[50C2]
C6312	CAP_402	m42a[50D3]
C6604	CAP_402	m42a[52B4]
C6605	CAP_402	m42a[52B4]
C6606	CAP_402	m42a[52B4]
C6620	CAP_402	m42a[52C4]
C6700	CAP_402	m42a[53C4]
C6701	CAP_402	m42a[53C4]
C6702	CAP_402	m42a[53C3]
C6703	CAP_402	m42a[53C3]
C6795	CAP_402	m42a[53C6]
C6796	CAP_402	m42a[53B6]
C6800	CAP_603	m42a[54D6]
C6801	CAP_402	m42a[54D6]
C6802	CAP_P_CASE-B3-LF	m42a[54D4]
C6803	CAP_P_CASE-B3-LF	m42a[54D3]
C6804	CAP_P_SMA-LF	m42a[54B4]
C6805	CAP_603	m42a[54B4]
C6806	CAP_603	m42a[54B3]
C6807	CAP_P_SMA-LF	m42a[54B3]
C6810	CAP_P_SMA-LF	m42a[54B2]
C6812	CAP_402	m42a[54B4]
C6813	CAP_402	m42a[54B3]
C6821	CAP_402	m42a[54C6]
C6822	CAP_603	m42a[54A5]
C6823	CAP_402	m42a[54A5]
C6825	CAP_402	m42a[54A4]
C6830	CAP_402	m42a[54D4]
C6833	CAP_402	m42a[54B2]
C6835	CAP_402	m42a[54D6]
C6836	CAP_402	m42a[54D3]
C6853	CAP_402	m42a[54B4]
C7200	CAP_P_SMC-LF	m42a[55D6]
C7201	CAP_P_CASE-B3-LF	m42a[55C4]
C7202	CAP_603	m42a[55C4]
C7203	CAP_P_CASE-B3-LF	m42a[55B4]
C7204	CAP_603	m42a[55B4]
C7205	CAP_P_CASE-B2	m42a[55B4]
C7206	CAP_603	m42a[55B4]
C7207	CAP_402	m42a[55C5]
C7208	CAP_402	m42a[55B5]
C7209	CAP_402	m42a[55A5]
C7210	CAP_402	m42a[55C6]
C7211	CAP_402	m42a[55C5]
C7220	CAP_402	m42a[55B6]
C7221	CAP_402	m42a[55B5]
C7230	CAP_402	m42a[55A6]
C7231	CAP_402	m42a[55A5]
C7260	CAP_402	m42a[55D2]
C7261	CAP_402	m42a[55C2]
C7270	CAP_402	m42a[55C2]
C7271	CAP_402	m42a[55B2]
C7280	CAP_402	m42a[55B2]
C7281	CAP_402	m42a[55B2]
C7300	CAP_402	m42a[56C7]
C7301	CAP_402	m42a[56C5]
C7302	CAP_402	m42a[56C5]
C7303	CAP_402	m42a[56C5]
C7304	CAP_402	m42a[56C5]
C7305	CAP_402	m42a[56C5]
C7306	CAP_402	m42a[56C8]
C7307	CAP_402	m42a[56C6]
C7308	CAP_402	m42a[56C6]
C7350	CAP_402	m42a[56A7]
C7351	CAP_603	m42a[56A7]
C7352	CAP_402	m42a[56A5]
C7353	CAP_402	m42a[56A5]
C7354	CAP_402	m42a[56A5]
C7355	CAP_402	m42a[56A5]
C7356	CAP_402	m42a[56A5]
C7357	CAP_402	m42a[56A8]
C7370	CAP_402	m42a[56A2]
C7371	CAP_402	m42a[56A2]
C7372	CAP_402	m42a[56A1]
C7400	CAP_402	m42a[57B4]
C7401	CAP_402	m42a[57D7]
C7402	CAP_402	m42a[57C7]
C7404	CAP_402	m42a[57C4]
C7411	CAP_402	m42a[57B7]
C7412	CAP_402	m42a[57B6]
C7414	CAP_402	m42a[57C4]
C7430	CAP_P_B2	m42a[57D2]
C7431	CAP_P_B2	m42a[57C2]
C7432	CAP_805-1	m42a[57B2]
C7433	CAP_805-1	m42a[57A2]
C7435	CAP_402	m42a[57B1]
C7440	CAP_402	m42a[57A4]
C7441	CAP_402	m42a[57A4]
C7445	CAP_402	m42a[57A3]
C7446	CAP_402	m42a[57A3]
C7447	CAP_402	m42a[57A3]
C7450	CAP_402	m42a[57A6]
C7451	CAP_402	m42a[57A7]
C7452	CAP_402	m42a[57A6]
C7500	CAP_402	m42a[58C4]
C7501	CAP_P_CASED2E-SM	m42a[58C3]
C7502	CAP_402	m42a[58B4]
C7503	CAP_402	m42a[58C2]
C7504	CAP_402	m42a[58B2]
C7505	CAP_402	m42a[58C8]
C7506	CAP_402	m42a[58B8]

WWW.AliSaler.Com

C7507	CAP_402	m42a[58B7]
C7508	CAP_P_CASED2E-SM	m42a[58C3]
C7509	CAP_P_CASED2E-SM	m42a[58D3]
C7510	CAP_402	m42a[58C8]
C7511	CAP_402	m42a[58B3]
C7512	CAP_402	m42a[58C3]
C7513	CAP_402	m42a[58B7]
C7514	CAP_402	m42a[58B8]
C7515	CAP_402	m42a[58C5]
C7516	CAP_402	m42a[58B4]
C7517	CAP_P_CASED2E-SM	m42a[58D3]
C7518	CAP_603	m42a[58D2]
C7521	CAP_402	m42a[58A6]
C7526	CAP_603	m42a[58D7]
C7527	CAP_402	m42a[58C5]
C7528	CAP_402	m42a[58B5]
C7529	CAP_402	m42a[58B5]
C7530	CAP_402	m42a[58C7]
C7531	CAP_402	m42a[58B5]
C7532	CAP_402	m42a[58B6]
C7533	CAP_402	m42a[58B6]
C7534	CAP_402	m42a[58B5]
C7535	CAP_603	m42a[58B6]
C7590	CAP_402	m42a[58C3]
C7592	CAP_402	m42a[58B3]
C7596	CAP_402	m42a[58D7]
C7599	CAP_603	m42a[58C2]
C7600	CAP_603	m42a[59C4]
C7601	CAP_603	m42a[59A4]
C7602	CAP_402	m42a[59A4]
C7604	CAP_402	m42a[59A2]
C7605	CAP_402	m42a[59A5]
C7607	CAP_402	m42a[59A3]
C7608	CAP_402	m42a[59D2]
C7609	CAP_402	m42a[59D7]
C7621	CAP_402	m42a[59B6]
C7622	CAP_402	m42a[59C5]
C7624	CAP_402	m42a[59C6]
C7625	CAP_402	m42a[59B6]
C7626	CAP_402	m42a[59B6]
C7628	CAP_402	m42a[59B7]
C7629	CAP_402	m42a[59B7]
C7630	CAP_402	m42a[59B5]
C7631	CAP_402	m42a[59C7]
C7632	CAP_402	m42a[59C2]
C7640	CAP_P_CASED2E-SM	m42a[59D6]
C7641	CAP_603	m42a[59D6]
C7650	CAP_805	m42a[59B7]
C7651	CAP_805	m42a[59B8]
C7652	CAP_P_SMC-LF	m42a[59B8]
C7661	CAP_402	m42a[59B3]
C7662	CAP_402	m42a[59C4]
C7664	CAP_402	m42a[59C3]
C7665	CAP_402	m42a[59B4]
C7666	CAP_402	m42a[59B3]
C7668	CAP_402	m42a[59B2]
C7669	CAP_402	m42a[59B2]
C7670	CAP_402	m42a[59B4]
C7680	CAP_P_CASED2E-SM	m42a[59D3]
C7681	CAP_603	m42a[59D4]
C7689	CAP_402	m42a[59B4]
C7690	CAP_805	m42a[59B2]
C7691	CAP_805	m42a[59B1]
C7692	CAP_P_SMC-LF	m42a[59B1]
C7700	CAP_603	m42a[60C4]
C7701	CAP_402	m42a[60C3]
C7702	CAP_603	m42a[60C3]
C7703	CAP_603	m42a[60C4]
C7704	CAP_402	m42a[60C3]
C7705	CAP_603	m42a[60C3]
C7720	CAP_402	m42a[60B4]
C7721	CAP_603	m42a[60B3]
C7750	CAP_402	m42a[60C6]
C7800	CAP_603	m42a[61C5]
C7801	CAP_603	m42a[61C6]
C7802	CAP_603	m42a[61C5]
C7803	CAP_402	m42a[61B2]
C7804	CAP_402	m42a[61C2]
C7805	CAP_402	m42a[61C2]
C7806	CAP_402	m42a[61B7]
C7807	CAP_402	m42a[61B6]
C7808	CAP_402	m42a[61B6]
C7809	CAP_402	m42a[61C4]
C7810	CAP_402	m42a[61B4]
C7830	CAP_P_CASED2E-SM	m42a[61C4]
C7831	CAP_603	m42a[61C4]
C7840	CAP_805	m42a[61B3]
C7841	CAP_805	m42a[61B3]
C7842	CAP_P_CASE-D2E-LF	m42a[61B3]
C7843	CAP_P_CASE-D2E-LF	m42a[61B2]
C7864	CAP_402	m42a[61C2]
C7900	CAP_603	m42a[62C4]
C7901	CAP_603	m42a[62A4]
C7902	CAP_402	m42a[62A4]
C7903	CAP_402	m42a[62A6]
C7904	CAP_402	m42a[62A2]
C7905	CAP_402	m42a[62A5]
C7906	CAP_402	m42a[62A6]
C7907	CAP_402	m42a[62A3]
C7908	CAP_402	m42a[62D2]
C7909	CAP_402	m42a[62C7]
C7921	CAP_402	m42a[62B6]
C7922	CAP_402	m42a[62C5]
C7924	CAP_402	m42a[62C6]
C7925	CAP_402	m42a[62B6]
C7926	CAP_402	m42a[62B6]
C7928	CAP_402	m42a[62B7]
C7929	CAP_402	m42a[62B7]
C7930	CAP_402	m42a[62B5]
C7931	CAP_402	m42a[62C7]
C7932	CAP_402	m42a[62C2]
C7940	CAP_P_CASED2E-SM	m42a[62C6]
C7941	CAP_603	m42a[62C6]
C7950	CAP_805	m42a[62B8]
C7952	CAP_P_CASE-D2E-LF	m42a[62B8]
C7961	CAP_402	m42a[62B3]
C7962	CAP_402	m42a[62C4]
C7964	CAP_402	m42a[62C3]
C7965	CAP_402	m42a[62B3]
C7966	CAP_402	m42a[62B3]
C7968	CAP_402	m42a[62B2]
C7969	CAP_402	m42a[62B2]
C7970	CAP_402	m42a[62B4]
C7980	CAP_P_CASED2E-SM	m42a[62C4]

C7981	CAP_603	m42a[62C4]
C7989	CAP_402	m42a[62B4]
C7990	CAP_805	m42a[62A7]
C7991	CAP_805	m42a[62A7]
C7992	CAP_P_CASE-D2E-LF	m42a[62B1]
C7999	CAP_402	m42a[62A6]
C8000	CAP_402	m42a[63D4]
C8005	CAP_402	m42a[63C4]
C8010	CAP_402	m42a[63C4]
C8015	CAP_402	m42a[63B4]
C8025	CAP_402	m42a[63A4]
C8060	CAP_402	m42a[63B3]
C8061	CAP_402	m42a[63B2]
C8062	CAP_402	m42a[63B2]
C8090	CAP_1206-1	m42a[63C3]
C8091	CAP_402	m42a[63D2]
C8092	CAP_402	m42a[63D1]
C8093	CAP_805	m42a[63D1]
C8202	CAP_402	m42a[65D7]
C8203	CAP_402	m42a[65C7]
C8205	CAP_402	m42a[65A5]
C8206	CAP_402	m42a[65A4]
C8209	CAP_402	m42a[65A5]
C8211	CAP_402	m42a[65A5]
C8215	CAP_402	m42a[65A4]
C8217	CAP_603	m42a[65C2]
C8218	CAP_402	m42a[65C4]
C8220	CAP_402	m42a[65A7]
C8221	CAP_402	m42a[65A7]
C8230	CAP_402	m42a[65C6]
C8300	CAP_402	m42a[66C7]
C8301	CAP_402	m42a[66C7]
C8302	CAP_402	m42a[66C7]
C8303	CAP_402	m42a[66C4]
C8304	CAP_402	m42a[66C5]
C8305	CAP_1206-1	m42a[66C4]
C8306	CAP_1206-1	m42a[66C3]
C8307	CAP_1206-1	m42a[66C3]
C8308	CAP_P_CASED2E-SM	m42a[66B4]
C8309	CAP_P_6.3X5.5SM1	m42a[66B3]
C8310	CAP_P_CASED2E-SM	m42a[66B3]
C8311	CAP_402	m42a[66C7]
C8312	CAP_402	m42a[66C5]
C8313	CAP_402	m42a[66C6]
C8316	CAP_402	m42a[66B4]
C8317	CAP_402	m42a[66B5]
C8318	CAP_402	m42a[66B4]
C8320	CAP_402	m42a[66B5]
C8321	CAP_402	m42a[66B5]
C8322	CAP_402	m42a[66B4]
C8323	CAP_402	m42a[66A5]
C8324	CAP_402	m42a[66A4]
C8325	CAP_402	m42a[66C7]
C8326	CAP_402	m42a[66C7]
C8327	CAP_402	m42a[66D7]
C8328	CAP_402	m42a[66B6]
C8340	CAP_402	m42a[66C7]
C8341	CAP_402	m42a[66B8]
C8370	CAP_402	m42a[66C3]
C8371	CAP_402	m42a[66C2]
C8372	CAP_402	m42a[66B1]
C8375	CAP_402	m42a[66B3]
C8381	CAP_603	m42a[66B3]
C9400	CAP_402	m42a[67C3]
C9401	CAP_402	m42a[67C3]
C9402	CAP_402	m42a[67C3]
C9403	CAP_402	m42a[67C3]
C9408	CAP_402	m42a[67A3]
C9409	CAP_402	m42a[67B2]
C9410	CAP_402	m42a[67A3]
C9411	CAP_402	m42a[67B5]
C9412	CAP_603	m42a[67B5]
C9413	CAP_402	m42a[67B6]
C9414	CAP_402	m42a[67D5]
C9415	CAP_402	m42a[67A3]
C9416	CAP_402	m42a[67A4]
C9459	CAP_402	m42a[67C5]
C9500	CAP_402	m42a[68D5]
C9501	CAP_402	m42a[68D4]
C9502	CAP_402	m42a[68D4]
C9503	CAP_402	m42a[68D4]
C9504	CAP_603	m42a[68D4]
C9505	CAP_603	m42a[68B2]
C9506	CAP_402	m42a[68C7]
C9507	CAP_402	m42a[68D5]
C9508	CAP_402	m42a[68D5]
C9509	CAP_402	m42a[68D4]
C9510	CAP_402	m42a[68D4]
C9511	CAP_402	m42a[68D4]
C9512	CAP_402	m42a[68D3]
C9513	CAP_603	m42a[68D3]
C9514	CAP_402	m42a[68D7]
C9519	CAP_402	m42a[68B6]
C9520	CAP_402	m42a[68B6]
C9521	CAP_402	m42a[68B3]
C9522	CAP_402	m42a[68D2]
C9523	CAP_402	m42a[68D2]
C9524	CAP_402	m42a[68C2]
C9525	CAP_402	m42a[68C2]
C9526	CAP_402	m42a[68C3]
C9527	CAP_402	m42a[68C1]
C9530	CAP_402	m42a[68D7]
C9531	CAP_402	m42a[68D7]
C9532	CAP_402	m42a[68C7]
C9533	CAP_402	m42a[68C7]
C9534	CAP_402	m42a[68C7]
C9535	CAP_402	m42a[68C7]
C9536	CAP_402	m42a[68D7]
C9537	CAP_402	m42a[68D7]
C9538	CAP_402	m42a[68D7]
C9539	CAP_402	m42a[68D7]
C9540	CAP_603	m42a[68D6]
C9541	CAP_402	m42a[68B5]
C9542	CAP_402	m42a[68B5]
C9543	CAP_402	m42a[68B5]
C9544	CAP_402	m42a[68B5]
C9545	CAP_402	m42a[68B5]
C9546	CAP_402	m42a[68B4]
C9547	CAP_402	m42a[68B4]
C9548	CAP_402	m42a[68B4]
C9804	CAP_402	m42a[69C4]
C9808	CAP_402	m42a[69C5]
C9809	CAP_402	m42a[69B5]
C9812	CAP_402	m42a[69B5]

C9820	CAP_402	m42a[69A4]
C9821	CAP_402	m42a[69A3]
C9824	CAP_402	m42a[69B5]
C9834	CAP_402	m42a[69A4]
C9839	CAP_402	m42a[69B7]
C9842	CAP_402	m42a[69C1]
C9843	CAP_402	m42a[69C1]
C9860	CAP_402	m42a[69C2]
D1986	DIODE_SCHOT_6PB_SOT-363	m42a[19C2 19D2]
D2502	DIODE_SCHOT_6PB_SOT-363	m42a[25C8 25D8]
D2600	DIODE_SCHOT_6PB_SOT-363	m42a[26D5 26D5]
D4520	DIODE_DUAL_6P_SOT-363	m42a[39B4 39B3]
D4521	DIODE_DUAL_6P_SOT-363	m42a[39A4 39A3]
D4550	ZENER_SOT23	m42a[39A6]
D4590	DIODE_SCHOT_SMB	m42a[39D4]
D4591	DPAK3P_SOT-363	m42a[39C5 39C5 39C5]
D4900	DIODE_SCHOT_3P_A_SC-75	m42a[40C6]
D5200	DIODE_SCHOT_3P_A_SC-75	m42a[42C3]
D5201	DIODE_SCHOT_3P_A_SC-75	m42a[42A3]
D7500	DIODE_SCHOT_SMB	m42a[58C3]
D7501	DIODE_SCHOT_SMB	m42a[58B3]
D7624	DIODE_SCHOT_SOD-323	m42a[59C6]
D7664	DIODE_SCHOT_SOD-323	m42a[59C3]
D7820	DIODE_SCHOT_SMB	m42a[61B4]
D7921	DIODE_SMB	m42a[62B7]
D7924	DIODE_SCHOT_SOD-323	m42a[62C6]
D7961	DIODE_SMB	m42a[62B2]
D7964	DIODE_SCHOT_SOD-323	m42a[62C3]
D8200	DIODE_SCHOT_3P_A_SC-75	m42a[65C7]
D8201	DPAK3P_SOT-363	m42a[65D4]
D8201	DPAK3P_SOT-363	m42a[66B3]
D8300	DIODE_SCHOT_SOD-123	m42a[66C5]
D8322	DPAK3P_SOT-363	m42a[66C8 66A5 66A6]
D9500	DIODE_DUAL_6P_SOT-363	m42a[68A7 68B7]
DZ7300	SUPPR_TRANSIENT_4P1_0405	m42a[56C6]
DZ7301	SUPPR_TRANSIENT_4P1_0405	m42a[56C6]
DZ7350	SUPPR_TRANSIENT_4P1_0405	m42a[56A6]
DZ7351	SUPPR_TRANSIENT_4P1_0405	m42a[56A6]
F8200	FUSE_1206	m42a[65D6]
F8300	FUSE_1206	m42a[66C3]
F9804	FUSE_SM-LF	m42a[69C5]
FL4520	FILTER_4P_2012	m42a[39B3]
FL4521	FILTER_4P_2012	m42a[39B3]
FL4590	FUSE_MINISMDC	m42a[39D5]
FL9800	FILTER_LC_SM-220MHZ-LF	m42a[69B5]
FL9801	FILTER_LC_SM-220MHZ-LF	m42a[69A5]
FL9802	FILTER_LC_SM-220MHZ-LF	m42a[69A5]
GV3901	HOLE_VIA	m42a[35C2]
GV3902	HOLE_VIA	m42a[35C2]
GV3903	HOLE_VIA	m42a[35C2]
GV3904	HOLE_VIA	m42a[35C2]
GV3905	HOLE_VIA	m42a[35B2]
GV3906	HOLE_VIA	m42a[35B2]
GV3907	HOLE_VIA	m42a[35B2]
GV3908	HOLE_VIA	m42a[35B2]
J1102	CON_F30STSM_5047_SM1	m42a[11B2]
J2600	CON_F2RT_S2MT_SM_F-RT-SM	m42a[26D6]
J2801	CON_F200RT_DDR2DIMM_TH1_F-RT-TH2	m42a[28D6]
J2901	CON_F200RT_DDR2DIMM_TH1_F-RT-TH2	m42a[29D5]
J3801	CON_M50ST_D2MT_SM_M-ST-SM	m42a[34C4]
J3901	CON_F19ST_S2MT_SM_F-ST-SM	m42a[35D8]
J4200	CON_RJ45_8RT_S2MT_SM_F-RT-SM	m42a[37C2]
J4500	CON_F6RT_S2MT_TH_F-RT-TH1	m42a[39B2]
J4900	CON_F10ST_D_SMA_F-ST-SM	m42a[40C4]
J5200	CON_F4RT_USB_S2MT_TH_F-RT-TH-M42	m42a[42D1]
J5201	CON_F4RT_USB_S2MT_TH_F-RT-TH-M42	m42a[42B1]
J5300	CON_F52RT_D2MT_SM_F-ST-SM	m42a[43C5]
J5400	CON_F4ST_S2MT_SM_F-S-T-SM	m42a[44C4]
J6000	CON_F30STSM_5047_SM1	m42a[47C6]
J6250	CON_F2ST_S2MT_SM_F-S-T-SM	m42a[49C6]
J6251	CON_F2ST_S2MT_SM_F-S-T-SM	m42a[49A6]
J6501	CON_F4ST_S2MT_SM_F-S-T-SM	m42a[51C3]
J7300	CON_F8RT_2MT_AUDIOUT_TH_F-RT-TH	m42a[56C8]
J7301	CON_M3RT_S2MT_SM_M-RT-SM1	m42a[56D1]
J7302	CON_F2ST_S2MT_SM_F-S-T-SM	m42a[56D1]
J7303	CON_F4ST_S2MT_SM_F-S-T-SM	m42a[56C1]
J7350	CON_F8RT_2MT_AUDIOIN_TH_F-RT-TH	m42a[56B8]
J8200	CON_M5RT_S_SM_M-RT-SM	m42a[65D7]
J8250	CON_F20ST_D_SM_F-ST-SM1	m42a[65B6]
J9400	CON_F4ST_S2MT_SM_F-S-T-SM	m42a[67D2]
J9401	CON_F22RT_S4MT_SM_F-RT-SM	m42a[67B1]
J9801	CON_DVI_30RT_Q4MT_TH_1_RT-TH	m42a[69B4]

L1922	IND_0603	m42a[19A7]
L1934	IND_0603	m42a[19C5]
L1936	IND_0603	m42a[19C5]
L1970	IND_1210	m42a[19B4]
L1975	IND_0805	m42a[19A4]
L1985	IND_0603	m42a[19D3]
L1990	IND_0603	m42a[19C3]
L2500	IND_SM-3	m42a[25B8]
L2507	IND_1206	m42a[25A7]
L3301	IND_0402-LF	m42a[32D7]
L3302	IND_0402-LF	m42a[32D3]
L3901	FILTER_4P_2012H	m42a[35D6]
L3902	FILTER_4P_2012H	m42a[35D5]
L3912	IND_0402	m42a[35C6]
L4100	IND_0402-LF	m42a[36D3]
L4250	IND_0402-LF	m42a[37D7]
L4400	IND_0402	m42a[38D4]
L4510	IND_SM	m42a[39C3]
L4550	IND_SM-1	m42a[39A7]
L4900	IND_0402	m42a[40D5]
L4901	FILTER_4P_SM	m42a[40C6]
L4902	IND_0402	m42a[40C5]
L5200	FILTER_4P_SM	m42a[42C4]
L5201	FILTER_4P_SM	m42a[42B4]
L5202	IND_0402-LF	m42a[42D4]
L5203	IND_0402-LF	m42a[42C4]
L5204	IND_0402-LF	m42a[42C3]
L5205	IND_0402-LF	m42a[42A3]
L5400	FILTER_4P_SM	m42a[44B5]
L5410	IND_0402-LF	m42a[44C5]
L5411	IND_0402-LF	m42a[44B5]
L5910	IND_0603	m42a[46A7]
L6800	IND_0402	m42a[54A5]
L6801	IND_0402	m42a[54D6]
L7200	IND_0402	m42a[55C7]
L7210	IND_0402	m42a[55C7]
L7211	IND_0402	m42a[55A7]
L7220	IND_0402	m42a[55B7]
L7230	IND_0402	m42a[55A7]
L7300	IND_0402-LF	m42a[56D6]
L7301	IND_0402-LF	m42a[56D4]
L7302	IND_0402	m42a[56D6]
L7303	IND_0402	m42a[56C6]
L7304	IND_0402	m42a[56C4]
L7305	IND_0402	m42a[56C6]
L7306	IND_0402	m42a[56C4]
L7307	IND_0402	m42a[56C6]
L7350	IND_0402	m42a[56B6]
L7351	IND_0402	m42a[56B4]
L7352	IND_0402	m42a[56B6]
L7353	IND_0402	m42a[56B6]
L7354	IND_0402	m42a[56B4]
L7355	IND_0402	m42a[56B6]
L7356	IND_0402	m42a[56B4]
L7357	IND_0402	m42a[56A6]
L7370	IND_0402	m42a[56B2]
L7371	IND_0402	m42a[56B1]
L7372	IND_0402	m42a[56B2]
L7373	IND_0402	m42a[56B1]
L7374	IND_0402	m42a[56B2]
L7375	IND_0402	m42a[56B1]
L7390	IND_0402	m42a[56D8]
L7400	IND_0402	m42a[57B4]
L7500	IND_SM	m42a[58D2]
L7501	IND_SM	m42a[58B2]
L7620	IND_L812HW	m42a[59B7]
L7680	IND_SM	m42a[59B2]
L7820	IND_3P_SM	m42a[61B3]
L7920	IND_SM	m42a[62B7]
L7960	IND_3P_SM	m42a[62B2]
L8090	IND_CDPH4D19F-SM	m42a[63D1]
L8201	IND_SM-LF	m42a[65A3]
L8202	IND_0402-LF	m42a[65A3]
L8203	IND_0402-LF	m42a[65A3]
L8204	IND_0402-LF	m42a[65A3]
L8205	IND_SM-LF	m42a[65A3]
L8207	IND_0402	m42a[65A7]
L8208	IND_0402	m42a[65A7]
L8209	IND_0402	m42a[65A7]
L8300	IND_3P_SM	m42a[66C4]
L9400	IND_0402-LF	m42a[67D4]
L9401	IND_0402-LF	m42a[67C4]
L9402	IND_0402-LF	m42a[67D4]
L9403	IND_0402-LF	m42a[67D4]
L9404	IND_0402-LF	m42a[67B4]
L9405	IND_0402-LF	m42a[67A4]
L9407	FILTER_4P_SM	m42a[67A4]
L9408	IND_0402-LF	m42a[67B4]
L9500	IND_0402-LF	m42a[68D5]
L9501	IND_0402-LF	m42a[68D5]
L9503	IND_0402-LF	m42a[68D8]
L9504	IND_0402-LF	m42a[68C8]
L9505	IND_0402-LF	m42a[68C8]
L9506	IND_0402-LF	m42a[68D8]
L9804	FILTER_4P_SM1	m42a[69A2]
L9805	FILTER_4P_2012H	m42a[69B2]
L9806	FILTER_4P_2012H	m42a[69B2]
L9807	FILTER_4P_2012H	m42a[69B2]
L9844	IND_SM-1	m42a[69C4]
Q2680	TRA_SINGLE_MOSFET_NC_HN_SOT23	m42a[26A3]
Q3810	TRA_FDC638P_SM-LF	m42a[34C5]
Q3875	TRA_2N7002DW_SOT-363	m42a[34C6 34C7]
Q4590	TRA_FDC638P_SM-LF	m42a[39D5]
Q4591	TRA_2N7002_SOT23-LF	m42a[39C5]
Q5901	TRA_2N7002DW_SOT-363	m42a[46B4 46B5]
Q5950	TRA_2N3906_SOT23-LF	m42a[46A3]
Q5952	TRA_2N7002_SOT23-LF	m42a[46A3]
Q6100	TRA_SI3446DV_TSOP-LF	m42a[48A5]
Q6101	TRA_2N7002DW_SOT-363	m42a[48A6 48A7]
Q6150	TRA_TP0610_SOT23-3	m42a[48C6]
Q6151	TRA_2N7002_SOT23-LF	m42a[48C7]
Q6152	TRA_TP0610_SOT23-3	m42a[48C7]
Q6153	TRA_TP0610_SOT23-3	m42a[48C8]
Q6200	TRA_BC846BM3T5G_NPN_SOT732-3	m42a[49B6]
Q6560	TRA_2N7002_SOT23-LF	m42a[51B3]
Q6650	TRA_2N7002_SOT23-LF	m42a[52B6]
Q6651	TRA_TP0610_SOT23-3	m42a[52B6]
Q7400	TRA_2N7002DW_SOT-363	m42a[57C7 57D7]
Q7401	TRA_2N7002DW_SOT-363	m42a[57D5 57D6]
Q7402	TRA_2N7002DW_SOT-363	m42a[57B7 57C5]
Q7500	TRA_HAT2168H_LFPAK	m42a[58D3]
Q7501	TRA_HAT2165H_LFPAK	m42a[58D4]

WWW.AliSaler.Com

Q7502	TRA_HAT2168H_LFPAK	m42a[58C3]
Q7503	TRA_HAT2165H_LFPAK	m42a[58B4]
Q7504	TRA_HAT2165H_LFPAK	m42a[58D3]
Q7505	TRA_HAT2165H_LFPAK	m42a[58B3]
Q7620	TRA_STL8NH3LL_COMBO_PWRFLT-3P3X3P3	m42a[59C7]
Q7621	TRA_STL8NH3LL_COMBO_PWRFLT-3P3X3P3	m42a[59B7]
Q7660	TRA_STL8NH3LL_COMBO_PWRFLT-3P3X3P3	m42a[59C3]
Q7661	TRA_STL8NH3LL_COMBO_PWRFLT-3P3X3P3	m42a[59B3]
Q7750	TRA_2N7002DW_SOT-363	m42a[60C6 60C7]
Q7820	TRA_IRF7821_SO-8	m42a[61C4]
Q7821	TRA_IRF7832_SO-8	m42a[61B4]
Q7920	TRA_IRF7821_SO-8	m42a[62C6]
Q7921	TRA_IRF7832_SO-8	m42a[62B6]
Q7960	TRA_IRF7821_SO-8	m42a[62C3]
Q7961	TRA_IRF7832_SO-8	m42a[62B3]
Q8000	TRA_FDC638P_SM-LF	m42a[63D4]
Q8005	TRA_STL8NH3LL_COMBO_PWRFLT-3P3X3P3	m42a[63C4]
Q8010	TRA_FDC638P_SM-LF	m42a[63D4]
Q8015	TRA_STL8NH3LL_COMBO_PWRFLT-3P3X3P3	m42a[63C4]
Q8025	TRA_SI3447BDV_SOT-6	m42a[63A4]
Q8030	TRA_2N7002DW_SOT-363	m42a[63A6 63B6]
Q8031	TRA_2N7002DW_SOT-363	m42a[63D6 63A6]
Q8059	TRA_2N7002DW_SOT-363	m42a[63C7 63C7]
Q8060	TRA_2N7002_SOT23-LF	m42a[63C8]
Q8061	TRA_2N7002DW_SOT-363	m42a[63B7 63B7]
Q8062	TRA_2N7002_SOT23-LF	m42a[63B8]
Q8063	TRA_2N7002_SOT23-LF	m42a[63B4]
Q8210	TRA_2N7002DW_SOT-363	m42a[65C6 65C3]
Q8220	TRA_2N7002DW_SOT-363	m42a[65C7 65C6]
Q8240	TRA_TP0610_S0T23-3	m42a[65C5]
Q8250	TRA_SI4405DY_SO-8	m42a[65D2]
Q8298	TRA_TP0610_S0T23-3	m42a[65C7]
Q8299	TRA_2N7002_SOT23-LF	m42a[65C7]
Q8300	TRA_SI4405DY_SO-8	m42a[66D5]
Q8301	TRA_HAT2168H_LFPAK	m42a[66C4]
Q8302	TRA_HAT2165H_LFPAK	m42a[66B4]
Q8320	TRA_SI4405DY_SO-8	m42a[66B3]
Q8321	TRA_SI4405DY_SO-8	m42a[66B3]
Q8322	TRA_2N7002DW_SOT-363	m42a[66A4 66A4]
Q8324	TRA_2N7002DW_SOT-363	m42a[66A3 66A4]
Q8340	TRA_IRLML5203_SM	m42a[66C8]
Q8350	TRA_2N7002_SOT23-LF	m42a[66A6]
Q9403	TRA_FDC638P_SM-LF	m42a[67B6]
Q9404	TRA_2N7002_SOT23-LF	m42a[67B7]
Q9405	TRA_TP0610_S0T23-3	m42a[67D5]
Q9406	TRA_2N7002_SOT23-LF	m42a[67D6]
Q9801	TRA_2N7002DW_SOT-363	m42a[69D6 69D6]
R0610	RES_402	m42a[6A7]
R0611	RES_402	m42a[6A8]
R0612	RES_402	m42a[6A8]
R0621	RES_402	m42a[6A7]
R0702	RES_402	m42a[7D5]
R0703	RES_402	m42a[7C5]
R0704	RES_402	m42a[7C5]
R0705	RES_402	m42a[7B4]
R0706	RES_402	m42a[7B4]
R0707	RES_402	m42a[7A4]
R0712	RES_402	m42a[7A4]
R0716	RES_402	m42a[7B2]
R0717	RES_402	m42a[7B2]
R0718	RES_402	m42a[7B2]
R0719	RES_402	m42a[7B2]
R0720	RES_402	m42a[7B7]
R0721	RES_402	m42a[7B7]
R0722	RES_402	m42a[7A7]
R0730	RES_402	m42a[7A4]
R0802	RES_402	m42a[8B6]
R0803	RES_402	m42a[8A7]
R0921	RES_402	m42a[9D2]
R0922	RES_402	m42a[9D2]
R0923	RES_402	m42a[9C2]
R0924	RES_402	m42a[9C2]
R0925	RES_402	m42a[9C2]
R0926	RES_402	m42a[9C2]
R0927	RES_402	m42a[9C2]
R1001	RES_402	m42a[10B6]
R1002	RES_402	m42a[10B6]
R1005	RES_402	m42a[10C4]
R1006	RES_402	m42a[10C3]
R1100	RES_402	m42a[11B5]
R1101	RES_402	m42a[11C5]
R1102	RES_402	m42a[11B4]
R1103	RES_402	m42a[11C5]
R1104	RES_402	m42a[11B5]
R1106	RES_402	m42a[11A3]
R1210	RES_402	m42a[12C3]
R1211	RES_402	m42a[12C3]
R1220	RES_402	m42a[12B7]
R1221	RES_402	m42a[12B7]
R1225	RES_402	m42a[12B7]
R1226	RES_402	m42a[12B7]
R1230	RES_402	m42a[12A7]
R1231	RES_402	m42a[12A7]
R1235	RES_402	m42a[12A7]
R1236	RES_402	m42a[12A7]
R1310	RES_402	m42a[13D3]
R1410	RES_402	m42a[14C2]
R1411	RES_402	m42a[14C2]
R1420	RES_402	m42a[14C6]
R1421	RES_402	m42a[14C6]
R1422	RES_402	m42a[14B6]
R1430	RES_402	m42a[14B6]
R1440	RES_402	m42a[14D6]
R1441	RES_402	m42a[14D6]
R1950	RES_402	m42a[19D5]
R1951	RES_402	m42a[19D5]
R1975	RES_402	m42a[19A4]
R1985	RES_402	m42a[19D3]
R1986	RES_402	m42a[19C6]
R1987	RES_402	m42a[19C6]
R1988	RES_402	m42a[19C7]
R1989	RES_402	m42a[19C7]
R1990	RES_402	m42a[19C3]
R2058	RES_402	m42a[20B4]
R2059	RES_402	m42a[20B4]
R2060	RES_402	m42a[20A4]
R2075	RES_402	m42a[20C7]
R2077	RES_402	m42a[20B7]
R2079	RES_402	m42a[20B7]
R2085	RES_402	m42a[20C4]
R2100	RES_402	m42a[21C3]
R2101	RES_402	m42a[21C4]
R2105	RES_402	m42a[21D6]
R2107	RES_402	m42a[21C2]
R2108	RES_402	m42a[21C2]
R2110	RES_402	m42a[21C2]
R2194	RES_402	m42a[21D4]
R2195	RES_402	m42a[21C6]
R2196	RES_402	m42a[21C6]
R2197	RES_402	m42a[21C6]
R2198	RES_402	m42a[21C6]
R2199	RES_402	m42a[21C3]
R2200	RES_402	m42a[22D7]
R2203	RES_402	m42a[22C2]
R2204	RES_402	m42a[22C2]
R2205	RES_402	m42a[22C6]
R2206	RES_402	m42a[22C5]
R2207	RES_402	m42a[22C5]
R2208	RES_402	m42a[22D5]
R2211	RES_402	m42a[22B3]
R2223	RES_402	m42a[22D6]
R2225	RES_402	m42a[22D7]
R2226	RES_402	m42a[22D5]
R2250	RES_402	m42a[22D7]
R2251	RES_402	m42a[22D6]
R2255	RES_402	m42a[22D7]
R2299	RES_402	m42a[22B5]
R2300	RES_402	m42a[23C7]
R2302	RES_402	m42a[23D3]
R2303	RES_402	m42a[23D3]
R2305	RES_402	m42a[23D3]
R2306	RES_402	m42a[23B7]
R2307	RES_402	m42a[23A7]
R2308	RES_402	m42a[23B7]
R2309	RES_402	m42a[23A7]
R2310	RES_402	m42a[23A7]
R2311	RES_402	m42a[23A7]
R2312	RES_402	m42a[23A3]
R2313	RES_402	m42a[23A7]
R2314	RES_402	m42a[23A7]
R2315	RES_402	m42a[23A3]
R2316	RES_402	m42a[23D7]
R2317	RES_402	m42a[23D7]
R2318	RES_402	m42a[23D7]
R2319	RES_402	m42a[23D2]
R2320	RES_402	m42a[23D7]
R2323	RES_402	m42a[23D5]
R2326	RES_402	m42a[23D6]
R2327	RES_402	m42a[23D6]
R2343	RES_402	m42a[23D1]
R2388	RES_402	m42a[23B2]
R2389	RES_402	m42a[23A4]
R2390	RES_402	m42a[23B3]
R2395	RES_402	m42a[23D7]
R2396	RES_402	m42a[23D6]
R2397	RES_402	m42a[23D6]
R2398	RES_402	m42a[23D8]
R2399	RES_402	m42a[23C1]
R2500	RES_603	m42a[25A8]
R2501	RES_402	m42a[25C8]
R2502	RES_402	m42a[25D8]
R2600	RES_402	m42a[26D4]
R2606	RES_402	m42a[26D5]
R2607	RES_402	m42a[26D5]
R2609	RES_402	m42a[26C7]
R2610	RES_402	m42a[26C7]
R2611	RES_402	m42a[26B5]
R2612	RES_402	m42a[26A5]
R2622	RES_402	m42a[26A5]
R2636	RES_402	m42a[26C2]
R2637	RES_402	m42a[26C2]
R2638	RES_402	m42a[26C2]
R2639	RES_402	m42a[26C2]
R2640	RES_402	m42a[26C2]
R2641	RES_402	m42a[26C2]
R2642	RES_402	m42a[26C2]
R2643	RES_402	m42a[26C2]
R2680	RES_402	m42a[26B3]
R2681	RES_402	m42a[26B2]
R2682	RES_402	m42a[26A2]
R2683	RES_402	m42a[26B2]
R2684	RES_402	m42a[26B2]
R2685	RES_402	m42a[26B2]
R2687	RES_402	m42a[26B2]
R2688	RES_402	m42a[26A3]
R2689	RES_402	m42a[26A2]
R2696	RES_402	m42a[26C6]
R2697	RES_402	m42a[26C5]
R2698	RES_402	m42a[26C5]
R2700	RES_402	m42a[27D7]
R2701	RES_402	m42a[27D7]
R2750	RES_402	m42a[27D4]
R2751	RES_402	m42a[27D4]
R2760	RES_402	m42a[27C4]
R2761	RES_402	m42a[27C4]
R2770	RES_402	m42a[27D2]
R2771	RES_402	m42a[27D2]
R2780	RES_402	m42a[27C2]
R2781	RES_402	m42a[27C2]
R2782	RES_402	m42a[27B2]
R2783	RES_402	m42a[27B2]
R2800	RES_402	m42a[28D2]
R2801	RES_402	m42a[28D2]
R2900	RES_402	m42a[29A4]
R2901	RES_402	m42a[29D2]
R2902	RES_402	m42a[29D2]
R3001	RES_402	m42a[30D4]
R3009	RES_402	m42a[30D4]
R3011	RES_402	m42a[30C4]
R3025	RES_402	m42a[30C4]
R3035	RES_402	m42a[30B4]
R3100	RES_402	m42a[31C5]
R3104	RES_402	m42a[31C5]
R3300	RES_402	m42a[32B6]
R3301	RES_402	m42a[32B7]
R3302	RES_402	m42a[32D4]
R3303	RES_402	m42a[32C4]
R3304	RES_402	m42a[32C7]
R3400	RES_402	m42a[33C1]
R3401	RES_402	m42a[33C7]
R3402	RES_402	m42a[33C1]
R3403	RES_402	m42a[33C1]
R3404	RES_402	m42a[33D1]
R3405	RES_402	m42a[33C1]
R3406	RES_402	m42a[33B1]
R3407	RES_402	m42a[33B1]
R3408	RES_402	m42a[33C1]
R3409	RES_402	m42a[33C1]
R3410	RES_402	m42a[33C1]
R3411	RES_402	m42a[33D4]
R3412	RES_402	m42a[33D4]
R3413	RES_402	m42a[33D4]
R3414	RES_402	m42a[33D4]
R3415	RES_402	m42a[33D4]
R3416	RES_402	m42a[33D4]
R3417	RES_402	m42a[33C7]
R3418	RES_402	m42a[33B4]
R3419	RES_402	m42a[33B4]
R3420	RES_402	m42a[33A4]
R3421	RES_402	m42a[33A4]
R3422	RES_402	m42a[33C4]
R3423	RES_402	m42a[33C4]
R3426	RES_402	m42a[33C4]
R3427	RES_402	m42a[33C4]
R3428	RES_402	m42a[33C4]
R3429	RES_402	m42a[33D8]
R3430	RES_402	m42a[33D7]
R3431	RES_402	m42a[33B1]
R3432	RES_402	m42a[33D7]
R3433	RES_402	m42a[33D8]
R3434	RES_402	m42a[33D4]
R3435	RES_402	m42a[33C4]
R3436	RES_402	m42a[33B1]
R3437	RES_402	m42a[33B1]
R3438	RES_402	m42a[33D1]
R3439	RES_402	m42a[33D1]
R3440	RES_402	m42a[33D1]
R3441	RES_402	m42a[33D1]
R3442	RES_402	m42a[33C1]
R3450	RES_402	m42a[33C7]
R3451	RES_402	m42a[33B7]
R3452	RES_402	m42a[33B7]
R3453	RES_402	m42a[33B7]
R3454	RES_402	m42a[33B7]
R3463	RES_402	m42a[33D7]
R3465	RES_402	m42a[33C4]
R3466	RES_402	m42a[33A7]
R3467	RES_402	m42a[33A7]
R3468	RES_402	m42a[33C7]
R3469	RES_402	m42a[33C7]
R3470	RES_402	m42a[33C7]
R3471	RES_402	m42a[33B7]
R3472	RES_402	m42a[33B7]
R3473	RES_402	m42a[33B7]
R3474	RES_402	m42a[33B8]
R3475	RES_402	m42a[33B7]
R3476	RES_402	m42a[33A7]
R3477	RES_402	m42a[33B4]
R3478	RES_402	m42a[33B4]
R3480	RES_402	m42a[33C7]
R3481	RES_402	m42a[33B1]
R3482	RES_402	m42a[33B1]
R3490	RES_402	m42a[33A4]
R3824	RES_402	m42a[34C4]
R3825	RES_402	m42a[34C5]
R3851	RES_402	m42a[34C4]
R3853	RES_402	m42a[34C3]
R3858	RES_402	m42a[34B5]
R3859	RES_402	m42a[34B4]
R3865	RES_402	m42a[34C6]
R3876	RES_402	m42a[34C7]
R3877	RES_402	m42a[34C6]
R3900	RES_402	m42a[35D3]
R3901	RES_402	m42a[35C3]
R3950	RES_402	m42a[35B7]
R4101	RES_402	m42a[36D8]
R4102	RES_402	m42a[36C8]
R4103	RES_402	m42a[36B4]
R4104	RES_402	m42a[36B4]
R4105	RES_402	m42a[36B4]
R4106	RES_402	m42a[36B5]
R4107	RES_402	m42a[36D8]
R4117	RES_402	m42a[36B3]
R4118	RES_402	m42a[36B3]
R4119	RES_402	m42a[36B3]
R4120	RES_402	m42a[36B4]
R4122	RES_402	m42a[36A3]
R4123	RES_402	m42a[36A2]
R4124	RES_402	m42a[36A2]
R4130	RES_402	m42a[36B6]
R4131	RES_402	m42a[36B6]
R4200	RES_402	m42a[37A6]
R4201	RES_402	m42a[37A5]
R4202	RES_402	m42a[37A5]
R4203	RES_402	m42a[37A5]
R4400	RES_402	m42a[38C3]
R4420	RES_402	m42a[38C2]
R4431	RES_402	m42a[38A6]
R4432	RES_402	m42a[38A6]
R4452	RES_402	m42a[38C3]
R4500	RES_402	m42a[39B6]
R4501	RES_402	m42a[39B6]
R4502	RES_402	m42a[39B5]
R4503	RES_402	m42a[39B5]
R4504	RES_402	m42a[39A5]
R4550	RES_402	m42a[39A7]
R4590	RES_402	m42a[39C5]
R4591	RES_402	m42a[39C5]
R4593	RES_402	m42a[39C6]
R4594	RES_402	m42a[39C6]
R4595	RES_402	m42a[39C5]
R4910	RES_402	m42a[40C6]
R5100	RES_402	m42a[41C6]
R5250	RES_402	m42a[42C8]
R5251	RES_402	m42a[42C8]
R5301	RES_402	m42a[43B4]
R5302	RES_402	m42a[43B4]
R5303	RES_402	m42a[43C4]
R5801	RES_402	m42a[45D1]
R5802	RES_402	m42a[45C1]
R5803	RES_402	m42a[45C1]
R5809	RES_402	m42a[45D2]
R5898	RES_402	m42a[45C2]
R5899	RES_402	m42a[45D3]
R5900	RES_402	m42a[46D7]
R5901	RES_603	m42a[46D8]
R5905	RES_402	m42a[46D4]
R5906	RES_402	m42a[46D4]
R5910	RES_603	m42a[46C8]
R5911	RES_402	m42a[46A6]
R5918	RES_402	m42a[46C5]
R5919	RES_402	m42a[46C5]
R5920	RES_402	m42a[46C5]
R5922	RES_402	m42a[46C5]
R5923	RES_402	m42a[46C5]
R5924	RES_402	m42a[46C4]
R5925	RES_402	m42a[46C5]
R5926	RES_402	m42a[46C4]
R5927	RES_402	m42a[46C5]
R5928	RES_402	m42a[46D4]
R5929	RES_402	m42a[46C5]
R5930	RES_402	m42a[46C5]
R5931	RES_402	m42a[46C4]
R5932	RES_402	m42a[46C4]
R5933	RES_402	m42a[46C4]
R5934	RES_402	m42a[46C5]
R5935	RES_402	m42a[46C4]
R5936	RES_402	m42a[46C5]
R5937	RES_402	m42a[46C4]
R5938	RES_402	m42a[46C5]
R5939	RES_402	m42a[46C4]
R5940	RES_402	m42a[46C5]
R5941	RES_402	m42a[46C4]
R5942	RES_402	m42a[46C5]
R5943	RES_402	m42a[46B4]
R5944	RES_402	m42a[46B4]
R5945	RES_402	m42a[46C4]
R5946	RES_402	m42a[46C4]
R5947	RES_402	m42a[46B4]
R5948	RES_402	m42a[46C5]
R5949	RES_402	m42a[46C4]
R5950	RES_402	m42a[46A3]
R5951	RES_402	m42a[46A3]
R5952	RES_402	m42a[46A3]
R5953	RES_402	m42a[46D5]
R5954	RES_402	m42a[46B5]
R5955	RES_402	m42a[46B5]
R5970	RES_402	m42a[46D3]
R5971	RES_402	m42a[46D3]
R5972	RES_402	m42a[46C7]
R5973	RES_402	m42a[46C5]
R5976	RES_402	m42a[46D1]
R5977	RES_402	m42a[46C1]
R5980	RES_402	m42a[46D5]
R5981	RES_402	m42a[46D5]
R5982	RES_402	m42a[46D5]
R5983	RES_402	m42a[46C5]
R5984	RES_402	m42a[46C5]
R5985	RES_402	m42a[46C5]
R5986	RES_402	m42a[46C5]
R5987	RES_402	m42a[46C5]
R5988	RES_402	m42a[46B5]
R5989	RES_402	m42a[46D5]
R5990	RES_402	m42a[46B2]
R5991	RES_402	m42a[46B2]
R5992	RES_402	m42a[46B2]
R5993	RES_402	m42a[46B2]
R5994	RES_402	m42a[46D5]
R5995	RES_402	m42a[46D5]
R5996	RES_402	m42a[46B4]
R5997	RES_402	m42a[46B4]
R5998	RES_402	m42a[46C4]
R5999	RES_402	m42a[46C4]
R6100	RES_402	m42a[48D3]
R6102	RES_402	m42a[48C2]
R6103	RES_402	m42a[48C3]
R6105	RES_402	m42a[48D4]
R6106	RES_402	m42a[48C4]
R6107	RES_402	m42a[48D4]
R6108	RES_402	m42a[48C4]
R6112	RES_402	m42a[48B2]
R6140	RES_402	m42a[48A7]
R6141	RES_402	m42a[48A7]
R6142	RES_402	m42a[48A6]
R6143	RES_1206	m42a[48A4]
R6144	RES_402	m42a[48A6]
R6150	RES_402	m42a[48C6]
R6151	RES_402	m42a[48B6]
R6152	RES_402	m42a[48C7]
R6153	RES_402	m42a[48B7]
R6200	RES_402	m42a[49C5]
R6201	RES_402	m42a[49C5]
R6203	RES_402	m42a[49D3]
R6251	RES_402	m42a[49A5]
R6252	RES_402	m42a[49B3]
R6301	RES_402	m42a[50D4]
R6302	RES_402	m42a[50D4]
R6303	RES_402	m42a[50C3]
R6306	RES_402	m42a[50C2]
R6307	RES_402	m42a[50C5]
R6308	RES_402	m42a[50D3]
R6309	RES_402	m42a[50C5]
R6560	RES_402	m42a[51C3]
R6561	RES_402	m42a[51B4]
R6565	RES_402	m42a[51C3]
R6621	RES_402	m42a[52A5]
R6650	RES_402	m42a[52B6]
R6652	RES_402	m42a[52B7]
R6700	RES_402	m42a[53C7]
R6702	RES_402	m42a[53C4]
R6703	RES_402	m42a[53C4]
R6704	RES_805	m42a[53C2]
R6705	RES_805	m42a[53C3]
R6798	RES_402	m42a[53B6]
R6799	RES_402	m42a[53B6]
R6800	RES_402	m42a[54C6]
R6801	RES_402	m42a[54B5]
R6802	RES_402	m42a[54A5]
R6807	RES_402	m42a[54D7]
R6808	RES_402	m42a[54D3]
R6809	RES_402	m42a[54C3]
R6810	RES_402	m42a[54A4]
R6811	RES_402	m42a[54A4]
R6850	RES_402	m42a[54B7]
R6851	RES_402	m42a[54B7]
R6852	RES_402	m42a[54B7]
R6853	RES_402	m42a[54A7]
R6854	RES_402	m42a[54B4]
R7201	RES_402	m42a[55C4]
R7202	RES_402	m42a[55A4]

WWW.AliSaler.Com

R7210	RES_402	m42a[55A7]
R7260	RES_402	m42a[55D2]
R7261	RES_402	m42a[55C2]
R7270	RES_402	m42a[55C2]
R7271	RES_402	m42a[55C2]
R7280	RES_402	m42a[55B2]
R7281	RES_402	m42a[55B2]
R7300	RES_402	m42a[56C4]
R7301	RES_402	m42a[56C4]
R7320	RES_402	m42a[56B5]
R7321	RES_402	m42a[56D7]
R7322	RES_402	m42a[56B7]
R7349	RES_402	m42a[56B7]
R7350	RES_402	m42a[56A4]
R7351	RES_402	m42a[56A4]
R7380	RES_402	m42a[56C2]
R7382	RES_402	m42a[56B2]
R7391	RES_402	m42a[56C7]
R7401	RES_402	m42a[57D8]
R7402	RES_402	m42a[57D7]
R7403	RES_402	m42a[57C7]
R7404	RES_402	m42a[57C4]
R7405	RES_402	m42a[57D5]
R7406	RES_402	m42a[57D6]
R7411	RES_402	m42a[57C8]
R7412	RES_402	m42a[57B7]
R7413	RES_402	m42a[57C6]
R7414	RES_402	m42a[57C4]
R7415	RES_402	m42a[57C5]
R7430	RES_603	m42a[57C3]
R7431	RES_603	m42a[57B3]
R7432	RES_402	m42a[57B3]
R7433	RES_402	m42a[57A3]
R7434	RES_402	m42a[57C2]
R7435	RES_402	m42a[57C2]
R7436	RES_402	m42a[57B2]
R7437	RES_402	m42a[57B2]
R7438	RES_402	m42a[57C2]
R7439	RES_402	m42a[57B2]
R7440	RES_402	m42a[57A5]
R7450	RES_402	m42a[57A7]
R7451	RES_402	m42a[57A7]
R7452	RES_402	m42a[57A7]
R7453	RES_402	m42a[57A7]
R7454	RES_402	m42a[57A7]
R7460	RES_402	m42a[57C6]
R7461	RES_402	m42a[57C7]
R7500	RES_402	m42a[58C2]
R7501	RES_402	m42a[58C2]
R7502	RES_805	m42a[58B3]
R7503	RES_805	m42a[58D3]
R7504	RES_402	m42a[58C1]
R7505	RES_402	m42a[58B2]
R7506	RES_402	m42a[58C7]
R7507	RES_402	m42a[58B1]
R7508	RES_402	m42a[58B8]
R7509	RES_402	m42a[58B8]
R7510	RES_402	m42a[58B6]
R7511	RES_402	m42a[58B8]
R7512	RES_402	m42a[58D7]
R7513	RES_402	m42a[58B7]
R7514	RES_402	m42a[58B8]
R7515	RES_402	m42a[58B5]
R7516	RES_402	m42a[58B4]
R7517	RES_402	m42a[58B5]
R7518	RES_402	m42a[58B5]
R7519	RES_402	m42a[58C7]
R7520	RES_402	m42a[58D7]
R7521	RES_402	m42a[58D8]
R7522	RES_402	m42a[58A5]
R7523	RES_402	m42a[58A6]
R7524	RES_402	m42a[58D5]
R7525	RES_402	m42a[58C5]
R7526	THERMISTER_402	m42a[58C7]
R7527	RES_402	m42a[58C8]
R7530	RES_402	m42a[58B4]
R7531	THERMISTER_0603-LF	m42a[58B4]
R7543	RES_402	m42a[58B2]
R7545	RES_402	m42a[58C7]
R7600	RES_402	m42a[59C5]
R7603	RES_402	m42a[59A3]
R7604	RES_402	m42a[59A3]
R7606	RES_402	m42a[59A3]
R7607	RES_402	m42a[59A3]
R7621	RES_402	m42a[59C7]
R7624	RES_402	m42a[59C6]
R7625	RES_402	m42a[59B6]
R7626	RES_402	m42a[59C7]
R7627	RES_402	m42a[59B7]
R7628	RES_402	m42a[59B7]
R7629	RES_402	m42a[59C7]
R7630	RES_402	m42a[59C5]
R7661	RES_402	m42a[59C2]
R7664	RES_402	m42a[59C3]
R7665	RES_402	m42a[59B4]
R7666	RES_402	m42a[59C2]
R7667	RES_402	m42a[59B2]
R7668	RES_402	m42a[59B2]
R7669	RES_402	m42a[59C2]
R7670	RES_402	m42a[59C4]
R7720	RES_402	m42a[60B3]
R7721	RES_402	m42a[60A3]
R7750	RES_402	m42a[60C6]
R7751	RES_402	m42a[60C7]
R7752	RES_402	m42a[60C7]
R7753	RES_402	m42a[60B7]
R7800	RES_402	m42a[61C4]
R7801	RES_402	m42a[61B2]
R7802	RES_1206	m42a[61C3]
R7803	RES_402	m42a[61C2]
R7804	RES_402	m42a[61C7]
R7805	RES_402	m42a[61B7]
R7806	RES_402	m42a[61B7]
R7807	RES_402	m42a[61C5]
R7808	RES_402	m42a[61B6]
R7810	RES_402	m42a[61B4]
R7821	RES_402	m42a[61B2]
R7822	RES_402	m42a[61B2]
R7860	RES_603	m42a[61C3]
R7861	RES_402	m42a[61C2]
R7863	RES_402	m42a[61C2]
R7900	RES_402	m42a[62C5]
R7901	RES_402	m42a[62B1]
R7902	RES_1206	m42a[62A7]

R7903	RES_402	m42a[62A3]
R7904	RES_402	m42a[62A3]
R7905	RES_402	m42a[62A6]
R7906	RES_402	m42a[62A3]
R7907	RES_402	m42a[62A3]
R7921	RES_402	m42a[62C7]
R7924	RES_402	m42a[62C6]
R7925	RES_402	m42a[62B6]
R7926	RES_402	m42a[62C7]
R7927	RES_402	m42a[62B8]
R7928	RES_402	m42a[62B8]
R7929	RES_402	m42a[62C7]
R7930	RES_402	m42a[62C5]
R7961	RES_402	m42a[62C2]
R7964	RES_402	m42a[62C3]
R7965	RES_402	m42a[62B3]
R7966	RES_402	m42a[62C2]
R7967	RES_402	m42a[62B2]
R7968	RES_402	m42a[62B2]
R7969	RES_402	m42a[62C2]
R7970	RES_402	m42a[62C4]
R7990	RES_402	m42a[62A6]
R7991	RES_402	m42a[62A6]
R7992	RES_603	m42a[62A7]
R8000	RES_402	m42a[63D5]
R8005	RES_402	m42a[63C5]
R8010	RES_402	m42a[63C5]
R8015	RES_402	m42a[63B5]
R8025	RES_402	m42a[63A5]
R8030	RES_402	m42a[63B6]
R8031	RES_402	m42a[63B6]
R8032	RES_402	m42a[63D6]
R8033	RES_402	m42a[63D6]
R8050	RES_402	m42a[63A6]
R8056	RES_402	m42a[63C8]
R8057	RES_402	m42a[63C8]
R8058	RES_402	m42a[63B8]
R8059	RES_402	m42a[63B8]
R8061	RES_402	m42a[63B1]
R8062	RES_402	m42a[63B1]
R8063	RES_402	m42a[63A1]
R8064	RES_402	m42a[63A1]
R8065	RES_402	m42a[63B2]
R8091	RES_402	m42a[63D1]
R8092	RES_402	m42a[63C1]
R8200	RES_402	m42a[65B7]
R8201	RES_402	m42a[65C5]
R8202	RES_402	m42a[65C5]
R8203	RES_402	m42a[65C6]
R8204	RES_402	m42a[65C6]
R8205	RES_805	m42a[65D4]
R8206	RES_402	m42a[65C4]
R8207	RES_402	m42a[65C4]
R8208	RES_402	m42a[65C4]
R8209	RES_402	m42a[65C4]
R8210	RES_402	m42a[65C4]
R8211	RES_402	m42a[65C6]
R8213	RES_402	m42a[65C2]
R8214	RES_402	m42a[65C2]
R8231	RES_402	m42a[65C5]
R8232	RES_402	m42a[65C6]
R8233	RES_402	m42a[65C5]
R8296	RES_402	m42a[65B7]
R8297	RES_402	m42a[65C3]
R8298	RES_402	m42a[65C8]
R8299	RES_402	m42a[65C7]
R8300	RES_402	m42a[66C6]
R8301	RES_402	m42a[66C7]
R8302	RES_402	m42a[66C5]
R8303	RES_402	m42a[66C5]
R8304	RES_805	m42a[66B2]
R8305	RES_402	m42a[66C5]
R8306	RES_402	m42a[66C7]
R8308	RES_0612	m42a[66C3]
R8309	RES_402	m42a[66B6]
R8310	RES_402	m42a[66C5]
R8311	RES_402	m42a[66B7]
R8312	RES_402	m42a[66C7]
R8320	RES_2525	m42a[66B3]
R8322	RES_402	m42a[66A3]
R8323	RES_402	m42a[66A3]
R8324	RES_402	m42a[66A4]
R8325	RES_402	m42a[66A5]
R8330	RES_402	m42a[66B4]
R8331	RES_402	m42a[66A4]
R8340	RES_402	m42a[66C8]
R8341	RES_402	m42a[66B8]
R8342	RES_402	m42a[66C8]
R8343	RES_402	m42a[66B8]
R8344	RES_402	m42a[66B8]
R8350	RES_402	m42a[66B5]
R8351	RES_402	m42a[66B6]
R8352	RES_402	m42a[66B5]
R8360	RES_402	m42a[66D7]
R8361	RES_402	m42a[66C7]
R8362	RES_402	m42a[66B7]
R8363	RES_402	m42a[66B6]
R8364	RES_402	m42a[66B6]
R8365	RES_402	m42a[66B6]
R8367	RES_402	m42a[66C6]
R8370	RES_402	m42a[66C2]
R8371	RES_402	m42a[66B2]
R8381	RES_603	m42a[66B4]
R8397	RES_0612	m42a[66C4]
R9400	RES_402	m42a[67D6]
R9401	RES_402	m42a[67D6]
R9402	RES_402	m42a[67C7]
R9408	RES_402	m42a[67B5]
R9409	RES_402	m42a[67B5]
R9413	RES_402	m42a[67A6]
R9414	RES_402	m42a[67B7]
R9415	RES_402	m42a[67B7]
R9416	RES_402	m42a[67B7]
R9423	RES_402	m42a[67B6]
R9428	RES_402	m42a[67C5]
R9500	RES_402	m42a[68A7]
R9501	RES_402	m42a[68B6]
R9502	RES_402	m42a[68B6]
R9503	RES_402	m42a[68A4]
R9504	RES_402	m42a[68B2]
R9505	RES_402	m42a[68B2]
R9506	RES_402	m42a[68B1]
R9507	RES_402	m42a[68D2]
R9508	RES_402	m42a[68D2]

R9509	RES_402	m42a[68C2]
R9510	RES_402	m42a[68C2]
R9537	RES_402	m42a[68D1]
R9538	RES_402	m42a[68D1]
R9539	RES_402	m42a[68C1]
R9540	RES_402	m42a[68C1]
R9821	RES_402	m42a[69D7]
R9822	RES_402	m42a[69D6]
R9850	RES_402	m42a[69B8]
R9851	RES_402	m42a[69B8]
R9852	RES_402	m42a[69A8]
R9853	RES_402	m42a[69A8]
R9854	RES_402	m42a[69A8]
R9855	RES_402	m42a[69A8]
R9856	RES_402	m42a[69B6]
R9859	RES_402	m42a[69A6]
R9860	RES_402	m42a[69C3]
R9861	RES_402	m42a[69C3]
R9862	RES_402	m42a[69C5]
R9863	RES_402	m42a[69C5]
R9864	RES_402	m42a[69A6]
R9868	RES_402	m42a[69C8]
R9869	RES_402	m42a[69C8]
R9870	RES_402	m42a[69C1]
R9871	RES_402	m42a[69C1]
RP2300	RPAK4P_SM-LF	m42a[23D5]
RP2600	RPAK4P_SM-LF	m42a[26D2]
RP2601	RPAK4P_SM-LF	m42a[26D2]
RP2602	RPAK4P_SM-LF	m42a[26C2]
RP3000	RPAK4P_SM-LF	m42a[30B4 30C4 30D4 30D4]
RP3001	RPAK4P_SM-LF	m42a[30C4 30A4 30A4 30D4]
RP3002	RPAK4P_SM-LF	m42a[30A4 30A4 30A4 30D4]
RP3003	RPAK4P_SM-LF	m42a[30C4 30C4 30C4 30D4]
RP3004	RPAK4P_SM-LF	m42a[30C4 30C4 30D4]
RP3005	RPAK4P_SM-LF	m42a[30B4 30A4 30A4 30D4]
RP3006	RPAK4P_SM-LF	m42a[30B4 30B4 30A4 30D4]
RP3007	RPAK4P_SM-LF	m42a[30C4 30C4 30C4 30C4]
RP3008	RPAK4P_SM-LF	m42a[30C4 30C4 30C4 30C4]
RP3009	RPAK4P_SM-LF	m42a[30B4 30B4 30C4 30C4]
RP3010	RPAK4P_SM-LF	m42a[30B4 30B4 30B4 30B4]
RP3011	RPAK4P_SM-LF	m42a[30B4 30A4 30B4 30B4]
T4201	XFR_1000BT_82400275_ XFR-SM	m42a[37C6]
T4202	XFR_1000BT_82400275_ XFR-SM	m42a[37B6]
U0700	CPU_YONAH_BGA	m42a[7C3 7D7]
U0700	CPU_YONAH_BGA	m42a[8D8 8D4]
U1001	ADT7461_MSOP	m42a[10C5]
U1200	NB_945GM_BGA	m42a[12D5]
U1200	NB_945GM_BGA	m42a[13D4]
U1200	NB_945GM_BGA	m42a[14D5]
U1200	NB_945GM_BGA	m42a[15D3 15D7]
U1200	NB_945GM_BGA	m42a[16D2 16C8]
U1200	NB_945GM_BGA	m42a[17D5]
U1200	NB_945GM_BGA	m42a[18D4 18D7]
U1900	LREG_TPS73115_SOT23-5	m42a[19D6]
U1901	MM157_SOT23-5-LF	m42a[19C4]
U2100	SB_ICH7M_BGA	m42a[21D6]
U2100	SB_ICH7M_BGA	m42a[22B7 22D3]
U2100	SB_ICH7M_BGA	m42a[23D4]
U2100	SB_ICH7M_BGA	m42a[24D4 24D7]
U2601	MC74VHC1G08_SC70	m42a[26A5]
U2603	MC74VHC1G00_SC70-5	m42a[26A7]
U2680	MC74VHC1G08_SC70	m42a[26B3]
U3100	LREG_BD3533FVM_MSOP-8	m42a[31C4]
U3301	CLK_SYN_SLG8LP436_QFN	m42a[32C5]
U4101	88E8053_QFN	m42a[36D6]
U4102	EEPROM_M24C08_SO8	m42a[36A3]
U4400	FW32306_BGA_BGA	m42a[38C5]
U5100	CY8C24794_MLF	m42a[41C5]
U5200	SWI_TPS2042B_MSOP	m42a[42C7]
U5800	SMC_H8S2116_BGA	m42a[45A8 45C3 45C7 45D7]
U5900	VDET_RN5VD_SOT23-5	m42a[46D7]
U5910	OSC_12P_SG-3040LC-SM	m42a[46A7]
U5977	COMPARATOR_LMC7211_SM-LF	m42a[46C2]
U6100	OPAMP_LMV2011_SOT23-5	m42a[48C3]
U6200	MAX6695_UMAX	m42a[49D4]
U6250	MAX6695_UMAX	m42a[49B4]
U6301	FLASH_SST25VF016B_SOI_SOI	m42a[50D3]
U6620	KXM52_QFN	m42a[52C5]
U6650	LIS3L02AL_LGA	m42a[52B5]
U6700	TPM_TSSOP	m42a[53C5]
U6800	AUDIO_STAC92204XR_LQFP	m42a[54D5]
U7210	MAX9705_TDFN1	m42a[55C5]
U7220	MAX9705_TDFN1	m42a[55B5]
U7230	MAX9705_TDFN1	m42a[55A5]
U7400	MAX9890_UCSP1	m42a[57C2]
U7500	ISL6262_QFN	m42a[58C6]
U7600	LTC3728L_QFN	m42a[59C5]
U7700	MAX8887_SOT23-5	m42a[60D4]
U7701	MAX8887_SOT23-5	m42a[60C4]
U7720	LREG_MAX8516_SOP	m42a[60B3]
U7800	ISL6269_QFN	m42a[61C5]
U7801	AMP_INA326_MSOP	m42a[61C2]
U7900	LTC3728L_QFN	m42a[62C5]
U7901	AMP_INA326_MSOP	m42a[62A6]
U8070	LTC2908_LLP	m42a[63B2]
U8080	MC74VHC1G08_SC70	m42a[63B1]
U8090	LT3470_TSOT23-8	m42a[63D3]
U8200	COMPARATOR_LMC7211_SM-LF	m42a[65C4]
U8250	MC74VHC1G08_SC70	m42a[65C3]
U8290	COMPARATOR_LM397_SOT23-5	m42a[65C5]
U8300	ISL6255_QFN	m42a[66C6]
U8370	INA193_SOT23-5	m42a[66C3]
U8375	INA193_SOT23-5	m42a[66B2]
U9453	MC74VHC1G08_SC70	m42a[67C5]
U9500	SIL1362_LQFP	m42a[68B4]
U9801	VIDEO_TS3V330_SOP	m42a[69B7]
U9804	SN74LVC2G125_US	m42a[69C2 69C2]
VR5965	VREF_ISL6000233_SOT23-3	m42a[46C7]
VR6800	LREG_TPS79501_SOT223-6	m42a[54A5]
XW5800	SHORT_SM	m42a[45C3]
XW7200	SHORT_SM	m42a[55A5]

XW7300	SHORT_SM	m42a[56C4]
XW7301	SHORT_SM	m42a[56B4]
XW7302	SHORT_SM	m42a[56C2]
XW7303	SHORT_SM	m42a[56C2]
XW7304	SHORT_SM	m42a[56B2]
XW7305	SHORT_SM	m42a[56B7]
XW7400	SHORT_SM	m42a[57A7]
XW7500	SHORT_SM	m42a[58A6]
XW7600	SHORT_SM	m42a[59A5]
XW7620	JUMPER_OPEN-SAWTOOTH	m42a[59B8]
XW7660	JUMPER_OPEN-SAWTOOTH	m42a[59B1]
XW7800	SHORT_SM	m42a[61B5]
XW7900	SHORT_SM	m42a[62A5]
XW7920	JUMPER_OPEN-SAWTOOTH	m42a[62B8]
XW8101	SHORT_SM	m42a[64B2]
XW8102	SHORT_SM	m42a[64B2]
XW8300	SHORT_SM	m42a[66B4]
Y2600	CRYSTAL_4PIN_SM-LF	m42a[26C7]
Y3301	CRYSTAL_5X3.2-SM	m42a[32C7]
Y4101	CRYSTAL_4PIN_SM-3.2X2.5MM	m42a[36B6]
Y4403	CRYSTAL_4PIN_SM-3.2X2.5MM	m42a[38C2]
Y5920	CRYSTAL_5X3.2-SM	m42a[46C7]
Y6795	CRYSTAL_4PIN_SM-LF	m42a[53B6]
Z0601	MTGHOLE	m42a[6B8]
Z0602	MTGHOLE	m42a[6C6]
Z0603	PCB_STANDOFF	m42a[6A8]
Z0604	PCB_STANDOFF	m42a[6A6]
Z0605	PCB_STANDOFF	m42a[6A8]
Z0606	MTGHOLE	m42a[6D6]
Z0607	MTGHOLE	m42a[6C6]
Z0608	MTGHOLE	m42a[6C6]
Z0609	MTGHOLE	m42a[6B7]
Z0610	MTGHOLE	m42a[6B6]
Z0611	MTGHOLE	m42a[6B7]
Z0612	PCB_STANDOFF	m42a[6A6]
Z0613	PCB_STANDOFF	m42a[6A5]
Z0621	PCB_STANDOFF	m42a[6A6]
ZS0620	SPRING_CLIP_1P_EMI_C LIP-SM-M42	m42a[6D7]
ZS0621	CLIP_SM	m42a[6D6]

WWW.AliSaler.Com